



# **SPECTRA RIO MEDIAENGINE**

## **USER GUIDE**

***[www.SpectraLogic.com](http://www.SpectraLogic.com)***

## COPYRIGHT

Copyright © 2019-2026 Spectra Logic Corporation. All rights reserved. This item and the information contained herein are the property of Spectra Logic Corporation.

## NOTICES

Except as expressly stated herein, Spectra Logic Corporation makes its products and associated documentation on an "AS IS" BASIS, WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, BOTH OF WHICH ARE EXPRESSLY DISCLAIMED. In no event shall Spectra Logic be liable for any loss of profits, loss of business, loss of use or data, interruption of business, or for indirect, special, incidental or consequential damages of any kind, even if Spectra Logic has been advised of the possibility of such damages arising from any defect or error.

Information furnished in this manual is believed to be accurate and reliable. However, no responsibility is assumed by Spectra Logic for its use. Due to continuing research and development, Spectra Logic may revise this publication from time to time without notice, and reserves the right to change any product specification at any time without notice.

## TRADEMARKS

ArcticBlue, BlackPearl, BlueScale, RioBroker, Spectra Cube, Spectra Logic, Spectra Vail, Spectra, SpectraGuard, StorCycle, TeraPack, TFinity, and TranScale are registered trademarks of Spectra Logic Corporation. All rights reserved worldwide. All other trademarks and registered trademarks are the property of their respective owners.

## PART NUMBER

90990141 Revision L

## REVISION HISTORY

Revision	Date	Description
D	June 2020	Updated for Rio MediaEngine 2.1.0 release.
E	June 2021	Updated for Rio MediaEngine 3.1.0 release.
F	October 2021	Updated for Rio MediaEngine 3.2.0 release.
G	January 2023	Updated for Rio MediaEngine 3.4.2 release.
H	December 2023	Updated for Rio MediaEngine 3.5.0 release.
I	May 2024	Updated for Rio MediaEngine 4.0.0 release.
J	February 2025	Updated for Rio MediaEngine 4.1.0 release.
K	August 2025	Updated for Rio MediaEngine 5.0.0 release.
L	January 2026	Updated for Rio MediaEngine 5.1.0 release.

# CONTACTING SPECTRA LOGIC

<b>To Obtain General Information</b>	
<b>Spectra Logic Website:</b> <a href="http://spectralogic.com">spectralogic.com</a>	
<b>United States Headquarters</b>	<b>European Office</b>
Spectra Logic Corporation 6285 Lookout Road Boulder, CO 80301 USA  <b>Phone:</b> 1.800.833.1132 or 1.303.449.6400 <b>International:</b> 1.303.449.6400 <b>Fax:</b> 1.303.939.8844	Spectra Logic Europe Ltd. 329 Doncastile Road Bracknell Berks, RG12 8PE United Kingdom  <b>Phone:</b> 44 (0) 870.112.2150 <b>Fax:</b> 44 (0) 870.112.2175
<b>Spectra Logic Technical Support</b>	
<b>Technical Support Portal:</b> <a href="http://support.spectralogic.com">support.spectralogic.com</a>	
<b>United States and Canada</b> <b>Phone:</b>  <b>Toll free US and Canada:</b> 1.800.227.4637 <b>International:</b> 1.303.449.0160	<b>Europe, Middle East, Africa</b> <b>Phone:</b> 44 (0) 870.112.2185  <b>Deutsch Sprechende Kunden</b> <b>Phone:</b> 49 (0) 6028.9796.507
<b>Additional international numbers available at</b> <a href="http://support.spectralogic.com/home">support.spectralogic.com/home</a> <b>If you have a Spectra Logic Portal account, please log in for country-specific numbers at</b> <a href="http://support.spectralogic.com/support-contact-info">support.spectralogic.com/support-contact-info</a>	
<b>Spectra Logic Sales</b>	
<b>Website:</b> <a href="http://shop.spectralogic.com">shop.spectralogic.com</a>	
<b>United States and Canada</b> <b>Phone:</b> 1.800.833.1132 or 1.303.449.6400  <b>Fax:</b> 1.303.939.8844  <b>Email:</b> sales@spectralogic.com	<b>Europe</b> <b>Phone:</b> 44 (0) 870.112.2150  <b>Fax:</b> 44 (0) 870.112.2175  <b>Email:</b> eurosales@spectralogic.com
<b>To Obtain Documentation</b>	
<a href="http://support.spectralogic.com/documentations">support.spectralogic.com/documentations</a>	

# MASTER LICENSE AGREEMENT

This Master License Agreement governs use of Spectra Logic Corporation stand-alone software such as StorCycle software ("Software"). Your organization has agreed to the license contained herein and terms and conditions of this Master License Agreement (the "MLA"). Use of the Software is affirmation of your acceptance and grants to your organization ("Licensee") the right to use the Software.

## 1. License.

**1.1 Grant of License.** Subject to all of the terms and conditions of this MLA, Spectra Logic Corporation and its wholly-owned subsidiaries ("Spectra") grant to Licensee a non-transferable, non-sublicensable, non-exclusive license during the applicable Term (as defined below) to use the object code form of the Software specified in the quote supplied either by Spectra or an authorized reseller internally and for operational use, and only in accordance with the technical specification documentation generally made available by Spectra to its licensees with regard to the Software ("Documentation"). The term "Software" will include any Documentation and any ordered Support and maintenance releases of the same specific Software product provided to Licensee under this MLA.

**1.2 Term and Renewals.** The Software is licensed under a subscription basis or is permanently licensed, as defined herein. Licensee's Software license is stated on the quote provided to Licensee.

(a) If the Software is ordered on a subscription basis ("Subscription"), the term of the software license will (i) commence upon receipt of a purchase order issued to Spectra directly from Licensee or from an authorized reseller issued on your behalf and will (ii) continue for the number of year(s) noted on the quote commencing on the date of activation of key(s) performed by Spectra Professional Services ("Subscription Term"). Unless terminated earlier in accordance with section 4, each Software Subscription Term will automatically renew upon expiration of the initial Software Subscription Term for additional successive terms unless either party gives the other prior written notice of cancellation at least thirty (30) days prior to expiration of the then-current term. Unless otherwise specified on the quote, the license fee for any Software Subscription Term renewal will be based on the then-current Subscription rates.

(b) If the Software is ordered on a permanent license basis ("Permanent"), the term of the software license will not expire except in accordance with section 4. The term of associated products such as support, user, server and storage elections will commence upon on the date of activation of key(s) performed by Spectra Professional Services and may be renewed at such time as the term of such quoted election(s) expire.

**1.3 Installation.** Software may be installed on Licensee's computers only by Licensee's employees, authorized resellers, or by Spectra Professional Services as requested by Licensee.

**1.4 License Restrictions.** Licensee shall not (and shall not allow any third party) to

(a) decompile, disassemble, or otherwise reverse engineer the Software or attempt to reconstruct or discover any source code, underlying ideas, algorithms, file formats or programming interfaces of the Software by any means whatsoever (except and only to the extent that applicable law prohibits or restricts reverse engineering restrictions, and then only with prior written notice to Spectra), (b) distribute, sell, sublicense, rent, lease or use the Software (or any portion thereof) for time sharing, hosting, service provider or like purposes, (c) remove any product identification, proprietary, copyright or other notices contained in the Software, (d) modify any part of the Software, create a derivative work of any part of the Software, or incorporate the Software into or with other software, except to the extent expressly authorized in writing by Spectra, or (e) publicly disseminate Software performance information or analysis (including, without limitation, benchmarks).

---

## **2. Ownership.**

Notwithstanding anything to the contrary contained herein, except for the limited license rights expressly provided herein, Spectra retains all rights, title and interest in and to the Software (including, without limitation, all patent, copyright, trademark, trade secret and other intellectual property rights) and all copies, modifications and derivative works thereof. Licensee acknowledges that it is obtaining only a limited license right to the Software and that irrespective of any use of the words "purchase", "sale" or like terms hereunder no ownership rights are being conveyed to Licensee under this MLA or otherwise.

## **3. Payment and Delivery.**

**3.1 Payment.** All payments, either to Spectra or an authorized reseller, are non-refundable (except as expressly set forth in this MLA). Unless otherwise specified on the applicable quote, all license fees, support and Professional Services fees, if any, are due within thirty (30) days of date of invoice. Licensee shall be responsible for all taxes, withholdings, duties and levies arising from the order (excluding taxes based on the net income of Spectra). Any late payments shall be subject to a service charge equal to 1.5% per month of the amount due or the maximum amount allowed by law, whichever is less.

**3.2 Delivery.** Immediately upon receipt of a purchase order from Licensee or on behalf of Licensee or from an authorized reseller on behalf of Licensee, Licensee will have the right to access the Software. Software will be delivered by electronic means unless otherwise specified on the applicable quote. Spectra will contact Licensee and request its server identification number(s) and provide Activation code(s).

## **4. Term of MLA.**

### **4.1 Term.**

(a)(i) If Licensee ordered a Software Subscription License, this MLA expires on the day the Term of the Software expires. However, the ability to retrieve/restore archived data will continue indefinitely.

(ii) If a Permanent Software License was ordered, the software license does not expire.

(b) Section 4.1(a) is subordinate to this section 4.1(b). Either party may terminate this MLA if the other party (a) fails to cure any material breach of this MLA within thirty (30) days after written notice of such breach, (b) ceases operation without a successor; or (c) seeks protection under any bankruptcy, receivership, trust deed, creditors arrangement, composition or comparable proceeding, or if any such proceeding is instituted against such party (and not dismissed within sixty (60) days thereafter).

Termination is not an exclusive remedy and the exercise by either party of any remedy under this MLA will be without prejudice to any other remedies it may have under this MLA, by law, or otherwise.

**4.2 Survival.** Sections 1.4 (License Restrictions), 2 (Ownership), 3 (Payment and Delivery), 4 (Term of MLA), 5.3 (Disclaimer), 8 (Limitation of Remedies and Damages), 10 (Confidential Information), 11 (General), and Licensee's right to Work Product and ownership of Licensee Content described in Section 7 shall survive any termination or expiration of this MLA.

## 5. Limited Warranty and Disclaimer.

**5.1 Limited Warranty.** Spectra warrants to Licensee that for a period of ninety (90) days from the effective date (the "Warranty Period"), the Software shall operate in substantial conformity with the Documentation. In addition, Spectra warrants that (i) it has the right to enter into and perform all obligations under this MLA, (ii) no agreement exists that restricts or conflicts with the performance of Spectra's rights and obligation hereunder, (ii) the technical information provided to Licensee is accurate and complete, and (iv) the Software is free from any third-party intellectual property infringement claims. Spectra does not warrant that Licensee's use of the Software will be uninterrupted or error-free, will not result in data loss, or that any security mechanisms implemented by the Software will not have inherent limitations. Spectra's sole liability (and Licensee's exclusive remedy) for any breach of this warranty shall be, in Spectra's sole discretion, to use commercially reasonable efforts to provide Licensee with an error-correction or work-around which corrects the reported non-conformity, to replace the non-conforming Software with conforming Software, or if Spectra determines such remedies to be impracticable within a reasonable period of time, to terminate the Software license and refund the license fee and support fee, if any, paid for the non-conforming Software. Spectra shall have no obligation with respect to a warranty claim unless notified of such claim within the Warranty Period.

**5.2 Exclusions.** The above warranty will not apply (a) if the Software is used with hardware or software not specified in the Documentation, (b) if any modifications are made to the Software by Licensee or any third party, (c) to defects in the Software due to accident, abuse or improper use by Licensee, or (d) to items provided on a no charge or evaluation basis.

**5.3 Disclaimer.** THIS SECTION 5 CONTAINS A LIMITED WARRANTY AND EXCEPT AS EXPRESSLY SET FORTH IN THIS SECTION 5 THE SOFTWARE AND ALL SERVICES ARE PROVIDED "AS IS". NEITHER SPECTRA NOR ANY OF ITS SUPPLIERS MAKES ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, STATUTORY OR OTHERWISE, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE. LICENSEE MAY HAVE OTHER STATUTORY RIGHTS. HOWEVER, TO THE FULL EXTENT PERMITTED BY LAW, THE DURATION OF STATUTORILY REQUIRED WARRANTIES, IF ANY, SHALL BE LIMITED TO THE LIMITED WARRANTY PERIOD.

## 6. Support.

Spectra will provide the support services identified in the quote ("Support"). Support services for the Subscription License will coincide with the license term.

## 7. Professional Services.

**7.1 Professional Services.** Professional Services may be ordered by Licensee pursuant to a quote describing the work to be performed, fees and any applicable milestones, dependencies and other technical specifications or related information. The parties acknowledge that the scope of the Professional Services provided hereunder consists solely of either or both of (a) assistance with Software installation, deployment, and usage or (b) development or delivery of additional related Spectra copyrighted software or code. Spectra shall retain all right, title and interest in and to any such work product, code or software and any derivative, enhancement or modification thereof created by Spectra (or its agents) ("Work Product").

**7.2 Licensee Content.** Licensee grants Spectra a limited right to use any Licensee materials provided to Spectra in connection with the Professional Services (the "Licensee Content") solely for the purpose of performing the Professional Services for Licensee. Licensee owns and will retain ownership (including all intellectual property rights) in the Licensee Content.

---

## **8. Limitation of Remedies and Damages.**

**8.1** NEITHER PARTY SHALL BE LIABLE FOR ANY LOSS OF USE, LOST DATA, FAILURE OF SECURITY MECHANISMS, INTERRUPTION OF BUSINESS, OR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES OF ANY KIND (INCLUDING LOST PROFITS), REGARDLESS OF THE FORM OF ACTION, WHETHER IN CONTRACT, TORT (INCLUDING NEGLIGENCE), STRICT LIABILITY OR OTHERWISE, EVEN IF INFORMED OF THE POSSIBILITY OF SUCH DAMAGES IN ADVANCE.

**8.2** NOTWITHSTANDING ANY OTHER PROVISION OF THIS MLA, SPECTRA'S AND AUTHORIZED RESELLER'S, IF ANY, ENTIRE LIABILITY TO LICENSEE SHALL NOT EXCEED THE AMOUNT ACTUALLY PAID BY LICENSEE UNDER THIS MLA.

**8.3** THIS SECTION 8 SHALL NOT APPLY WITH RESPECT TO ANY CLAIM ARISING UNDER THE SECTIONS TITLED "GRANT OF LICENSE," "LICENSE RESTRICTIONS" OR "CONFIDENTIAL INFORMATION."

## **9. Indemnification.**

(a) Spectra shall defend, indemnify and hold harmless Licensee from and against any claim of infringement of a patent, copyright, or trademark asserted against Licensee by a third party based upon Licensee's use of the Software in accordance with the terms of this MLA, provided that Spectra shall have received from Licensee (i) prompt written notice of such claim (but in any event notice in sufficient time for Spectra to respond without prejudice), (ii) the exclusive right to control and direct the investigation, defense, and settlement (if applicable) of such claim, and (iii) all reasonably necessary cooperation of Licensee.

(b) If Licensee's use of any of the Software is, or in Spectra's opinion is likely to be, enjoined due to the type of infringement specified above, or if required by settlement, Spectra may, in its sole discretion (i) substitute for the Software substantially functionally similar programs and documentation, (ii) procure for Licensee the right to continue using the Software, or if (i) and (ii) are commercially impracticable, (iii) terminate the MLA and refund to Licensee the license fee.

(c) The foregoing indemnification obligation of Spectra shall not apply if the Software is modified by any person other than Spectra, but solely to the extent the alleged infringement is caused by such modification, if the Software is combined with other non-Spectra products or process not authorized by Spectra, but solely to the extent the alleged infringement is caused by such combination, to any unauthorized use of the Software, to any unsupported release of the Software, or to any open source software or other third-party code contained within the Software. THIS SECTION 9 SETS FORTH SPECTRA'S AND RESELLER'S, IF ANY, SOLE LIABILITY AND LICENSEE'S SOLE AND EXCLUSIVE REMEDY WITH RESPECT TO ANY CLAIM OF INTELLECTUAL PROPERTY INFRINGEMENT.

---

## 10. Confidential Information.

Each party agrees that all code, inventions, know-how, business, technical and financial information it obtains ("Receiving Party") from the disclosing party ("Disclosing Party") constitute the confidential property of the Disclosing Party ("Confidential Information"), provided that it is identified as confidential at the time of disclosure or should be reasonably known by the Receiving Party to be Confidential Information due to the nature of the information disclosed and the circumstances surrounding the disclosure. Any software, documentation or technical information provided by Spectra (or its agents), performance information relating to the Software, and the terms of this MLA shall be deemed Confidential Information of Spectra without any marking or further designation. Except as expressly authorized herein, the Receiving Party will hold in confidence and not use or disclose any Confidential Information except as necessary to carry out the purpose of this MLA. The Receiving Party's nondisclosure obligation shall not apply to information which the Receiving Party can document (a) was rightfully in its possession or known to it prior to receipt of the Confidential Information, (b) is or has become public knowledge through no fault of the Receiving Party, (c) is rightfully obtained by the Receiving Party from a third party without breach of any confidentiality obligation, (d) is independently developed by employees of the Receiving Party who had no access to such information, or (e) is required to be disclosed pursuant to a regulation, law or court order (but only to the minimum extent required to comply with such regulation or order and with advance notice to the Disclosing Party). The Receiving Party acknowledges that disclosure of Confidential Information would cause substantial harm for which damages alone would not be a sufficient remedy, and therefore that upon any such disclosure by the Receiving Party the Disclosing Party shall be entitled to appropriate equitable relief in addition to whatever other remedies it might have at law.

## 11. General.

**11.1 Assignment.** This MLA will bind and inure to the benefit of each party's permitted successors and assigns. Neither party shall assign this MLA (or any part thereof) without the advance written consent of the other party, except that either party may assign this MLA in connection with a merger, reorganization, acquisition or other transfer of all or substantially all of such party's assets or voting securities. Any attempt to transfer or assign this MLA except as expressly authorized under this section 11.1 is null and void.

**11.2 Severability.** If any provision of this MLA shall be adjudged by any court of competent jurisdiction to be unenforceable or invalid, that provision shall be limited to the minimum extent necessary so that this MLA shall otherwise remain in effect.

**11.3 Governing Law; Jurisdiction and Venue.** This MLA shall be governed by the laws of the State of Colorado and the United States without regard to conflicts of laws provisions thereof, and without regard to the United Nations Convention on the International Sale of Goods. Except where statutory laws prohibit Licensee from entering into arbitration or choice of laws, any dispute or claim relating in any way to Licensee's use of the Software, or of a copyright issue, or to any associated support services, will be resolved by binding arbitration in Denver, Colorado. The prevailing party in any action to enforce this MLA will be entitled to recover its attorneys' fees and costs in connection with such action.

**11.4 Amendments; Waivers.** No supplement, modification, or amendment of this MLA shall be binding, unless executed in writing by an authorized representative of both parties. No waiver will be implied from conduct or failure to enforce or exercise rights under this MLA. No provision of any purchase order or other business form employed by Licensee will supersede the terms and conditions of this MLA, and any such document relating to this MLA shall be for administrative purposes only and shall have no legal effect.

---

**11.5 Force Majeure.** Neither party shall be liable to the other for any delay or failure to perform any obligation under this MLA (except for a failure to pay fees) if the delay or failure is due to events which are beyond the reasonable control of such party, including but not limited to any strike, blockade, war, act of terrorism, riot, natural disaster, failure or diminishment of power or of telecommunications or data networks or services, or refusal of approval or a license by a government agency.

**11.6 Export Compliance.** Licensee acknowledges that the Software is subject to export restrictions by the United States government and import restrictions by certain foreign governments. Licensee shall not and shall not allow any third-party to remove or export from the United States or allow the export or re-export of any part of the Software or any direct product thereof (a) into (or to a national or resident of) any embargoed or terrorist-supporting country, (b) to anyone on the U.S. Commerce Department's Table of Denial Orders or U.S. Treasury Department's list of Specially Designated Nationals, (c) to any country to which such export or re-export is restricted or prohibited, or as to which the United States government or any agency thereof requires an export license or other governmental approval at the time of export or re-export without first obtaining such license or approval, or (d) otherwise in violation of any export or import restrictions, laws or regulations of any United States or foreign agency or authority. Licensee agrees to the foregoing and warrants that it is not located in, under the control of, or a national or resident of any such prohibited country or on any such prohibited party list. The Software is further restricted from being used for the design or development of nuclear, chemical, or biological weapons or missile technology, or for terrorist activity, without the prior permission of the United States government.

**11.7 Third-Party Code.** The Software may contain or be provided with components subject to the terms and conditions of third party "open source" software licenses ("Open Source Software"). Open Source Software may be identified in the Documentation, or Spectra shall provide a list of the Open Source Software for a particular version of the Software to Licensee upon Licensee's written request. To the extent required by the license that accompanies the Open Source Software, the terms of such license will apply in lieu of the terms of this MLA with respect to such Open Source Software.

**11.8 Entire Agreement.** This MLA is the complete and exclusive statement of the mutual understanding of the parties and supersedes and cancels all previous written and oral agreements and communications relating to the subject matter contained herein.

## **Amazon Web Services**

If Licensee has licensed Software for use in conjunction with Amazon Web Services, such web services will be provided by Amazon in accordance with its standard terms and conditions. SPECTRA MAKES NO WARRANTY REGARDING AMAZON SERVICES AND SUGGESTS THE USE OF AMAZON'S CONTINUOUS DATA BACK UP SERVICES.

---

# Table of Contents

Contacting Spectra Logic .....	3
What's New .....	16
Chapter 1 - Spectra Rio MediaEngine Archive Solution Overview .....	17
Overview .....	18
Terminology Definitions .....	21
Requirements .....	22
Spectra Logic Requirements .....	22
Operating System Requirements .....	22
Server Requirements .....	22
Version Compatibility .....	22
Supported Browsers .....	22
Best Practices .....	23
Host System Memory Usage .....	23
Spectra Rio MediaEngine User Interface Overview .....	24
Taskbar .....	24
Toolbar .....	25
Chapter 2 - Install the Spectra Rio MediaEngine Application .....	26
Install The Rio MediaEngine Application for Windows .....	27
Install the PostgreSQL Service .....	27
Install the Rio MediaEngine Software .....	29
Configure the Local System User Account .....	29
Configure a Domain Administrator or Backup Operator .....	30
Configure a Local Group Administrator or Backup Operator .....	30
Install the Rio MediaEngine Application for Linux .....	31
Install the PostgreSQL Service .....	31
Configure the PostgreSQL Service .....	32
Install the Rio MediaEngine Software .....	32
Chapter 3 - Configure the Spectra Rio MediaEngine Application .....	33
Configuration Process Overview .....	34
Log in to the Spectra Rio MediaEngine Application .....	35
Create a Device .....	39
Create a BlackPearl Device .....	40
Create a Diva Device .....	42

---

Create a FlashNet Device .....	43
Create a Spectra Vail Device .....	45
Create a S3 Device .....	47
Create a Time Based Partial File Restore Device .....	48
Create a Namespace .....	50
Create Lifecycles and Policies .....	66
Create a Lifecycle .....	66
Create a Policy .....	67
Configure the Lifecycle Cache .....	69
Create a Source Storage .....	71
Create an FTP Source Storage .....	72
Create an S3 Source Storage .....	74
Create a NAS Source Storage .....	76
Create a Linux Source Storage .....	77
Test the Installation .....	79
Test Setup .....	79
Test with a Small Text File .....	81
Test Performance .....	84
<b>Chapter 4 - Archive and Restore Using the Spectra Rio MediaEngine Application .....</b>	<b>95</b>
Archive Files .....	96
Browse and Restore Objects .....	98
Restore a Single Object .....	100
Restore Multiple Objects .....	101
Restore All Objects .....	102
View Object Details .....	103
View Object Metadata .....	105
Search and Restore Objects .....	106
Search for Objects .....	106
Restore Objects .....	108
Download Object Report .....	109
Manage Jobs .....	110
View Job Status .....	110
View Active Job Transfer Information .....	110
Change Job Priority .....	111
Cancel an Active Job .....	112

---

---

Restart a Job .....	113
View Detailed Job Information .....	114
View Job Groups .....	115
View All Jobs in a Job Group .....	116
Chapter 5 - Manage the Spectra Rio MediaEngine Application .....	117
Manage Users .....	118
Create a New User .....	119
Edit a User .....	120
Manage User Groups .....	121
Change User Password .....	121
Delete a User .....	121
Manage Authenticators .....	122
Create a New Authenticator .....	122
Edit an Authenticator .....	123
Delete an Authenticator .....	123
Manage Groups .....	124
New Group .....	125
View Group Details .....	126
Edit Group .....	127
Delete Group .....	127
Manage Namespaces .....	128
Edit Namespace Target Storage .....	128
View Namespace Target Storage Information .....	129
Delete a Namespace Target Storage .....	130
Delete a Namespace .....	130
Manage Clusters, Devices, and Source Storage .....	131
Delete a Cluster Member .....	131
Delete a Device .....	132
Delete Source Storage .....	132
Log Out of Existing Session .....	133
Chapter 6 - Application Information and Reports .....	134
History .....	135
Logs .....	136
Create a Log Set .....	136
Download a Log Set .....	136

---

---

Delete a Log Set .....	136
Set Log Level .....	136
Reports .....	137
Object Search Reports .....	137
Live Data Reports .....	138
Settings Reports .....	139
Messages .....	140
System Screen .....	141
<b>Chapter 6 - Rio MediaEngine Database Operations and Software Update</b> .....	<b>142</b>
Database Backup .....	143
Automatic Database Backup Schedule .....	143
Manual Database Backup .....	144
Change Database Password .....	145
Database Restore .....	146
Restore Database to an Existing 4.x or 5.x Installation .....	146
Restore Database to an Existing Rio 3.x Installation .....	146
Database Transfer .....	147
Transfer Rio 4.x/5.x Database to a Rio 4.x/5.x Installation .....	147
Transfer Rio 3.5 Database to Rio 4.x/5.x Installation .....	148
Updating the Rio MediaEngine Application .....	149
Updating from Version 4.x or Later .....	149
Updating from Version 3.5 .....	149
Updating from Version 3.4 or Earlier .....	152
<b>Chapter 7 - Use and Monitor a BlackPearl System in the Rio MediaEngine Interface</b> .....	<b>153</b>
Access the BlackPearl Dashboard .....	154
View the Status of the BlackPearl System .....	155
View System Overview .....	155
View Notifications .....	156
View Jobs .....	157
View Buckets .....	158
View Pools .....	159
View Tape Partitions - Main View .....	160
View Tape Partitions - Tape State View .....	161
View Tape Drives .....	162

---

---

View Tape Management .....	163
Dashboard Actions .....	164
Export a Tape Cartridge .....	164
Online a Tape Cartridge .....	164
Verify a Tape Cartridge .....	165
Change Job Priority .....	165
Start a Storage Pool Verification .....	165
Create a Bucket .....	166
Put a Tape Partition into Standby .....	166
Offline a Tape Drive .....	167
Chapter 8 - Technical Support .....	168
Accessing the Technical Support Portal .....	169
Create an Account .....	169
Log Into the Portal .....	170
Opening a Support Ticket .....	171
Search for Help Online .....	171
Submit an Incident Online .....	175
Submit an Incident by Phone .....	177

# RELATED PUBLICATIONS

The following documents related to the Spectra Rio MediaEngine application are available on the Support Portal website at [support.spectralogic.com](https://support.spectralogic.com).

- The [\*Spectra Rio MediaEngine Release Notes\*](#) provide the most up-to-date information about the Spectra Rio MediaEngine application, including information about the latest software releases and documentation updates.
- The [\*Spectra BlackPearl Object Gateway User Guide\*](#) provides detailed information about configuring, using, and maintaining your Spectra BlackPearl system.
- The [\*Spectra BlackPearl Release Notes and Documentation Updates\*](#) provide the most up-to-date information about the BlackPearl system, including information about the latest software releases and documentation updates.
- The [\*Rio MediaEngine Partial File Restore Plugin Installation and User Guide\*](#) provides information on installing, configuring, and using the PFR plugin.

To view the Rio MediaEngine API documentation after the application is installed:

- If you are on the server where the Rio MediaEngine application is installed:
  - In the Rio MediaEngine user interface, click the **Settings** icon (a gear), and select **System**, then click **API Docs** (see [Application Information and Reports on page 134](#)).
  - Using a supported web browser, enter <https://localhost:5050/api/viewer/index.html>.
- If you are on a host on the same network as the Rio MediaEngine server, using a supported web browser, enter the IP address for the server instead of 'localhost' (for example <https://xxx.xxx.xxx.xxx:5050/api/viewer/index.html>).

# TYPOGRAPHICAL CONVENTIONS

This document uses the following conventions to highlight important information:



## IMPORTANT

Read text marked by the "Important" icon for information that helps you complete a procedure or avoid extra steps.



## CAUTION

Read text marked by the "Caution" icon for information you must know to avoid damaging the hardware or losing data.

**Note:** Read text marked with "Note" for additional information or suggestions about the current topic.

---

# WHAT'S NEW

Here is what's new in Rio MediaEngine 5.1:

## Naming Convention Updates

Added new names to multiple features of the Rio MediaEngine application. Brokers are now called Namespaces. Buckets are now called Storage Targets. Storage Endpoints are now called Source Storages.

## User Groups

The Rio MediaEngine application now supports user groups. User groups allow you to assign and manage access and permissions of multiple users at once.

## Internal Checksum

The Rio MediaEngine application now generates an internal checksum value associated with the file. This new checksum value validates against any file edits made after an archive action during a restore action.

## New Authenticators Page

Added a new Authenticators page to the user interface. From the new Authenticator page, users may configure LDAP settings and permissions for users from your active directory.

# CHAPTER 1 - SPECTRA RIO MEDIAENGINE ARCHIVE SOLUTION OVERVIEW

This guide is for installers, administrators, and users of the Spectra® Rio MediaEngine® application in conjunction with a production and archive structure.


---

<b>Overview</b>	<b>18</b>
<b>Terminology Definitions</b>	<b>21</b>
<b>Requirements</b>	<b>22</b>
Spectra Logic Requirements	22
Operating System Requirements	22
Server Requirements	22
Version Compatibility	22
Supported Browsers	22
Best Practices	23
<b>Host System Memory Usage</b>	<b>23</b>
<b>Spectra Rio MediaEngine User Interface Overview</b>	<b>24</b>
Taskbar	24
Toolbar	25

# OVERVIEW

At its core, Rio MediaEngine is a sophisticated data mover augmented with features that aid in creating, monitoring, managing, and reporting on jobs to store and retrieve data from modern object storage systems. With the adoption of modern object storage systems, legacy middle-ware is no longer required but many of those sub functions are still required. Rio MediaEngine bridges the gap between file based and object based systems and streamlines the overall management and migration of data.

At the heart of the modern storage system provided by Spectra Logic is the BlackPearl™ Object Gateway, an appliance designed to provide a simple, RESTful interface to a variety of tier 2 storage targets.

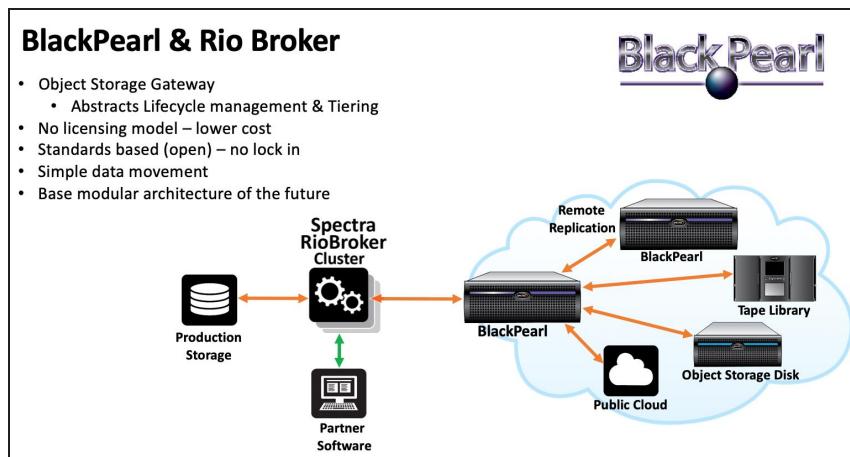


**Figure 1** Rio MediaEngine with BlackPearl workflow.

While direct integration with a BlackPearl system is possible, most software clients find the need for a data mover “helper”. Rio MediaEngine was developed to meet this need.

## Rio MediaEngine provides:

- Job based data movement in or out of Object Storage.
- “Endpoints”, or sources, can be NAS, proprietary storage enabled by an installed client, any CIFS or NFS target, FTP servers, or Amazon compatible S3 targets, and are generally referenced by predefining the endpoint in the user interface or using a URI.
- “Devices”, or targets, which include BlackPearl systems or Spectra Vail nodes for both archive and restore, as well as a variety of other legacy middle-ware options for read-only.
- Job creation, monitoring, and control via the user interface.
- Global search across targets with built in restore.

- An optional Partial-File Recovery (PFR) plug-in enabling indexing as well as PFR restore.
- Speed and High Availability scaling by clustering Rio MediaEngine instances.
- Object browse via the user interface.
- Abstraction of storage targets with a simple immutable interface.
- Off-load of client software from data movement responsibilities.

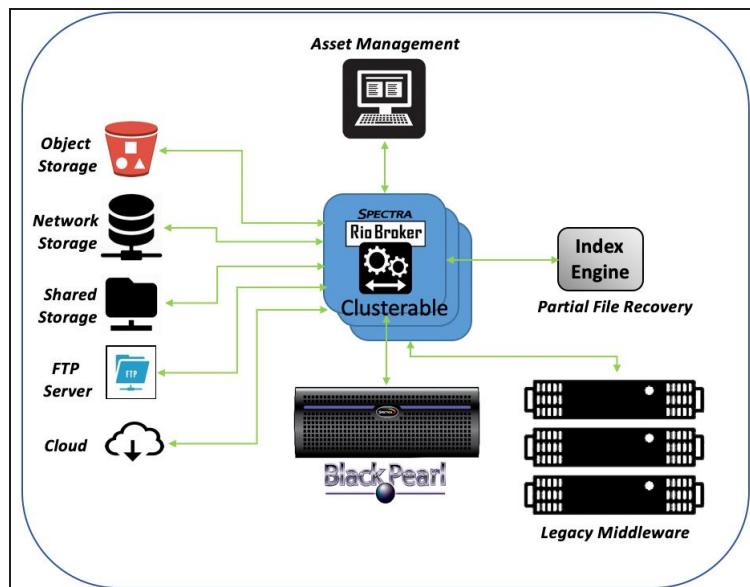

**Figure 2** Rio MediaEngine with third party software workflow.

Rio MediaEngine is typically set up either as a VM or on a bare metal stand-alone server. A Rio MediaEngine system is typically set up as either a single instance or a cluster with an odd number of members. Rio MediaEngine instances must be added in pairs to achieve an odd number of cluster instances. The master node is the primary instance to which the clients connect, other Rio MediaEngine nodes act as cluster members which are assigned archive or restore jobs by the master node. The Rio MediaEngine database is shared across the cluster members for protection in the event of the loss of a cluster member. Each cluster member must have the same permissions and configured with the correct mount points so that any cluster member can move data in and out of any endpoint or target.

Rio MediaEngine has its own database that allows addition of any metadata tags either at the point of ingest or at any time thereafter that can be directly accessed by the client, through the user interface, or the RESTful interface.

## Benefits include:

- Data movement does not require third party software.
- Ability to move individual files to a BlackPearl system.
- Provides a layer of abstraction over the BlackPearl interface allowing for much easier development.
- Stable API – Changes to the BlackPearl API do not affect the Spectra Rio MediaEngine API.
- Scalable and clusterable.
- Provides a global search across all namespaces and direct restore.
- Single name space for legacy and new systems.
- Provides system monitoring, auditing, PFR, and user metadata for objects.
- Restore archived objects to endpoints outside of legacy data flows in case of emergency, or to support outside workflows and auditing.

# TERMINOLOGY DEFINITIONS

## Cluster

A set of Spectra Rio MediaEngine application installations that reference each other in order to form a set of servers that scale out for increased data movement with shared databases. The master node assigns jobs to secondary nodes in the cluster. Secondary nodes fail over to each other in the event of a failure.

Using a Rio MediaEngine cluster increases performance. A single Rio MediaEngine node processes ten tasks per job simultaneously. Each additional cluster increases this by ten per cluster.

## Device

Any archive target that the Spectra Rio MediaEngine application can use to archive or restore objects, including a BlackPearl system, Spectra Vail sphere, Diva application, FlashNet application, or a Time Based Partial File Restore device. Each device is individually set up as a generic target for the purposes of physical and logical connection.

## Namespace

A logical construct that defines a specific archive environment which can include multiple Rio Media buckets on a device target. Any number of namespaces can be defined within the Rio MediaEngine application so as to allow multi-bucket support for archives.

## Rio Media Engine Target Storage

A logical interface to a device. Each target storage includes the API protocol to interface with its respective device as well as ancillary translation protocols if the stored objects have to be uniquely manipulated for that particular archive system.

# REQUIREMENTS

The following sections describe the requirements for using the Spectra Rio MediaEngine application.

## Spectra Logic Requirements

A BlackPearl Object Gateway must be configured and available for network communications with the Spectra Rio MediaEngine application and a Spectra Rio MediaEngine client. See the [\*Spectra BlackPearl Object Gateway User Guide\*](#).

## Operating System Requirements

The Spectra Rio MediaEngine application is available for 64-bit Microsoft® Windows® operating systems. The Spectra Rio MediaEngine application was tested on:

- Windows Server 2019 and Windows Server 2022

The Spectra Rio MediaEngine application is also available for RHEL 8.x and Rocky8 Linux operating systems.

## Server Requirements

The host server must meet the following requirements to run the Spectra Rio MediaEngine application:

- Six CPU cores each with a minimum speed of 1.3 GHz.
- 64 GB RAM
- 500 GB SSD disk space
- 10 Gb/s network connection to both the BlackPearl system data port(s) and production storage

## Version Compatibility

The Spectra Rio MediaEngine application is compatible with BlackPearl software versions 4.1.x and 5.x.

## Supported Browsers

Spectra Logic only supports using Google® Chrome™ version 75 or later, on Windows® and macOS® to access the user interface.

**Note:** Elements of the Rio MediaEngine user interface may fail to display if the browser window is compressed horizontally.

# Best Practices

## Performance

Archive and restore performance may be improved by maximizing the transfer rates with the following guidelines:

- Include as many files in a job as possible. This allows the Spectra Rio MediaEngine application to efficiently group the files during the transfer to or from a BlackPearl system.  
**Note:** The maximum number of files per job is 10,000. Rio MediaEngine 2.1 and earlier are limited to 1,000 files per job.
- Send transfer requests in parallel. The Spectra Rio MediaEngine application can process multiple archive and restore commands in parallel. Clients should send the archive and restore requests as soon as possible and in parallel to achieve maximum transfer performance.

## Multi-Node Cluster

If you plan to create a multi-node cluster, it is very important that the IP address of the master node does not change. Setting a static IP address for the master cluster node is highly recommended.

## Archive and Restore of Filenames containing Control Characters

If your Media Asset Management (MAM) environment uses control characters in filenames, when the files are archived using the Rio MediaEngine application, the control characters are ignored. Spectra Logic recommends restoring the files using the Rio MediaEngine user interface and then archiving the restored files again to update the MAM database with the new filenames.

## Rio MediaEngine with AntiVirus Software

The use of antivirus or scanner software including Cloudstrike™, AVAST®, Norton™, and other antivirus software greatly impacts performance and is not supported for use with the Rio MediaEngine application. The performance impact of such software is not a valid reason for support escalation with Spectra Logic Technical Support. A regular scheduled scan of the Rio MediaEngine server is recommended during off hours. Real time scanning is not supported.

# HOST SYSTEM MEMORY USAGE

The Spectra Rio MediaEngine application uses PostgreSQL™ as its database infrastructure.

# SPECTRA RIO MEDIAENGINE USER INTERFACE OVERVIEW

The user interface provides browser-based configuration, management, and monitoring of the Spectra Rio MediaEngine application. The following sections describe the common features that appear in all screens in the user interface.



## IMPORTANT

Do not use the refresh or back buttons on a web browser to navigate the user interface. Any manual changes, such as the number of jobs displayed are lost if the refresh or back buttons are used.

**Figure 3** The Job Status screen of the Spectra Rio MediaEngine application user interface.

## Taskbar

The taskbar displays along the left edge of each screen. Use the taskbar to access the Job Status, Browse, and Reports screens.

The following table provides an overview of the selections in the taskbar.

Taskbar	Description
<b>Job Status</b>	The <b>Job Status</b> navigation link takes you to a screen displaying the status of active, completed, canceled, and failed jobs. See <a href="#">Manage the Spectra Rio MediaEngine Application</a> on page 117 for more information.
<b>Archive</b>	The <b>Archive</b> navigation link takes you to a screen that allows you to search endpoints and select files and folders to archive. See <a href="#">Manage the Spectra Rio MediaEngine Application</a> for more information.
<b>Restore</b>	The <b>Restore</b> navigation link takes you to a screen that allows you to search for files based on the file's namespace, prefix, metadata, and archive start and stop dates. It also allows you to restore files found during a search. See <a href="#">Manage the Spectra Rio MediaEngine Application</a> on page 117 for more information.

Taskbar	Description
<b>History</b>	The <b>History</b> navigation link takes you to the history screen where you can view the number of jobs, files, and bytes processed by the Rio MediaEngine application, as well as data for a specified namespace or date range. See <a href="#">Application Information and Reports on page 134</a> for more information.
<b>Reports</b>	The <b>Reports</b> navigation link takes you to a screen that allows you to view all currently configured settings for the Rio MediaEngine application, as well as generating object search reports. See <a href="#">Application Information and Reports on page 134</a> .

## Toolbar

The toolbar displays in the upper right corner of each screen. The following table provides an overview of the selections in the toolbar.

Icon	Meaning	Description
	<b>Search</b>	Takes you to the Search screen used to search configured namespaces for files to restore.
	<b>Settings</b>	Provides access to the Settings menu which allows you to configure or access the following: <ul style="list-style-type: none"> <li>• System</li> <li>• Cluster</li> <li>• Devices</li> <li>• Namespaces</li> <li>• Source Storage</li> <li>• Lifecycle Rules</li> <li>• Database Backup</li> <li>• Authenticators</li> <li>• Users</li> <li>• Groups</li> <li>• Logs</li> <li>• BlackPearl Dashboard</li> </ul>
	<b>Help</b>	Takes you to the help system.
	<b>Messages</b>	Takes you to the Messages screen. When there are unread messages on the system, the number of messages displays next to this icon.
	<b>User</b>	Provides access to the Logout function.

# CHAPTER 2 - INSTALL THE SPECTRA RIO MEDIAENGINE APPLICATION

This chapter describes how to install the Spectra Rio MediaEngine application.

---

<b>Install The Rio MediaEngine Application for Windows</b>	<b>27</b>
Install the PostgreSQL Service	27
Install the Rio MediaEngine Software	29
Configure the Local System User Account	29
Configure a Domain Administrator or Backup Operator	30
Configure a Local Group Administrator or Backup Operator	30
<b>Install the Rio MediaEngine Application for Linux</b>	<b>31</b>
Install the PostgreSQL Service	31
Configure the PostgreSQL Service	32
Install the Rio MediaEngine Software	32

# INSTALL THE RIO MEDIAENGINE APPLICATION FOR WINDOWS

Use the instructions in this section to install the Rio MediaEngine application for the first time in a Microsoft Windows operating system environment.

**Note:** To upgrade the application, see the [\*Rio MediaEngine Application Release Notes\*](#).

## Install the PostgreSQL Service

Use the following instructions to download and install the PostgreSQL service. PostgreSQL is a standalone service that the Rio MediaEngine application utilizes. The Rio MediaEngine application requires Postgres version 16.0 or higher.

**Note:** The PostgreSQL service can be on the same server as the Rio MediaEngine master node or can be installed on a different server. You may want to install the service on a different server for one of the following reasons:

- A PostgreSQL service is already running on the local network, and you want to add the Rio MediaEngine database to the existing service.
- The server does not have enough free disk space.
- You expect performance issues with the PostgreSQL service and Rio MediaEngine application on the same server.
- You want your PostgreSQL service and database on a Linux server.

1. Download the PostgreSQL installer from <https://www.enterprisedb.com/downloads/postgres-postgresql-downloads>.
2. Launch the PostgreSQL service installer.
3. On the Select Components screen of the install wizard, select the **PostgreSQL Server**, **pgAdmin 4**, and **Command Line Tools** components.
4. Finish the PostgreSQL installation wizard.

## Allow Remote Connections

If you install the PostgreSQL service on a different server than the Rio MediaEngine master node or if you intend to configure multiple Rio MediaEngine data nodes, you must configure the PostgreSQL service to allow remote connections. If you installed PostgreSQL on the same server as the Rio MediaEngine master node, skip to [\*\*Add PostgreSQL to the Windows Execution PATH\*\*](#) on the next page.

Use the steps below to configure remote connections, otherwise continue with [Add PostgreSQL to the Windows Execution PATH](#) below.

1. As a Windows administrator, edit the file found at  
C:\Program Files\PostgreSQL\16\data\pg\_hba.conf

**Note:** You may need to change the number in red to match the version of PostgreSQL you have installed.

2. Add the following line to the end of the file:  
host all all 0.0.0.0/0 md5
3. Save the file and exit the editor.

## Add PostgreSQL to the Windows Execution PATH

After installing the PostgreSQL service, you need to add the PostgreSQL bin folder to the system PATH. Follow the steps below:

1. Search for and open the **Edit the systems environment variables** option in Windows.
2. On the Advanced tab, click **Environmental Variables...**
3. In the System Variables window, select the Path line and click **Edit**.
4. In the Edit environment variable window, click **New** then click **Browse**.
5. Navigate to the PostgreSQL install location and select the bin folder.
6. Click **OK**.
7. Use the **Move Up** button to raise the PostgreSQL bin entry to the top of the list.
8. Click **OK** to close the Environmental Variables window.
9. Click **OK** to save and close all remaining Windows Setting dialogue windows.

## Verify the PostgreSQL Service

Spectra Logic recommends verifying your PostgreSQL connectivity before proceeding. Use the steps below:

1. Open a Windows Command Prompt.
2. Enter the following command. You may need to change the values for host and port based on the values used in your installation.  
psql --host=localhost --port=5432 --username=postgres
3. Enter the administrator role password created during the PostgreSQL installation. If you can log in successfully, then connectivity is verified.

## Install the Rio MediaEngine Software

Use the following instructions to download and install the Spectra Rio MediaEngine software for a new installation of the Rio MediaEngine application.

1. Contact Spectra Logic Professional Services or Technical Support for access to the Rio MediaEngine installer (see [Contacting Spectra Logic on page 3](#)).
2. Start the installation by double clicking `SpectraRioMediaEngineSetup-x.x.x.msi`, where x.x.x indicates the version of the software.
3. Follow the on-screen instructions to install the application.

**Note:** If prompted by the installer, reboot your Windows system.

## Configure the Local System User Account

Unless you specified a user account for the Spectra Rio MediaEngine service during installation, the Rio MediaEngine service is run by the Local System User. For an Avid PAM installation accessing Avid Nexis, no changes to permissions are required.

However, if your file storage uses a Server Message Block (SMB) protocol, such as CIFS, then the Local System User often does not have access to all storage locations or permissions to read from and write to the storage locations. Use the table below to select the privileges to configure for the user running the Rio MediaEngine service.

**Note:** Consult an IT administrator to configure the Rio MediaEngine service user.

Role	Privileges	Configuration Instructions
<b>Recommended</b> A domain administrator	Able to migrate / restore any files and folders on a computer in the domain, with or without a two-way trust relationship.	<a href="#">Install the Spectra Rio MediaEngine Application on page 26</a> .
A local group administrator	Able to migrate / restore files and folders on the local computer to which the local group applies. This must be configured on the Rio MediaEngine server and each source storage location and target storage location.	<a href="#">Install the Spectra Rio MediaEngine Application on page 26</a> .
<b>Not Recommended</b> A custom owner of files and folders that is not an administrator	Custom privileges on the Rio MediaEngine server, source storage locations, and target storage locations.	Contact Spectra Logic Professional Services to discuss requirements and possible issues. See <a href="#">Contacting Spectra Logic on page 3</a> .

## Configure a Domain Administrator or Backup Operator

1. Create a user account for running the Rio MediaEngine service.

**Note:** Spectra Logic recommends that you select the **User cannot change password** and **Password never expires** check boxes when creating the new user.

2. Add the new user account as a member of the Domain Administrators or Backup Operators group.
3. Launch the Services app, and configure the "Spectra RioBroker" service to run under the new user.

## Configure a Local Group Administrator or Backup Operator

1. Create a User Account for running the Rio MediaEngine Service.

**Note:** Spectra Logic recommends that you select the **User cannot change password** and **Password never expires** check boxes when creating the new user.

2. Make the new user account a local Administrator or Backup Operator on the Rio MediaEngine server, all source locations, and all target storage locations.
3. Launch the Services app, and configure the "Spectra RioBroker" service to run under the new user.

# INSTALL THE RIO MEDIAENGINE APPLICATION FOR LINUX

Use the instructions in this section to install the Rio MediaEngine application for the first time in a Linux operating system environment.

**Note:** The instructions below are written for systems running RHEL 9. If you are using a different version of Linux software, the instructions may not match the commands used by your system. Contact Spectra Logic Technical Support for assistance.

## Install the PostgreSQL Service

Use the following instructions to download and install the PostgreSQL service. PostgreSQL is a standalone service that the Rio MediaEngine application utilizes. The Rio MediaEngine application requires Postgres version 16.0 or higher.

**Note:** The PostgreSQL service can be on the same server as the Rio MediaEngine master node or can be installed on a different server. You may want to install the service on a different server for one of the following reasons:

- A PostgreSQL service is already running on the local network, and you want to add the Rio MediaEngine database to the existing service.
- The server does not have enough free disk space.
- You expect performance issues with the PostgreSQL service and Rio MediaEngine application on the same server.

1. For your Linux software and architecture, download version 16 or later of the PostgreSQL service from <https://www.postgresql.org/download/linux/redhat/> .
2. Install the PostgreSQL repository RPM:

```
sudo dnf install -y  
https://download.postgresql.org/pub/repos/yum/reporpms/EL-9-x86_64/pgdg-redhat-repo-latest.noarch.rpm
```

3. Install the PostgreSQL service:

```
sudo dnf install -y postgresql16-server
```

**Note:** You may need to change the number in red to match the version of PostgreSQL you plan to install.

## Configure the PostgreSQL Service

1. Initialize the database:

```
sudo postgresql-setup --initdb
```

2. Start the database:

```
sudo systemctl start postgresql.service
```

3. Create an administrative user named `root` with a password of `root` in PostgreSQL:

```
CREATE ROLE root with superuser;  
ALTER ROLE root with PASSWORD 'root' ;  
ALTER ROLE root with LOGIN;  
\du  
exit
```

4. Enable the PostgreSQL to launch after a host server restart:

```
sudo systemctl enable postgresql.service
```

5. Create a user and set a desired password in PostgreSQL:

```
sudo -i -u <username> psql  
\password <password>
```

## Install the Rio MediaEngine Software

1. Contact Spectra Logic Professional Services or Technical Support for access to the Rio MediaEngine RPM installer (see [Contacting Spectra Logic on page 3](#)).
2. Download the Rio MediaEngine RPM installer to the directory `/tmp` on the host server.
3. If necessary, switch to the OS root user (`su root`).
4. Run the installer by entering:

```
sudo dnf install /tmp/rio-broker.xxxxxx-release-1.x86_64.rpm  
where xxxxx refers to the version you downloaded in Step 2 on page 32.
```

**Note:** For this command "sudo" is still required even if you are logged in as the root user.

5. Start the RioBroker service:

```
systemctl start RioBroker.service
```

6. Verify that the RioBroker service is running:

```
systemctl status RioBroker.service
```

7. Configure the RioBroker service to launch after a host server restart:

```
systemctl enable RioBroker.service
```

# CHAPTER 3 - CONFIGURE THE SPECTRA RIO MEDIAENGINE APPLICATION

This chapter describes how to configure and test the Spectra Rio MediaEngine application.

<b>Configuration Process Overview</b>	<b>34</b>
<b>Log in to the Spectra Rio MediaEngine Application</b>	<b>35</b>
<b>Create a Device</b>	<b>39</b>
Create a BlackPearl Device	40
Create a Diva Device	42
Create a FlashNet Device	43
Create a Spectra Vail Device	45
Create a S3 Device	47
Create a Time Based Partial File Restore Device	48
<b>Create a Namespace</b>	<b>50</b>
<b>Create Lifecycles and Policies</b>	<b>66</b>
Create a Lifecycle	66
Create a Policy	67
Configure the Lifecycle Cache	69
<b>Create a Source Storage</b>	<b>71</b>
Create an FTP Source Storage	72
Create an S3 Source Storage	74
Create a NAS Source Storage	76
Create a Linux Source Storage	77
<b>Test the Installation</b>	<b>79</b>
Test Setup	79
Test with a Small Text File	81
Test Performance	84

# CONFIGURATION PROCESS OVERVIEW

At a high-level, the Rio MediaEngine uses Namespaces to migrate and persist data. Before configuring a namespace, the general process of configuring the Rio MediaEngine is as follows:

1. First create storage containers on one or more systems where you plan to persist data. This is done using your application's software. The Rio MediaEngine supports using multiple and mixed types of target systems.
2. Next you use the Rio MediaEngine to create Devices that target the systems that contain the storage containers. See [Configure the Spectra Rio MediaEngine Application on the previous page](#) for instructions.
3. Then you create Namespaces, and assign target storage to the Namespaces. Multiple target storages can be assigned to a Namespace and each target storage uses a storage container on a configured Device. See [Create a Namespace on page 50](#) for instructions.
4. After that you configure Policies that control where and for how long data is persisted. See [Create Lifecycles and Policies on page 66](#) for instructions.
5. Lastly you create Source Storage, which acts as data sources for the Rio MediaEngine to ingest data. See [Configure the Spectra Rio MediaEngine Application on the previous page](#) for instructions.

Once these steps are completed, you can begin archiving data.

# LOG IN TO THE SPECTRA RIO MEDIAENGINE APPLICATION

1. Using a supported web browser (see [Install the Spectra Rio MediaEngine Application on page 26](#)), do one of the following:
  - If you are on the server, enter `https://localhost:5050` and press Enter.
  - If you are on a host on the same network as the server, enter the IP address for the Rio MediaEngine server instead of `localhost` (for example `https://xxx.xxx.xxx.xxx:5050`).

**Notes:** • The application requires a secure connection.

- If necessary, resolve the security warning for the application. If desired, you can use a custom SSL key and certificate file using API commands.
- The Spectra Rio MediaEngine user interface has a 60 minute session time out setting.
- Elements of the Rio MediaEngine user interface may fail to display if the browser window is compressed horizontally.

2. The first time launching the application, the Cluster Welcome screen displays. Otherwise, the login page displays (see [Figure 7 on page 37](#)).



**Figure 4** The Cluster Welcome screen.

3. Create a new cluster, or join an existing cluster.

A cluster is a logical designation for a set of Spectra Rio MediaEngine installations that reference each other in order to form a set of servers that scale for increased data movement using shared databases. The master node assigns jobs to secondary nodes in the cluster. Secondary nodes fail over to each other in the event of a failure.

**Note:** When creating a multi-cluster configuration, it is very important that the IP address of the master node does not change.

**CAUTION**

If the IP address of the master node in the cluster changes, the cluster dissolves and all data transfers stop. No data loss occurs, but as you can only access data using the master node, data is unavailable. The cluster cannot be restored and must be manually recreated. Contract Spectra Logic Technical Support for assistance (see [Contacting Spectra Logic on page 3](#)).

**Create Cluster:**

- Click **New**. The Create Cluster dialog box displays.

Cluster Name  
rio-cluster

PostgreSQL Host  
localhost

PostgreSQL Port  
5432

PostgreSQL Admin Login  
postgres

Admin Password  Confirm

PostgreSQL Database Name  
rio\_db

PostgreSQL Rio DBO User  
rio\_dbo

Rio DBO Password  Confirm

PostgreSQL Rio Query User  
rio\_login

Rio Query Password  Confirm

Hide Advanced (use defaults)

Migrate database from RioBroker 3.x

SUBMIT

**Figure 5** The Create Cluster dialog box.

- Enter the desired **Cluster Name**.
- Enter the **PostgreSQL Host** name and **PostgreSQL Port**.
- Enter the **PostgreSQL Admin Login** username.
- Enter and confirm the **Admin Password** for the PostgreSQL admin account.
- If desired, select **Show Advanced** to view the advanced cluster creation options and continue with the following steps, or click **Submit** to create the cluster.
- Enter the **PostgreSQL Database Name**.

- h. Enter the username of the **PostgreSQL Rio DBO User**.
- i. Enter and confirm the **Rio DBO Password** for the Rio DBO user.
- j. Enter the username of the **PostgreSQL Rio Query User**.
- k. Enter and confirm the **Rio Query Password** for the Rio Query user.

**Note:** The **Migrate database from RioBroker 3.x** setting is used when upgrading the Rio MediaEngine application and is not required unless you are upgrading your software. See [Manage the Spectra Rio MediaEngine Application on page 117](#) for upgrade instructions.

- l. Click **Submit**. After a short delay, the Spectra Rio MediaEngine login screen displays.

## Join Cluster:

- a. Click **Join**. The Join Cluster dialog box displays.



**Figure 6** The Join Cluster dialog box.


- b. Enter the cluster URL in the format: <IP address>:<port>.

**Note:** Port 5050 is the default port used by the Spectra Rio MediaEngine application.

- c. Click **Submit**. The Spectra Rio MediaEngine login screen of the **master node** displays.

## 4. On the login screen, enter the **Username** and **Password**.

**Note:** The default username and password are both “**spectra**”. It is recommended that you change the password for this administrator account.

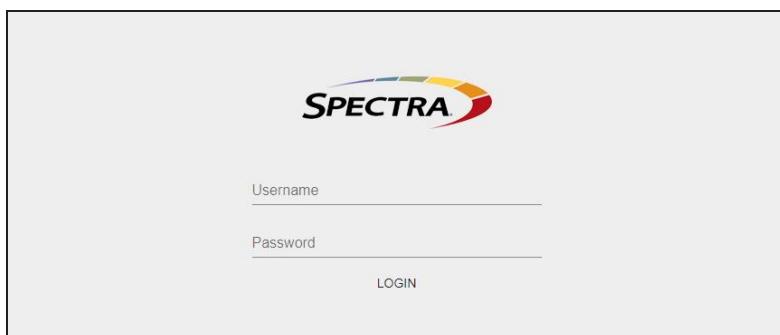

**Figure 7** The Login screen.

5. Click **Login**. The Jobs screen displays. After configuring the Rio Engine application, the Jobs screen shows an overview of all archive and restore jobs.



**Figure 8** The Jobs screen.

# CREATE A DEVICE

Once you are logged in to the application, use the instructions below to create a device as a data repository target. A device is any archive target that the Spectra Rio MediaEngine application can use to archive or restore objects. Each device is individually set up as a generic target for the purposes of physical and logical connections.

You can create a Spectra BlackPearl Object Gateway device, a Diva device, a FlashNet device, a Spectra Vail device, an S3 device, or a Time Based Partial File Restore (TBPFR) device.

On the toolbar in the upper-right of the application window, click **Settings** (gear icon) > **Devices**. The Devices screen displays.

Name	Management Interface	Data Path	Username
limbach-bp	https://10.1.3.204		Administrator
reeves-bp	https://10.1.4.204		Administrator

**Figure 9** The Devices screen.

Select the type of device that you want to create:

- [Create a BlackPearl Device on the next page](#)
- [Create a Diva Device on page 42](#)
- [Create a FlashNet Device on page 43](#)
- [Create a Spectra Vail Device on page 45](#)
- [Create a S3 Device on page 47](#)
- [Create a Time Based Partial File Restore Device on page 48](#)

## Create a BlackPearl Device


Use the instructions below to create a BlackPearl device.

1. Click **New Device**. The New Device dialog box displays.



**Figure 10** The New Device dialog box.

2. From the **Device Type** drop-down menu, select **BlackPearl**. The New Device dialog box refreshes to display the options for configuring a BlackPearl device.

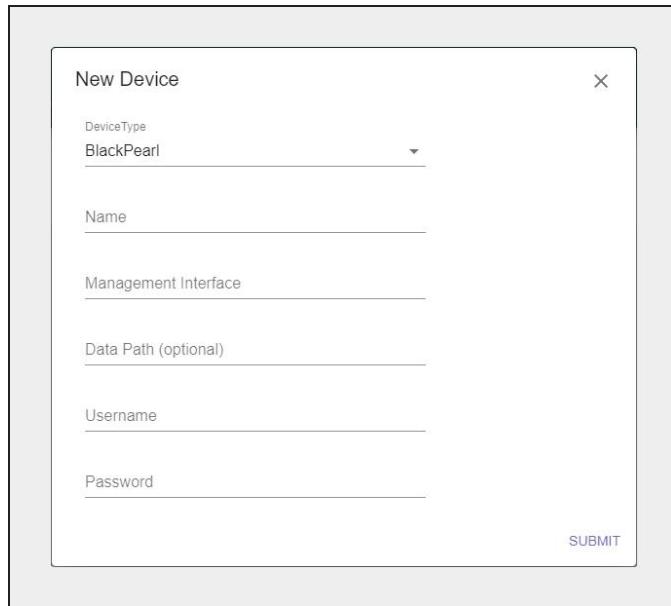

**Figure 11** The New Device - BlackPearl dialog box.

3. Enter the desired **Name** for the BlackPearl device. Device names can only use upper and lowercase letters, numbers, the dash (-), and the underscore (\_) characters.
4. Enter the **Management Interface** IP address of the desired BlackPearl target.

5. If you are connecting to a BlackPearl simulator for testing or development purposes, enter the **Data Path** IP address, of the desired BlackPearl target in the format `http://xxx.xxx.xxx.xxx:8080`. The simulator can only use **http** for the **Data Path**. Otherwise leave this field blank and Rio MediaEngine retrieves this IP address automatically.

6. Enter the **Username** and **Password** of a user configured on the BlackPearl target.

**Note:** Only users with Administrator or Monitor permission are allowed. Users with only Login privilege are not supported by the Spectra Rio MediaEngine application.

7. Click **Submit**. The Devices screen displays showing the newly created BlackPearl device.

**Note:** If the user credentials on the BlackPearl system are changed after creating a BlackPearl device, restart the Rio MediaEngine service using the Windows Services app.

## Create a Diva Device


Use the instructions below to create a Diva device.

1. Click **New Device**. The New Device dialog box displays.



**Figure 12** The New Device dialog box.

2. From the **Device Type** drop-down menu, select Diva. The New Device dialog box refreshes to display the options for configuring a Diva device.

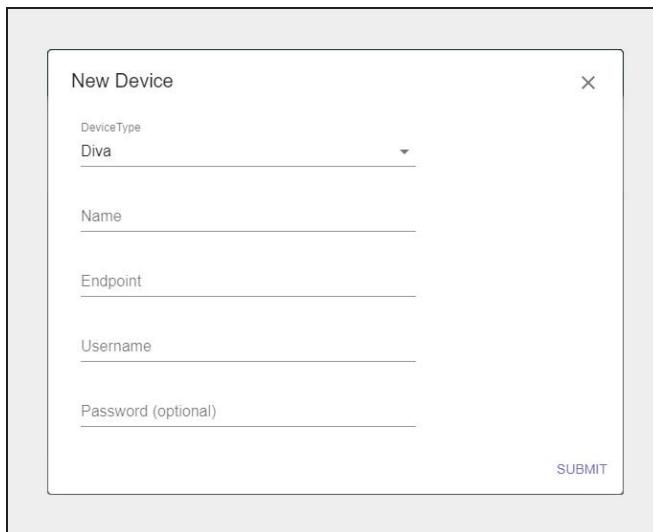

**Figure 13** The New Device - Diva dialog box.

3. Enter the desired **Name** for the Diva device. Device names can only use upper and lowercase letters, numbers, the dash (-), and the underscore (\_) characters.
4. Enter the **Endpoint** for the Diva device. The Endpoint is the API address of the Diva archive.

**Note:** The Diva archive must use API protocol 1.0 or 2.1.

5. Enter the **Username** of a user configured in the Diva application.
6. If desired, enter the **Password** of the user configured in Step 5.
7. Click **Submit**.

## Create a FlashNet Device

Use the instructions below to create a FlashNet device.


1. Click **New Device**. The New Device dialog box displays.



The New Device dialog box is a modal window with a white background and a thin black border. At the top left is the title "New Device" and at the top right is a close button (an "X"). Below the title is a "DeviceType" dropdown menu with a question mark icon above it. The dropdown is currently set to "FlashNet". Below the dropdown is a "Name" input field. At the bottom right of the dialog box is a "SUBMIT" button.

**Figure 14** The New Device dialog box.

2. From the **Device Type** drop-down menu, select FlashNet. The New Device dialog box refreshes to display the options for configuring a FlashNet device.

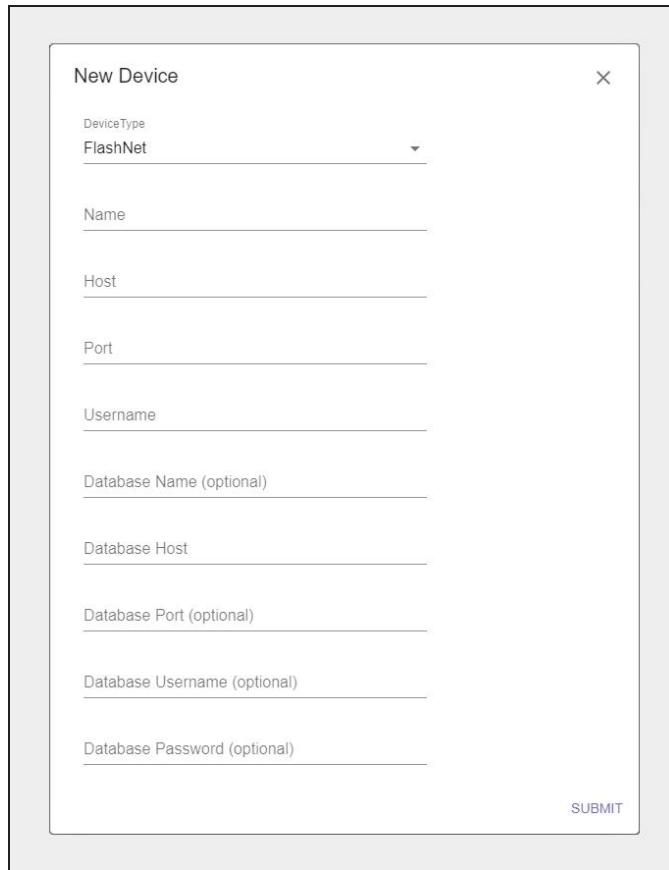

The New Device - FlashNet dialog box is a modal window with a white background and a thin black border. It is a more detailed version of the New Device dialog box. It includes fields for "Name", "Host", "Port", "Username", "Database Name (optional)", "Database Host", "Database Port (optional)", "Database Username (optional)", and "Database Password (optional)". The "DeviceType" dropdown at the top is now set to "FlashNet". At the bottom right is a "SUBMIT" button.

**Figure 15** The New Device - FlashNet dialog box.

3. Enter the desired **Name** for the FlashNet device. Device names can only use upper and lowercase letters, numbers, the dash (-), and the underscore (\_) characters.
4. Enter the **Host** IP address for the FlashNet application.
5. Enter the **Port** used to connect to the FlashNet application.

**Note:** The default port is 8199.

6. Enter the **Username** of a user configured in the FlashNet application.
7. If desired, enter the **Database Name**.
8. For **Database Host**, enter the IP address for the server for the FlashNet database.
9. If desired, enter the **Database Port** used to connect to the database host.

**Note:** The default port is 1433.

10. If desired, enter the **Database Username**, the username of a user configured in the FlashNet database.
11. If you entered a username in Step 10, enter the associated **Database Password**. Otherwise continue with Step 12.
12. Click **Submit**.

## Create a Spectra Vail Device

Use the instructions below to create a Spectra Vail device.

**Note:** The multipart upload threshold for a Vail device is 5 GB. Objects 5 GB or less are archived as a single file. Objects larger than 5 GB are transferred in chunks of 1 GB each.


1. Click **New Device**. The New Device dialog box displays.



The dialog box is titled "New Device". It contains a "DeviceType" dropdown menu with a question mark icon above it. Below it is a "Name" input field. At the bottom right is a "SUBMIT" button.

**Figure 16** The New Device dialog box.

2. From the **Device Type** drop-down menu, select Spectra Vail. The New Device dialog box refreshes to display the options for configuring a Spectra Vail device.

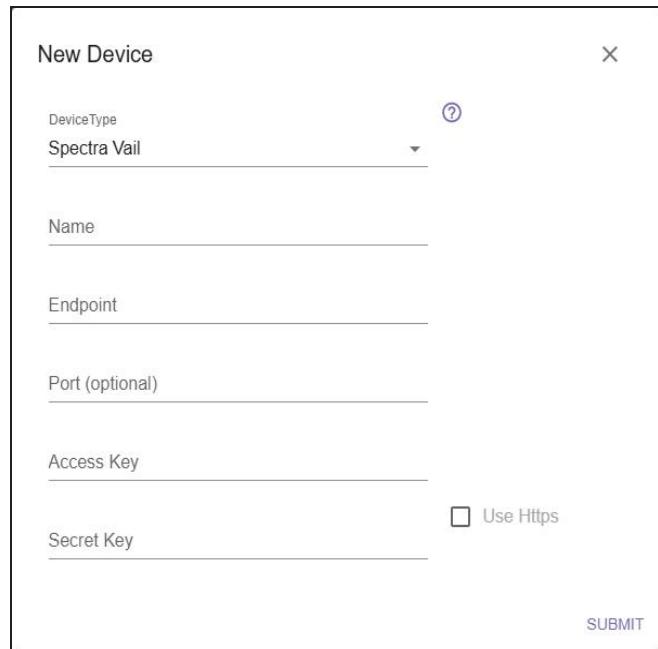

The dialog box is titled "New Device". The "DeviceType" dropdown menu is set to "Spectra Vail". It contains fields for "Name", "Endpoint", "Port (optional)", "Access Key", "Secret Key", and a "UseHttps" checkbox. At the bottom right is a "SUBMIT" button.

**Figure 17** The New Device - Spectra Vail dialog box.

3. Enter the desired **Name** for the Spectra Vail device. Device names can only use upper and lowercase letters, numbers, the dash (-), and the underscore (\_) characters.
4. Enter the public IPv4 address or hostname for the Vail node as the **Endpoint** for the Spectra Vail device.

5. If necessary, enter the **Port** required to connect to the Spectra Vail device.
6. Enter the **AccessKey** and **SecretKey** of an IAM User who has access to Vail node, and is configured in an IAM group with the required policy settings. See the [Vail User Guide](#) for more information.
7. If desired, select **Use Https** to use a secure connection to connect to the Vail device.
8. Click **Submit**.

## Create a S3 Device

Use the instructions below to create a S3 device.


1. Click **NewDevice**. The New Device dialog box displays.



The dialog box is titled 'New Device'. It contains a 'DeviceType' dropdown menu with 'S3' selected. Below it is a 'Name' input field. In the bottom right corner is a 'SUBMIT' button.

**Figure 18** The New Device dialog box.

2. From the **Device Type** drop-down menu, select S3. The New Device dialog box refreshes to display the options for configuring a S3 device.

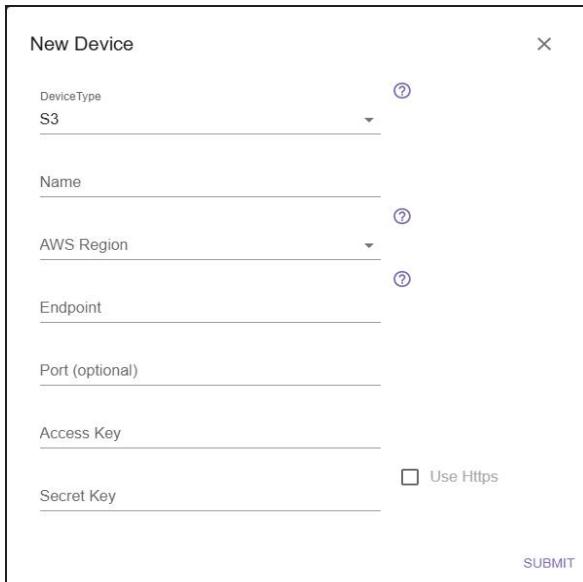

The dialog box is titled 'New Device'. It contains a 'DeviceType' dropdown menu with 'S3' selected. Below it are 'Name', 'AWS Region', and 'Endpoint' input fields. There is also a 'Port (optional)' input field, 'Access Key', and 'Secret Key' input fields. A 'UseHttps' checkbox is located next to the 'Secret Key' field. In the bottom right corner is a 'SUBMIT' button.

**Figure 19** The New Device - S3 dialog box.

3. Enter the desired **Name** for the S3 device. Device names can only use upper and lowercase letters, numbers, the dash (-), and the underscore (\_) characters.
4. Select the **AWS Region** from the drop-down menu.
5. Enter the public IPv4 address or hostname for the S3 device as the **Endpoint**.
6. If necessary, enter the **Port** required to connect to the S3 device.
7. Enter the **AccessKey** and **SecretKey** of an IAM User who has access to the S3 node.
8. If desired, select **UseHttps** to use a secure connection to connect to the S3 device.
9. Click **Submit**.

## Create a Time Based Partial File Restore Device

Use the instructions below to create a Partial File Restore device.


**Note:** If a file in the PFR environment contains a space character ( ), that file fails to index, and cannot be restored using a time code. The file can only be restored using a byte-based Rio MediaEngine restore.

1. Click **New Device**. The New Device dialog box displays.



**Figure 20** The New Device dialog box.

2. From the **Device Type** drop-down menu, select Time Based Partial File Restore. The New Device dialog box refreshes to display the options for configuring a Time Based Partial File Restore device.

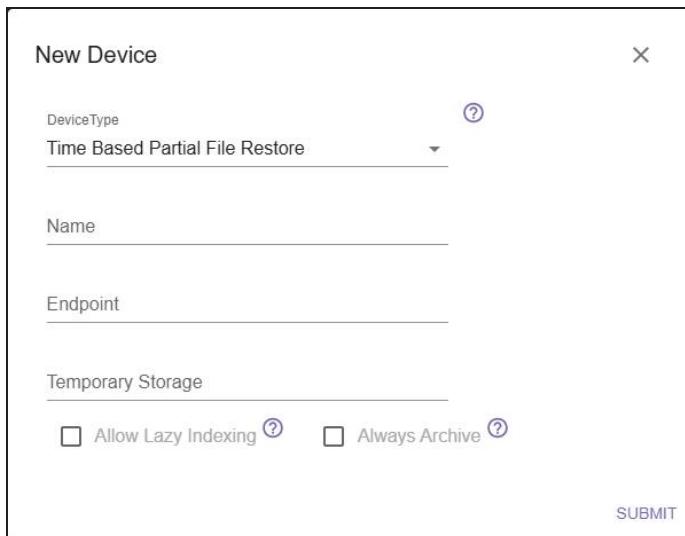

**Figure 21** The New Device - Time Based Partial File Restore dialog box.

3. Enter the desired **Name** for the Time Based Partial File Restore device. Device names can only use upper and lowercase letters, numbers, the dash (-), and the underscore (\_) characters.

4. Enter the **Endpoint**, the IP address of the desired Time Based Partial File Restore target, in the format: `http(s)://<IPv4 address>:60792`.

**Note:** 60792 is the port used by Time Based Partial File Restore.

5. Enter the **Temporary Storage** location of the desired Time Based Partial File Restore target.
  6. If desired, select **Allow Lazy Indexing**. When enabled, the Rio MediaEngine application determines if a file format that was not supported when the file was archived, is now supported by a newer version of PFR software. When an unsupported media format file is restored, the Rio MediaEngine application submits the file to the PFR software to determine if it is now a supported file type.
    - If the file is not supported, the full file is restored to the user.
    - If the file format is supported, it is indexed and partial file restoration is enabled for both this restore, and all future restores of the file. Additionally, the Rio MediaEngine application does not perform the file format check on subsequent restores.
  7. If desired, select **Always Archive**. When this setting is enabled, if objects archived to a Marquis Media Asset Manager are not supported file formats, the files are still archived.
- Notes:**
- Unsupported media formats are not indexed and must be restored as a full file.
  - Currently supported file formats are .MOV and .MXF.
8. Click **Submit**. The Devices screen displays showing the newly created Time Based Partial File Restore device.

# CREATE A NAMESPACE

Once you create a device in the Rio MediaEngine application, use the instructions below to create a namespace.

A namespace is a logical construct that defines a specific archive environment. When creating a namespace, you must specify exactly one target storage on a target system, but additional targets can be added after you create the namespace. There is no limit to the number of targets you can add to a namespace.

Any number of namespaces can be defined within the Spectra Rio MediaEngine application to allow multi-target storage support for archives.

Here is how you create a Namespace:

1. On the toolbar in the upper-right of the application window, click **Settings** (gear icon) > **Namespaces**. The Namespaces screen displays.

Name	Writable	Storage Type	Creation Date	Last Indexed	Details
rio-media-engine-cluster-watchfolder	Writable	Object Count: 183	10/09/2025 11:18:40 AM	10/09/2025 11:18:41 AM	<input checked="" type="checkbox"/>
rio-media-engine-cluster-watchfolder	Writable	Spectra BlackPearl	10/09/2025 11:18:40 AM	10/09/2025 11:18:41 AM	<input checked="" type="checkbox"/>
nas-namespace	Object Count: 0	NAS	10/09/2025 10:04:52 AM	10/09/2025 10:04:52 AM	<input type="checkbox"/>
nas-bucket	Writable	NAS	10/09/2025 10:04:52 AM	10/09/2025 10:04:52 AM	<input type="checkbox"/>

**Figure 22** The Namespaces screen.

2. Click **New Namespace**. The New Namespace wizard displays.

**Figure 23** The Name screen.

3. Enter a **Name** for the Namespace, and click **Next**. You cannot change this setting after creating the Namespace.

4. The next steps depend on what type of target storage you are adding to the Namespace:
  - [\*\*Add a BlackPearl Target Storage on the next page\*\*](#)
  - [\*\*Add a Spectra Vail Target Storage on page 54\*\*](#)
  - [\*\*Add an S3 Target Storage on page 56\*\*](#)
  - [\*\*Add a NAS Target Storage on page 58\*\*](#)
  - [\*\*Add a Diva Target Storage on page 60\*\*](#)
  - [\*\*Add a FlashNet Target Storage on page 62\*\*](#)
  - [\*\*Add an SGL LTFS Target Storage on page 64\*\*](#)

## Add a BlackPearl Target Storage

Here is how you add a BlackPearl target storage:

1. Using the **New Target Storage Type** drop-down menu, select **Add BlackPearl Bucket to XXX**, where XXX is the name of the namespace you assigned on the first screen of the New Namespace wizard. The screen updates to display the options for adding a BlackPearl target storage.

New Namespace

1 Name      2 Add Target Storage      3 Configuration      4 Access

New Target Storage Type  
Add BlackPearl Bucket to doc-example

Writable

Writable

Name

PREVIOUS    NEXT

**Figure 24** The Add Target Storage screen.

2. Using the **Writable** drop-down menu, select either **Writable** or **Read Only**. This setting can be changed after you create the Namespace.
3. Enter a **Name** for the target storage, and click **Next**. You cannot change this name after creating the Namespace.

New Namespace

1 Name      2 Add Target Storage      3 Configuration      4 Access

BlackPearl Name

BlackPearl Username

BlackPearl Bucket

PREVIOUS    NEXT

**Figure 25** The Configuration screen.

4. Using the **BlackPearl Name** drop-down menu, select a previously configured BlackPearl device.
5. In the **BlackPearl Username**, enter the name of the user that has ownership permissions and full access for the bucket specified in Step 6.

6. In the **BlackPearl Bucket** field, enter the name of a previously created bucket on the selected BlackPearl device, then click **Next**.

The screenshot shows the 'New Namespace' configuration screen. At the top, there are four tabs: 'Name' (checked), 'Add Target Storage' (checked), 'Configuration' (checked), and 'Access' (highlighted with a purple border). Below the tabs, a note says 'Provide visibility to these Groups (leave empty for administrator-only access)'. Under the 'Rights' section, there are two groups listed: 'Engineering' and 'Watchfolder'. Each group has a dropdown menu, a 'Restore' button, an 'Archive' button, and a 'Delete' button. A plus sign (+) button is located at the bottom left of the group list. At the bottom right, there are 'PREVIOUS' and 'SUBMIT' buttons.


Figure 26 The Access screen.

7. Using the drop-down menu, select a **Group** to assign access. Select permissions for the group by clicking **Restore**, **Archive**, and **Delete** as desired. You can add more groups by clicking the **Plus** (+) button.
- **Restore** allows group members to perform restore actions.
  - **Archive** allows group members to perform archive actions.
  - **Delete** allows group members to perform delete actions.
- Groups with none of the above selected can only view the target storage.
8. Click **Submit**.

## Add a Spectra Vail Target Storage

Here is how you add a Spectra Vail target storage:

1. Using the **New Target Storage Type** drop-down menu, select **Add Vail Bucket to XXX**, where XXX is the name of the namespace you assigned on the first screen of the New Namespace wizard. The screen updates to display the options for adding a Vail target storage.

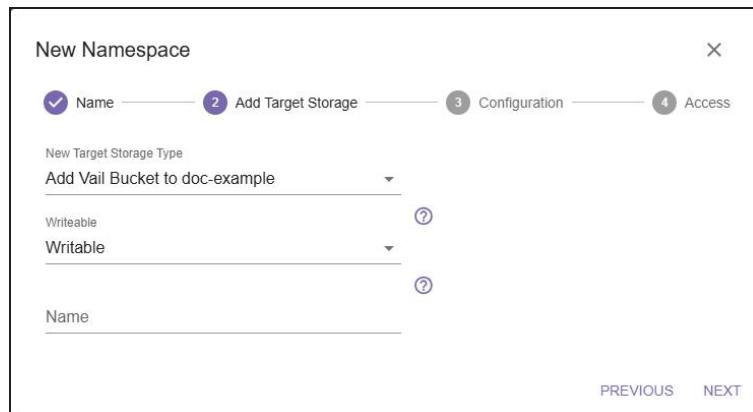

New Namespace

1 Name      2 Add Target Storage      3 Configuration      4 Access

New Target Storage Type  
Add Vail Bucket to doc-example

Writable


Writable

Name

PREVIOUS      NEXT

**Figure 27** The Add Target Storage screen.

2. Using the **Writable** drop-down menu, select either **Writable** or **Read Only**. This setting can be changed after you create the Namespace.
3. Enter a **Name** and click **Next**. You cannot change this name after creating the Namespace.

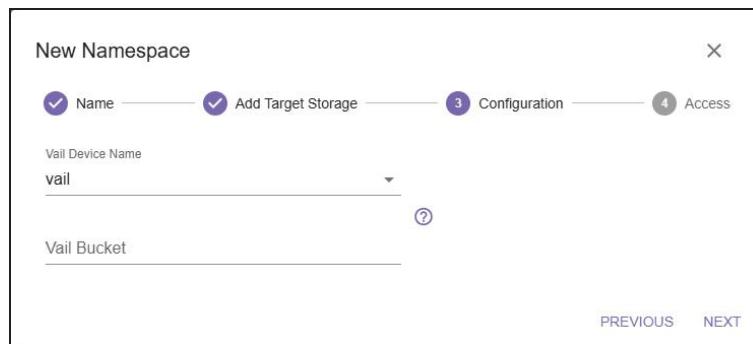

New Namespace

1 Name      2 Add Target Storage      3 Configuration      4 Access

Vail Device Name  
vail


Vail Bucket

PREVIOUS      NEXT

**Figure 28** The Configuration screen.

4. Using the **Vail Device Name** drop-down menu, select a previously configured Vail device.

5. In the **Vail Bucket** field, enter the name of a previously created bucket on the selected Vail device, then click **Next**.

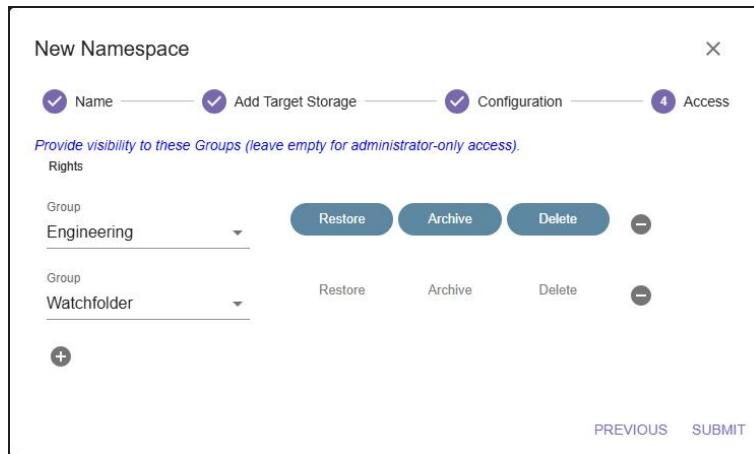

New Namespace

Provide visibility to these Groups (leave empty for administrator-only access).

Rights

Group Engineering

Restore Archive Delete

Group Watchfolder

Restore Archive Delete

+

PREVIOUS SUBMIT


Figure 29 The Access screen.

6. Using the drop-down menu, select a **Group** to assign access. Select permissions for the group by clicking **Restore**, **Archive**, and **Delete** as desired. You can add more groups by clicking the **Plus** (+) button.
- **Restore** allows group members to perform restore actions.
  - **Archive** allows group members to perform archive actions.
  - **Delete** allows group members to perform delete actions.
- Groups with none of the above selected can only view the target storage.
7. Click **Submit**.

## Add an S3 Target Storage


Here is how you add an Amazon S3 compatible S3 target storage:

1. Using the **New Target Storage Type** drop-down menu, select **Add S3-Compatible Bucket to XXX**, where XXX is the name of the namespace you assigned on the first screen of the New Namespace wizard. The screen updates to display the options for adding an Amazon S3 compatible S3 target storage.

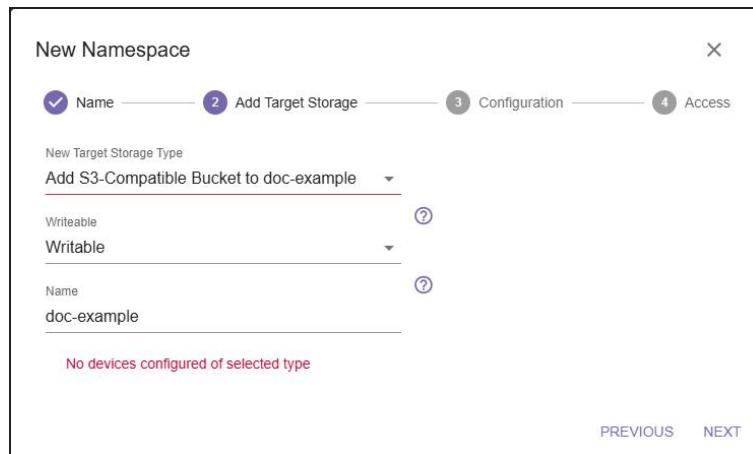

**Figure 30** The Add Target Storage screen.

2. Using the **Writable** drop-down menu, select either **Writable** or **Read Only**. This setting can be changed after you create the Namespace.
3. Enter a **Name** and click **Next**. You cannot change this name after creating the Namespace.

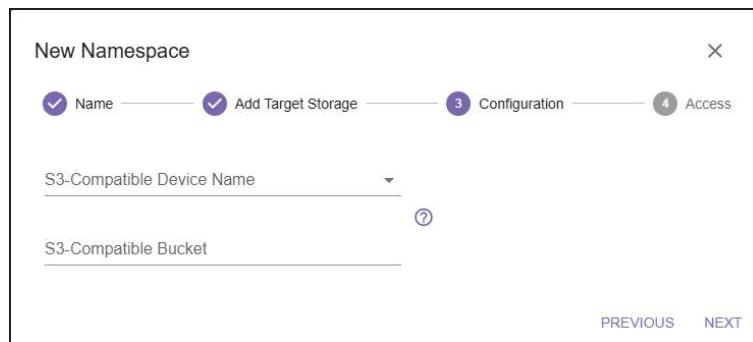

**Figure 31** The Configuration screen.

4. Using the **S3 Device Name** drop-down menu, select a previously configured Amazon S3 compatible S3 device.

5. In the **S3 Bucket** field, enter the name of a previously created bucket on the selected Amazon S3 compatible S3 device, then click **Next**.

New Namespace

Provide visibility to these Groups (leave empty for administrator-only access).

Rights

Group Engineering

Restore Archive Delete

Group Watchfolder

Restore Archive Delete

+

PREVIOUS SUBMIT

Figure 32 The Access screen.

6. Using the drop-down menu, select a **Group** to assign access. Select permissions for the group by clicking **Restore**, **Archive**, and **Delete** as desired. You can add more groups by clicking the **Plus** (+) button.
- **Restore** allows group members to perform restore actions.
  - **Archive** allows group members to perform archive actions.
  - **Delete** allows group members to perform delete actions.
- Groups with none of the above selected can only view the target storage.
7. Click **Submit**.

## Add a NAS Target Storage

Here is how you add a NAS target storage:

1. Using the **New Target Storage Type** drop-down menu, select **Add NAS Folder to XXX**, where XXX is the name of the namespace you assigned on the first screen of the New Namespace wizard. The screen updates to display the options for adding a NAS target storage.

**Figure 33** The Add Target Storage screen.

2. Using the **Writable** drop-down menu, select either **Writable** or **Read Only**. This setting can be changed after you create the Namespace.
3. Enter a **Name** and click **Next**. The target storage is created automatically by the wizard. You cannot change this name after creating the Namespace.

**Figure 34** The Configuration screen.

4. In the **URI** text entry field, enter the URI address for the NAS target in one of the following forms:
  - *file://x.x.x.x/folder name* where *x.x.x.x* is the IPv4 address or hostname of the NAS source storage, and *folder name* is the name of the volume configured on the NAS source storage.
  - *file:///x:/folder name* where *x:* is the drive letter for the NAS source storage on the local host, and *folder name* is the name of the volume configured on the NAS source storage.

5. Click **Next**.

New Namespace

✓ Name    ✓ Add Target Storage    ✓ Configuration    4 Access

Provide visibility to these Groups (leave empty for administrator-only access).

Rights

Group	Restore	Archive	Delete
Engineering	Restore	Archive	Delete
Watchfolder	Restore	Archive	Delete

+

PREVIOUS   SUBMIT

**Figure 35** The Access screen.

6. Using the drop-down menu, select a **Group** to assign access. Select permissions for the group by clicking **Restore**, **Archive**, and **Delete** as desired. You can add more groups by clicking the **Plus** (+) button.

- **Restore** allows group members to perform restore actions.
- **Archive** allows group members to perform archive actions.
- **Delete** allows group members to perform delete actions.

Groups with none of the above selected can only view the target storage.

7. Click **Submit**.

## Add a Diva Target Storage

Here is how you add a Diva target storage:

1. Using the **New Target Storage Type** drop-down menu, select **Add Diva Category to XXX**, where XXX is the name of the namespace you assigned on the first screen of the New Namespace wizard. The screen updates to display the options for adding a Diva target storage.

New Namespace

1 Name      2 Add Target Storage      3 Configuration      4 Access

New Target Storage Type  
Add Diva Category to doc-example

Name  
doc-example

PREVIOUS      NEXT

**Figure 36** The Add Target Storage screen.

2. Enter a **Name** and click **Next**. You cannot change this name after creating the Namespace.

New Namespace

1 Name      2 Add Target Storage      3 Configuration      4 Access

Diva Device Name  
diva

Category

QOS (Optional)

Priority (Optional)

Concatenate Object Names

PREVIOUS      NEXT

**Figure 37** The Configuration screen.

3. Using the **Diva Device Name** drop-down menu, select a previously configured Diva device.
4. Enter the desired **Category** to be used in the namespace. In Diva, a category and object pair is a unique logical construct. An object cannot exist multiple times in a category.

**Note:** You may use the asterisk (\*) to allow multiple categories to use the namespace. This allows you to use the same file name in multiple categories.

5. Optionally, enter the **QOS** (Quality Of Service) to be used. This is the QOS setting used when **Default** is specified in a request's Quality of Service field in the DIVA application.

**Note:** After the Diva namespace is created, the QOS setting cannot be changed using the Rio MediaEngine application interface. If the QOS must be changed at a later date, contact Spectra Logic Technical Support for assistance (see [Contacting Spectra Logic on page 3](#)).


6. Enter the **Priority** for the Diva namespace. This setting controls the priority level for the namespace. The level can be in the range zero to 100, or the value **Default**. The value zero is the lowest priority and 100 is the highest priority. **Default** uses the value configured by the Diva system.

**Note:** After the Diva namespace is created, the Priority setting cannot be changed using the Rio MediaEngine application interface. If the Priority must be changed at a later date, contact Spectra Logic Technical Support for assistance (see [Contacting Spectra Logic on page 3](#)).

7. If desired, click **Concatenate Object Names**.

**Note:** Ensure that your clients can use this behavior before enabling.

8. Click **Next**.

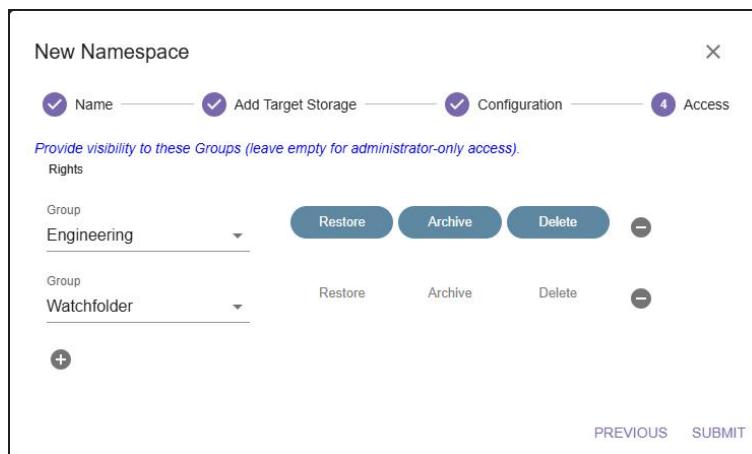

**Figure 38** The Access screen.

9. Using the drop-down menu, select a **Group** to assign access. Select permissions for the group by clicking **Restore**, **Archive**, and **Delete** as desired. You can add more groups by clicking the **Plus** (+) button.

- **Restore** allows group members to perform restore actions.
- **Archive** allows group members to perform archive actions.
- **Delete** allows group members to perform delete actions.

Groups with none of the above selected can only view the target storage.

10. Click **Submit**.

## Add a FlashNet Target Storage

Here is how you add a FlashNet target storage:

1. Using the **New Target Storage Type** drop-down menu, select **Add FlashNet Group to XXX**, where XXX is the name of the namespace you assigned on the first screen of the New Namespace wizard. The screen updates to display the options for adding a FlashNet target storage.

New Namespace

1 Name    2 Add Target Storage    3 Configuration    4 Access

New Target Storage Type  
Add FlashNet Group to doc-example

Name  
doc-example

No devices configured of selected type

PREVIOUS    NEXT

**Figure 39** The Add Target Storage screen.

2. Enter a **Name** and click **Next**. You cannot change this name after creating the Namespace.

New Namespace

1 Name    2 Add Target Storage    3 Configuration    4 Access

FlashNet Device

Application

Storage Group

Priority (Optional)

PREVIOUS    NEXT

**Figure 40** The Configuration screen.

3. Use the **FlashNet Device** drop-down menu to select a previously created FlashNet device.
4. Enter the desired name for the FlashNet **Application**.

**Note:** The application name can be anything but it is a best practice to use the same name as the associated FlashNet service.

5. Enter the name of the desired **Storage Group** to use with this namespace.

**Note:** If you do not specify a storage group, the FlashNet namespace indexes data from all storage groups configured on the FlashNet system.

6. Enter the **Priority** for the FlashNet namespace. This setting controls the priority level for the namespace. The level can be in the range zero to 100, or the value **Default**. The value zero is the lowest priority and 100 is the highest priority. **Default** uses the value configured by the FlashNet system.

**Note:** If the priority must be changed at a later date, contact Spectra Logic Technical Support for assistance.

The screenshot shows the 'New Namespace' configuration interface. At the top, there are four tabs: 'Name' (checked), 'Add Target Storage' (checked), 'Configuration' (checked), and 'Access' (highlighted with a purple border). Below the tabs, a note says 'Provide visibility to these Groups (leave empty for administrator-only access)'. There are two sections for 'Rights': 'Engineering' and 'Watchfolder'. For 'Engineering', there are 'Restore', 'Archive', and 'Delete' buttons. For 'Watchfolder', there are 'Archive' and 'Delete' buttons. A plus sign (+) button is located at the bottom left of the group list. At the bottom right, there are 'PREVIOUS' and 'SUBMIT' buttons.

**Figure 41** The Access screen.

7. Click **Next**.
8. Using the drop-down menu, select a **Group** to assign access. Select permissions for the group by clicking **Restore**, **Archive**, and **Delete** as desired. You can add more groups by clicking the **Plus** (+) button.
  - **Restore** allows group members to perform restore actions.
  - **Archive** allows group members to perform archive actions.
  - **Delete** allows group members to perform delete actions.


Groups with none of the above selected can only view the target storage.

9. Click **Submit**.

## Add an SGL LTFS Target Storage

Here is how you add an SGL LTFS target storage:

1. Using the **New Target Storage Type** drop-down menu, select **Add SGL LTFS Bucket to XXX**, where XXX is the name of the namespace you assigned on the first screen of the New Namespace wizard. The screen updates to display the options for adding an SGL LTFS target storage.

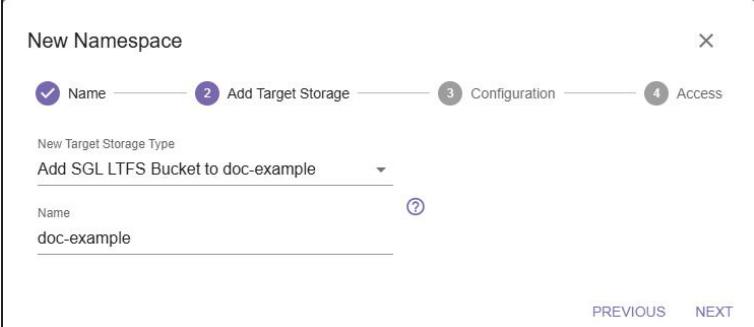

New Namespace

1 Name      2 Add Target Storage      3 Configuration      4 Access


New Target Storage Type  
Add SGL LTFS Bucket to doc-example

Name  
doc-example

PREVIOUS      NEXT

**Figure 42** The Add Target Storage screen.

2. Enter a **Name** and click **Next**. You cannot change this name after creating the Namespace.

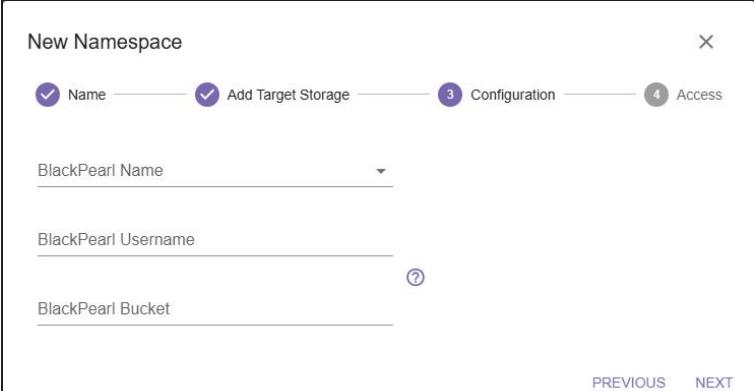

New Namespace

1 Name      2 Add Target Storage      3 Configuration      4 Access

BlackPearl Name

BlackPearl Username

BlackPearl Bucket

PREVIOUS      NEXT

**Figure 43** The Configuration screen.

3. Using the drop-down menu, select the **BlackPearl Name** of a previously configured BlackPearl device.
4. Enter the **BlackPearl Username** of a user configured on the BlackPearl device selected in Step 3.

5. Enter the name of a previously created **BlackPearl Bucket** associated with the user selected. Click **Next**.

The screenshot shows the 'New Namespace' configuration screen. The 'Access' section is active, indicated by a purple circle with the number '4'. The 'Name', 'Add Target Storage', and 'Configuration' fields are also checked. The 'Group' dropdowns show 'Engineering' and 'Watchfolder'. For each group, there are 'Restore', 'Archive', and 'Delete' buttons. A plus sign (+) button is available to add more groups. At the bottom are 'PREVIOUS' and 'SUBMIT' buttons.

Figure 44 The Access screen.

6. Using the drop-down menu, select a **Group** to assign access. Select permissions for the group by clicking **Restore**, **Archive**, and **Delete** as desired. You can add more groups by clicking the **Plus** (+) button.
- **Restore** allows group members to perform restore actions.
  - **Archive** allows group members to perform archive actions.
  - **Delete** allows group members to perform delete actions.
- Groups with none of the above selected can only view the target storage.
7. Click **Submit**.


# CREATE LIFECYCLES AND POLICIES

A Lifecycle controls when data is archived, and how long data is persisted. The Rio MediaEngine application features three pre-configured Lifecycles for each of the three most common use case scenarios. Additional lifecycles can be created and configured for your storage environment requirements.

A Policy is used to assign a Lifecycle to the buckets used in Namespaces. Each bucket can use a different lifecycle, and there must be at least one lifecycle with the Archive Immediate rule. Only one policy can be assigned to a namespace. A policy also allows you to restrict transfers during peak hours on a per-day basis.

## Create a Lifecycle

1. On the toolbar in the upper-right of the application window, click **Settings** (gear icon) > **Lifecycles**.
2. Click **New Lifecycle**.

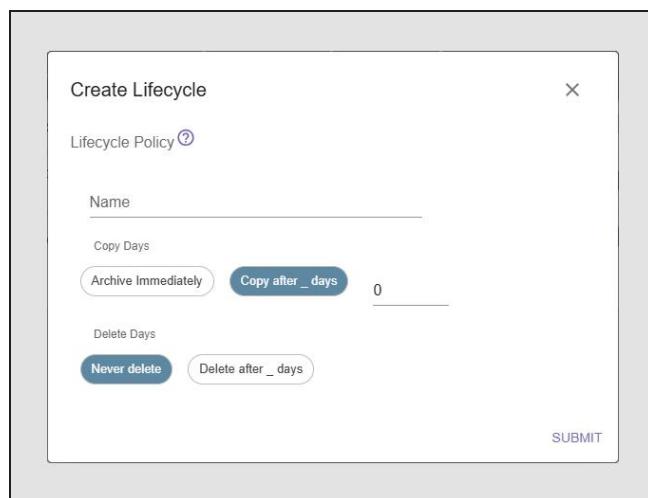

**Figure 45** The Create Lifecycle screen.

3. Enter a **Name** for the Lifecycle.
4. Select **Archive Immediately** or **Copy after \_ days**. If you select Copy after \_ days, enter a value in the entry field for the number of days to wait before archiving data.
  - Archive Immediately copies data to a bucket as soon as it is placed into a endpoint.
  - Copy after copies data to a bucket after the specified number of days.
5. Select **Never Delete** or **Delete after \_ days**. If you select Delete after \_ days, enter a value in the entry field for the number of days you want data to persist before it is deleted.
6. Click **Submit**.

## Create a Policy


A policy is used to set Lifecycles for each bucket in a Namespace. A namespace configured with multiple buckets can use different lifecycles in the namespace policy to control where and for how long data is persisted. A Policy also allows you to configure blackout times to control when archives take place. Additionally, a Policy with multiple buckets also specifies the priority for the restore source.

- Buckets do not need to have a Lifecycle configured.
- At least one Lifecycle in a Policy must have an archive rule of Archive Immediately.

Here is how you configure a Policy:

1. On the toolbar in the upper-right of the application window, click **Settings** (gear icon) > **Namespaces**. The Namespaces screen displays.
2. Select the namespace for which you want to configure a policy and click **Policies**.
3. For each bucket, use the **Lifecycle** drop-down menu to select a previously configured lifecycle.

**Note:** If you do not want to assign a lifecycle that controls data placement or retention, select the Do Nothing lifecycle. This lifecycle is created by default.

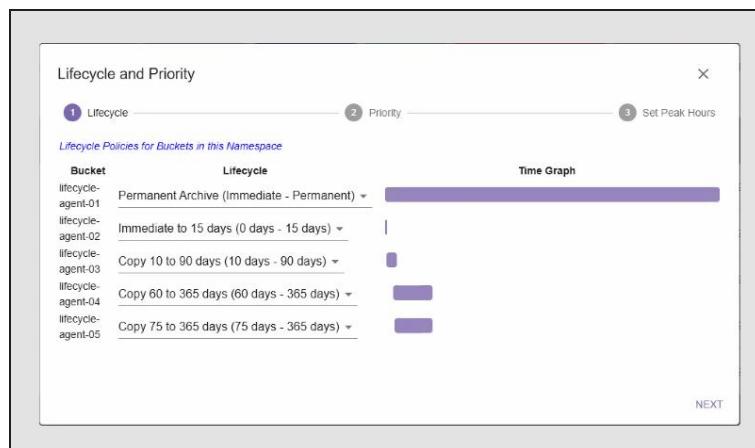

**Figure 46** The Lifecycle screen.

4. Click **Next**.

5. Using the **Restore Priority** arrow buttons, arrange the buckets in the order you want data to be restored, with the topmost selection being the primary restore source.

**Note:** This screen only displays if you have configured multiple buckets in the Namespace.

The screenshot shows the 'Lifecycle and Priority' screen. At the top, there are three tabs: 'Lifecycle' (selected), 'Priority' (with an info icon), and 'Set Peak Hours' (with an info icon). Below the tabs, it says 'Buckets for this Namespace, in restore priority order'. A table lists five buckets with their current priority and a set of up/down arrows to change the priority. The buckets are: lifecycle-agent-05 (priority 05), lifecycle-agent-04 (priority 04), lifecycle-agent-03 (priority 03), lifecycle-agent-02 (priority 02), and lifecycle-agent-01 (priority 01). At the bottom right are 'PREVIOUS' and 'NEXT' buttons.

**Figure 47** The Priority screen.

6. Click **Next**.

7. If desired, you can restrict the hours that data is transferred on a per-bucket basis:

- a. Select the bucket for which you want to restrict transfer hours and select **Restrict transfer during peak hours**.

The screenshot shows the 'Lifecycle and Priority' screen with the 'Set Peak Hours' tab selected. It displays a list of days of the week: SU, MO, TU, WE, TH, FR, SA. Each day has a time slider from 08:00 to 17:00. The 'Restrict transfer during peak hours' checkbox is checked. Below the days, a note says 'Transfers will not be performed during these hours'. At the bottom right are 'PREVIOUS' and 'SUBMIT' buttons.

**Figure 48** The Set Peak Hours screen.

- b. On the right-hand side of the screen, click the name of the day you want to configure restricted hours, then use the time sliders to configure the hours to restrict transfers.
- c. If desired, repeat for additional buckets.

8. Click **Submit**.

## Configure the Lifecycle Cache

In order to migrate files/objects to different buckets within a namespace as part of the lifecycle, the Rio lifecycle cache must be configured. The process of migration from one bucket to another is a copy job that checks if the file is in the cache and then performs the following:

- If the object **is in** the cache, the file is archived from the cache to the target bucket.
- If the object **is not in** cache, the file is restored to the cache and then archived to the target bucket.

Here is how to configure the cache:

1. On the toolbar, click **Settings** (gear icon) and select **System**. The System information screen displays.

API Docs (local system only)	/api.viewer/index.html
Version	5.0.0-dev
API Version	5.0.0
Build	1191
Build Type	nightly
Database Host	localhost:5432
JVM Version	21.0.5
Uptime	2 days 0 hours 9 minutes 16 seconds
Total Memory	632 MB
Used Memory	171.7 MB
Free Memory	460.3 MB
Main Rio Server OS Name	Windows 11
Main Rio Server OS Version	10.0
Main Rio Server Cores	22

**Figure 49** The System screen.

2. Click **Configure Cache**.

URI	
Maximum Size	GB

**Figure 50** The System screen.

3. Enter the **URI** address where you want to create the cache file in one of the following forms:
    - *file://x.x.x.x/folder name* where *x.x.x.x* is the IPv4 address or hostname of the NAS endpoint, and *folder name* is the name of the volume configured on the NAS endpoint.
    - *file:///x:/folder name* where *x:* is the drive letter for the NAS endpoint on the local host, and *folder name* is the name of the volume configured on the NAS endpoint.
  4. Enter the **Maximum Size** in GB of the cache file. Generally, a larger size cache allows for faster migrations. If a small cache is configured, slower migrations may occur.
- 



**IMPORTANT**

The cache must be larger than the largest object you want to migrate, otherwise the object cannot migrate.


---

5. Click **Submit**.

## CREATE A SOURCE STORAGE

Source Storages are used as the source of data to ingest into the Rio MediaEngine application, as well as the targets of data restored from the application. When a file is placed in source storage, the file is made available to the Rio MediaEngine application. Once there, the file can be archived to any namespace.

Source Storages can be pre-configured to replace URIs. On the toolbar in the upper-right of the application window, click **Settings** (gear icon) > **Source Storage**. The Source Storage screen displays.

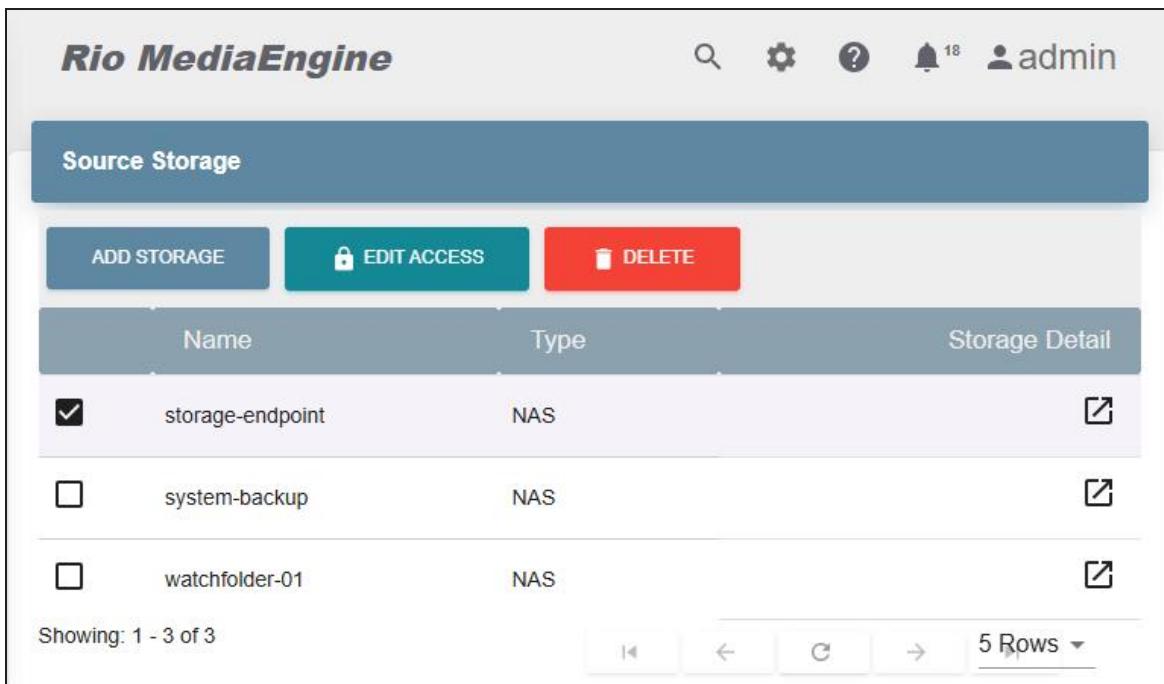

Name	Type	Storage Detail
storage-endpoint	NAS	<input checked="" type="checkbox"/>
system-backup	NAS	<input type="checkbox"/>
watchfolder-01	NAS	<input type="checkbox"/>

**Figure 51** The Source Storage screen.

Choose the type of source storage that you want to create:

- [Configure the Spectra Rio MediaEngine Application on page 33](#)
- [Configure the Spectra Rio MediaEngine Application on page 33](#) - Amazon® S3 or Third Party S3
- [Configure the Spectra Rio MediaEngine Application on page 33](#)
- [Create a Linux Source Storage on page 77](#)

## Create an FTP Source Storage

1. Click **Add Storage**. The Add Storage dialog box displays with NAS selected as the type.
2. Using the **Type** drop-down menu, select **FTP**. The dialog box changes to show fields used to configure an FTP source storage.

The screenshot shows the 'Add Storage' dialog box with the following fields and options:

- Type:** FTP (selected)
- Name:** (empty text input)
- Location:** (empty text input)
- Username:** (empty text input)
- Password:** (empty text input)
- Rights:** (dropdown menu with 'Group' selected, showing a '+' button to add groups and a '-' button to remove groups. Buttons for 'Archive from' and 'Restore to' are also present.)
- Group:** (dropdown menu showing 'Group')
- Archive from:** (button)
- Restore to:** (button)
- SUBMIT** (button at the bottom right)

**Figure 52** The Add Storage - FTP dialog box.

3. Enter the desired **Name** for the source storage. Source storage names can only use upper and lowercase letters, numbers, the dash (-), and the underscore (\_) characters.
4. Enter the IP address or host name for the **Location** with the prefix ftp (for example, `ftp://xxx.xxx.xxx.xxx`).
5. Enter the **Username** and **Password** of a user configured to use the FTP server.
6. Use the **Rights** drop-down menu to select which groups can see the source storage.
7. Click **Archive from** and **Restore to** as desired to grant the selected group permission to perform archive and restore actions on the source storage.
8. Click **Submit**. The Source Storage screen displays showing the newly created source storage.


Once the source storage is created, use the following format for the endpoint URI when creating archive or restore commands using the API:

```
{  
  "files": [  
    {  
      "name": "[filename]",  
      "uri": "[endpoint://endpointname/filename]"  
    }  
  ]  
}
```

where *endpointname* is the name you entered in [Step 3 on page 72](#).

## Create an S3 Source Storage

1. Click **Add Storage**. The Add Storage dialog box displays with **NAS** selected as the type.
2. Using the **Type** drop-down menu, select **S3**. The dialog box changes to show fields used to configure an S3 source storage.

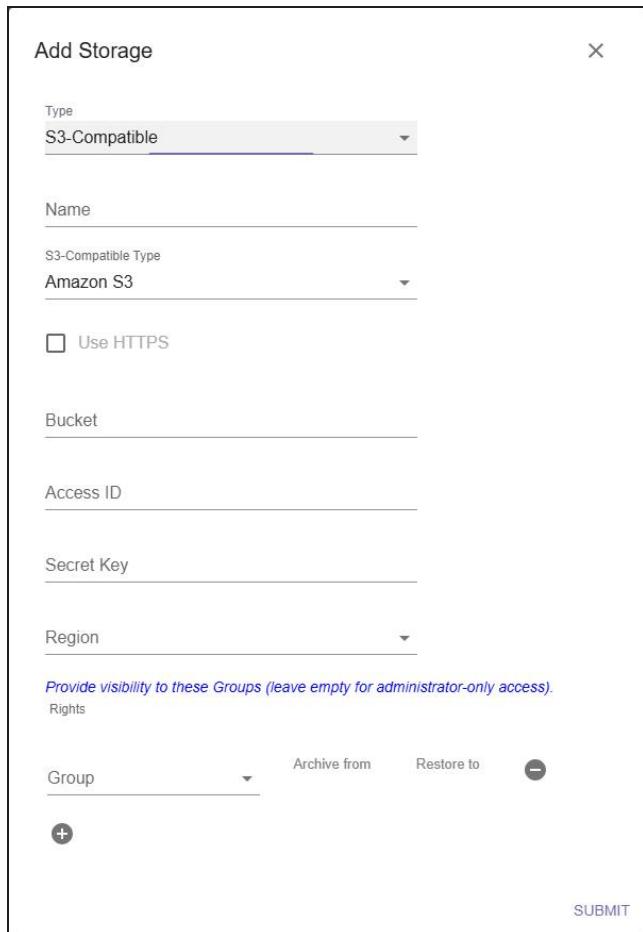

The screenshot shows the 'Add Storage' dialog box for 'S3-Compatible' storage. The fields are as follows:

- Type:** S3-Compatible
- Name:** (empty)
- S3-Compatible Type:** Amazon S3
- Use HTTPS:** (unchecked)
- Bucket:** (empty)
- Access ID:** (empty)
- Secret Key:** (empty)
- Region:** (empty)
- Rights:** (empty)
- Group:** (empty)
- Archive from:** (empty)
- Restore to:** (empty)
- +** (button to add a group)
- SUBMIT** (button at the bottom right)

**Figure 53** The Add Storage - S3 dialog box.

3. Enter the desired **Name** for the source storage.
4. Select whether this is an **Amazon S3** endpoint or a **Third Party S3** endpoint.
5. Select whether to use **HTTPS** when connecting to the endpoint. If you select this option, the Rio MediaEngine application uses port 443. Otherwise the application uses port 80.
6. Enter the name of a **Bucket** configured on the source storage. Do not include a folder or prefix name. Bucket names are case sensitive.
7. Enter the **Access ID** and **Secret Key** of a user with credentials for the S3 account and the bucket that will be used for data storage.

8. Depending on your selection in Step 4 on page 74 do one of the following:
  - If you selected **Amazon S3**, use the drop-down list to select the **Region**.
  - If you selected **Third Party S3**, enter the **Hostname** or IP address for the source storage. Optionally, enter a **Port** number.

- Notes:**
- Do include a port number with the source storage hostname or IP address.
  - The Rio MediaEngine application uses virtual hosting by default (for example: <https://bucketname.hostname.com>). If you do not want to use the virtual hosting of bucket names, enter an IP address instead of an endpoint hostname.

9. Use the **Rights** drop-down menu to select which groups can see the source storage.

10. Click **Archive from** and **Restore to** as desired to grant the selected group permission to perform archive and restore actions on the source storage.

11. Click **Submit**. The Source Storage screen displays showing the newly created source storage.


Once the source storage is created, use the following format for the source storage URI when creating archive or restore commands using the API:

```
{  
  "files": [  
    {  
      "name": "[filename]",  
      "uri": "[endpoint://endpointname/filename]"  
    }  
  ]  
}
```

where `endpointname` is the name you entered in Step 3 on page 74.

## Create a NAS Source Storage

1. Click **Add Storage**. The Add Storage dialog box displays with NAS selected as the type.

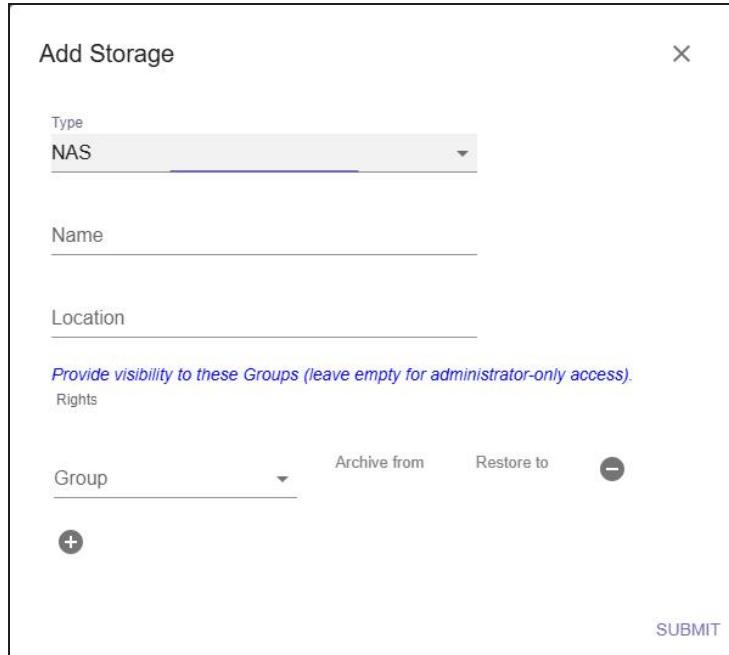

**Figure 54** The Add Storage - NAS dialog box.

2. Enter the desired **Name** for the source storage.
3. Enter the URI for the **Location** in one of the following forms:
  - `file://x.x.x.x/folder name` where `x.x.x.x` is the IPv4 address or hostname of the NAS endpoint, and `folder name` is the name of the volume configured on the NAS endpoint.
  - `file:///x:/folder name` where `x:` is the drive letter for the NAS endpoint on the local host, and `folder name` is the name of the volume configured on the NAS endpoint.
4. Use the **Rights** drop-down menu to select which groups can see the source storage.
5. Click **Archive from** and **Restore to** as desired to grant the selected group permission to perform archive and restore actions on the source storage.
6. Click **Submit**. The Source Storage screen displays showing the newly created source storage.
7. Once the source storage is created, use the following format for the endpoint URI when creating archive or restore commands using the API:

```
{"files": [ {"name": "[filename]", "uri": "[endpoint://endpointname/filename]" } ]}
```

where `endpointname` is the name you entered in Step 2 on page 76.

## Create a Linux Source Storage

The Rio MediaEngine service can use any mounted file system path for archive or restore operations provided the user has the correct privileges.

URIs can be specified as paths or defined as source storages. In a cluster environment, source storages are required to provide the same path across multiple machines.

**1.** If not previously installed, install nfs-utils.

**2.** Enter the following on your Linux server:

```
$ mkdir /mnt/myNFS1
```

```
$ mount -t nfs HostIP:/export/test_data/nfs1 /mnt/myNFS1
```

**3.** Using the Rio MediaEngine user interface, click **Add Storage**. The Add Storage dialog box displays with NAS selected as the type.

**4.** Enter the desired **Name** for the source storage.

**5.** Enter the following for the **Location**:

```
file://mnt/myNFS1
```

**6.** Use the **Rights** drop-down menu to select which groups can see the source storage.

**7.** Click **Archive from** and **Restore to** as desired to grant the selected group permission to perform archive and restore actions on the source storage.

**8.** Click **Submit**.

**9.** To share data with Windows OS, create a CIFS share. To create a CIFS share, use the following steps. Otherwise, continue from Step 12 on page 77 to finish configuring the source storage.

**10.** If not previously installed, install gfs-utils.

**11.** Enter the following on your Linux server:

```
$ mkdir /mnt/myCIFS1
```

```
$ mount -t cifs -o username=user //HostIP/MyCifsVolume/MyCifsShare1 /mnt/myCIFS1
```

**12.** Using the Rio MediaEngine user interface, click **Add Storage**. The Add Storage dialog box displays with NAS selected as the type.

**13.** Enter the desired **Name** for the source storage.

**14.** Enter the following for the **Location**:

```
file://mnt/myCIFS1
```

**15.** Use the **Rights** drop-down menu to select which groups can see the source storage.

16. Click **Archive from** and **Restore to** as desired to grant the selected group permission to perform archive and restore actions on the source storage.
17. Click **Submit**.

# TEST THE INSTALLATION

To test the installation, you need to download Postman or a similar tool. Postman is a generic restful client with a free version available for Windows OS and macOS. Postman is used for sending commands through the Spectra Rio MediaEngine application.


Postman can be downloaded from <https://www.getpostman.com/downloads/>.

You can view all API commands on the computer where Rio MediaEngine is installed from <https://localhost:5050/api/viewer/index.html>.

Use the instructions in this section to test your installation.


## Test Setup

1. Start Postman. The main screen displays.

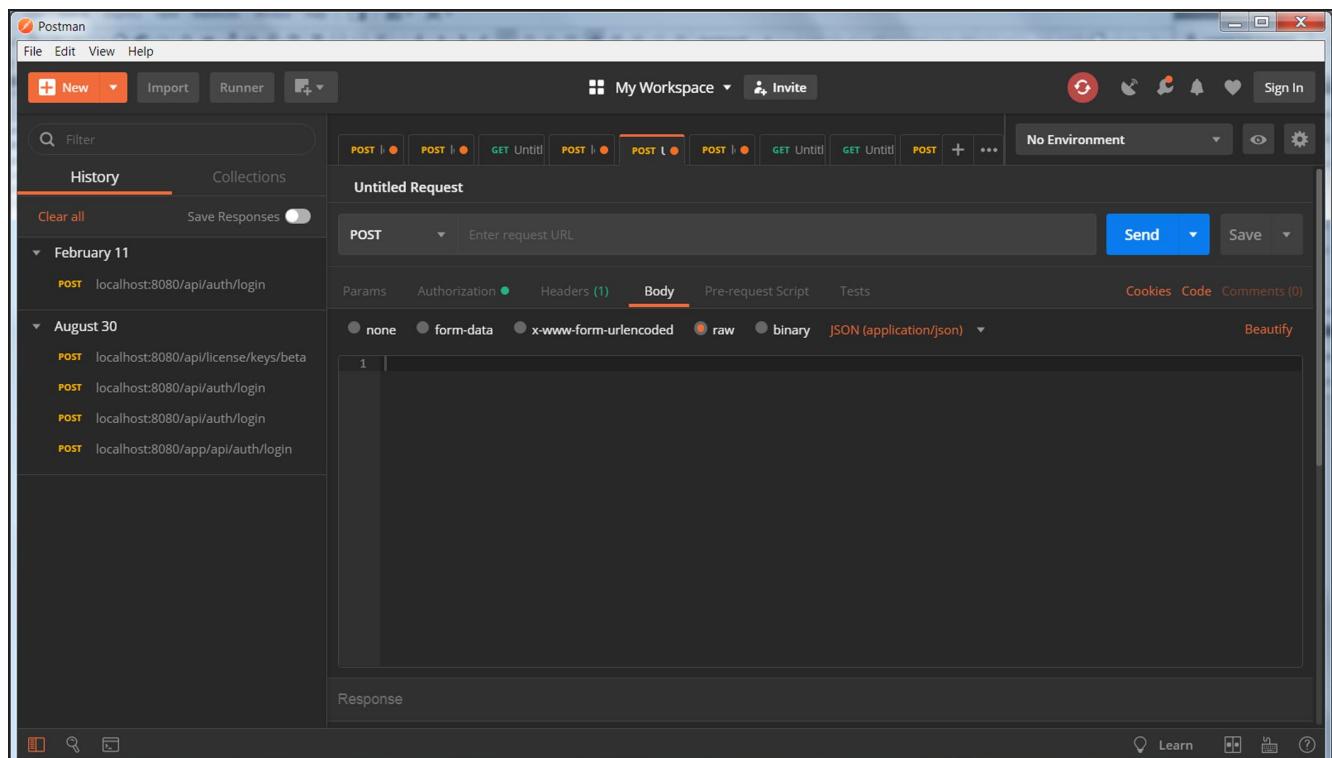

**Figure 55** The Postman main screen.

2. Navigate to **File > Settings**. The settings screen displays.

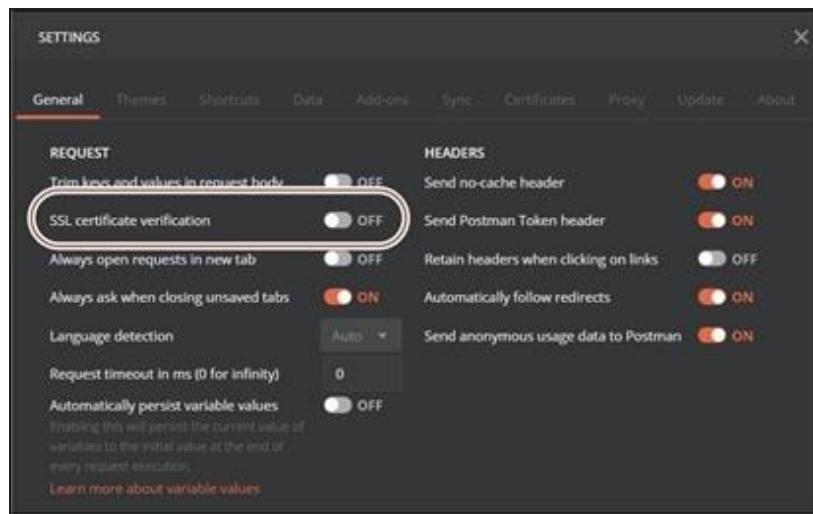


**Figure 56** The Postman Settings screen.

3. Turn off **SSL certificate verification** and close the Settings dialog box.
4. If necessary, on the main screen select the Body tab. Verify that **raw** and **JSON (application/json)** are selected. See Chapter 3 on page 33.

**Note:** These settings are used for all communications with Rio MediaEngine.

5. Use the following steps to obtain an authorization token. Authorization tokens expire in one hour, but can be generated as often as needed during testing.

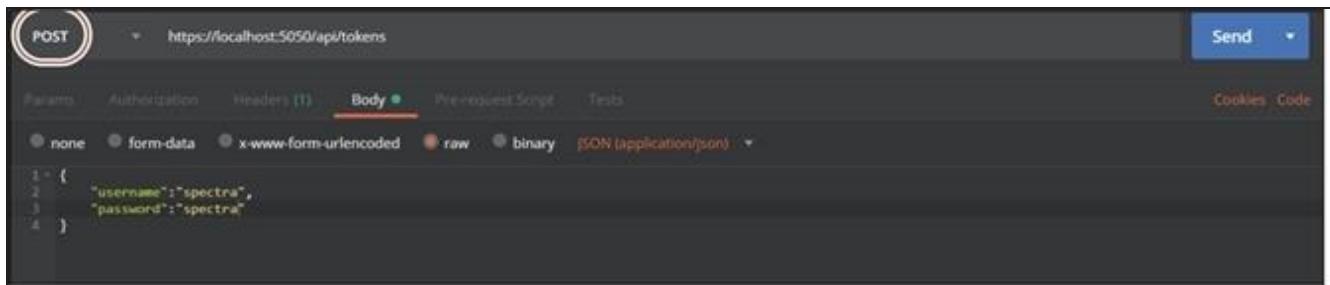

**Figure 57** Request an authorization token using Postman.


- a. If necessary, select **POST** from the drop-down menu next to the Request URL field.
- b. Enter the command `https://localhost:5050/api/tokens` in the Request URL field.
- c. In the Body area, enter:

```
{
  "username": "spectra",
  "password": "spectra"
}
```

- d. Click **Send**. The response displays in the response pane. Copy the token.

**Figure 58** The response from the token request.

- In the workspace, select the **Authorization** tab.

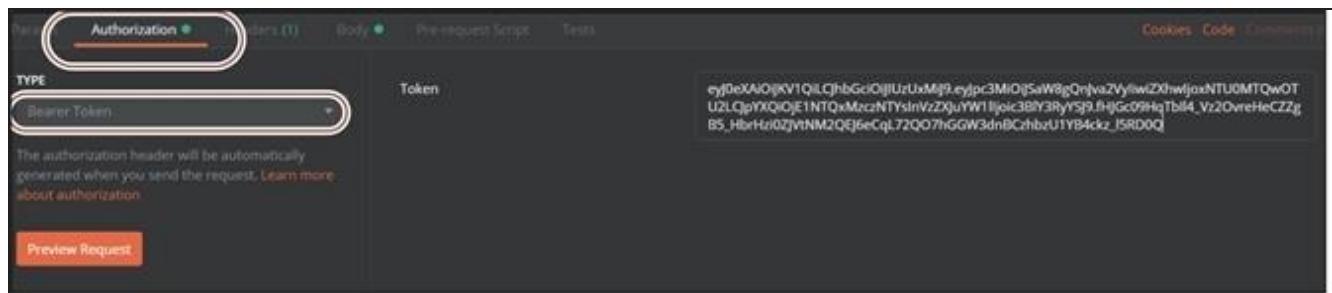

**Figure 59** Enter the token.

- Very that **Type** is set to Bearer Token and paste the token in the Token field.


**Note:** Each new tab in Postman needs to have the token pasted into the authorization field.

## Test with a Small Text File

Use a small text file to test communication to the Rio MediaEngine application.

- Create a small text file to use for testing.
- Use the following steps to archive the small text file to the BlackPearl system using the Spectra Rio MediaEngine application.

**Note:** The following example uses a file named Testing1.txt located on the desktop.

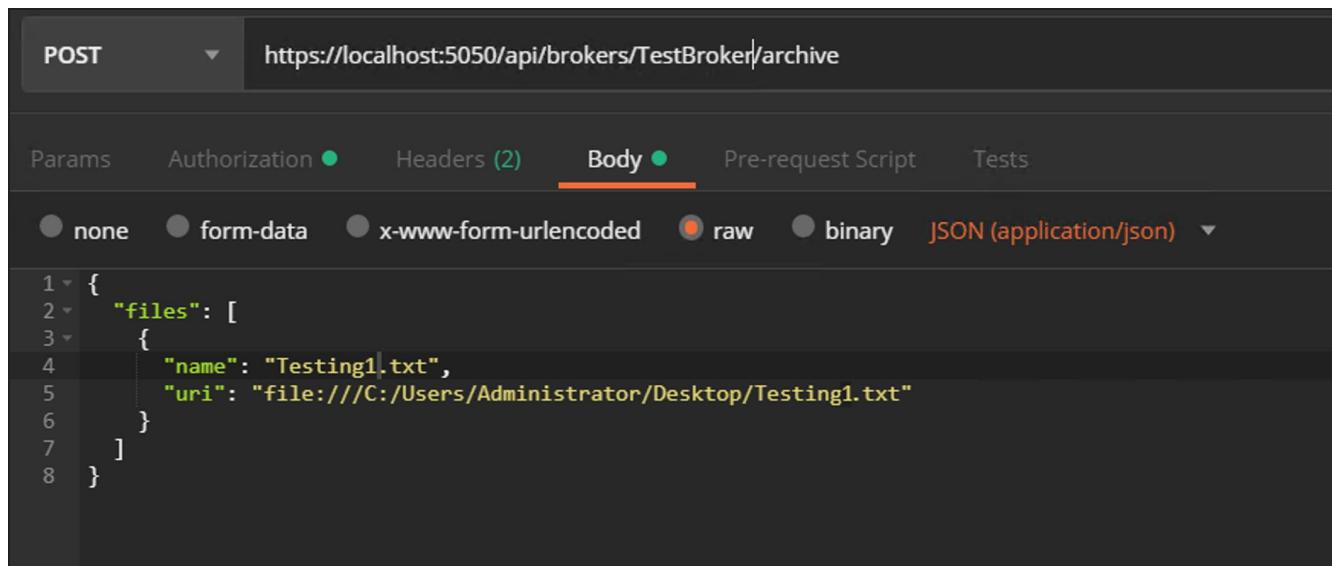


**Figure 60** An archive request example.

- a. If necessary, select **POST** from the drop-down menu next to the Request URL field.
- b. Enter the command `https://localhost:5050/api/brokers/{brokername}/archive` in the Request URL field. Use the namespace name configured in [Create a Device on page 39](#).
- c. The archive command requires the file name and URI. In the Body area, enter:

```
{  
  "files": [  
    {  
      "name": "[file name]",  
      "uri": "[full file uri]"  
    }  
  ]  
}
```

- d. Click **Send**. The response displays in the response pane.

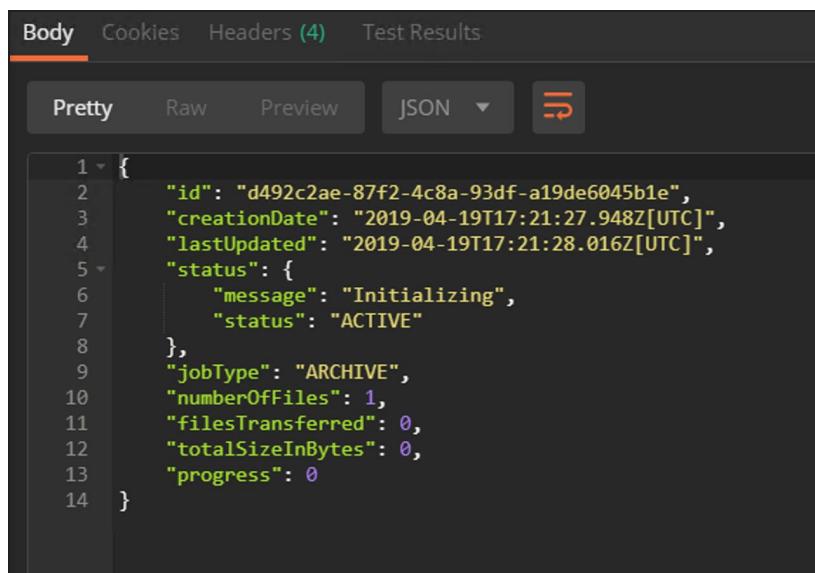

The screenshot shows the Postman interface with the 'Body' tab selected. The response is displayed in 'Pretty' format as a JSON object. The JSON structure includes fields for job ID, creation date, last updated date, status (message and status), job type, number of files, files transferred, total size in bytes, and progress. The status message is 'Initializing' and the status is 'ACTIVE'.

```
1 {  
2   "id": "d492c2ae-87f2-4c8a-93df-a19de6045b1e",  
3   "creationDate": "2019-04-19T17:21:27.948Z[UTC]",  
4   "lastUpdated": "2019-04-19T17:21:28.016Z[UTC]",  
5   "status": {  
6     "message": "Initializing",  
7     "status": "ACTIVE"  
8   },  
9   "jobType": "ARCHIVE",  
10  "numberOffiles": 1,  
11  "filesTransferred": 0,  
12  "totalSizeInBytes": 0,  
13  "progress": 0  
14 }
```

**Figure 61** The response from the archive request.

3. Confirm that the test file was successfully archived using either the Spectra Rio MediaEngine user interface or Postman.
  - Using the Spectra Rio MediaEngine user interface, select **Job Status** in the taskbar, and use the **Status** drop-down menu to select **Completed** jobs. If the archive was successful, the job displays here. If the job is not listed, use the **Status** drop-down menu to select **Failed** jobs. If the job is listed here, select the failed job to see additional information about why the job failed.
  - More information about why a job failed can be found in the Spectra Rio MediaEngine logs. See [Application Information and Reports on page 134](#) for more information.
  - Using Postman,
    - i. Open a new tab and select **GET** from the drop-down menu next to the Request URL field (see [Chapter 3 on page 33](#)).
    - ii. Enter the command `https://localhost:5050/api/jobs/{jobId}` in the Request URL field. For jobId, use the ID from the archive request response.
    - iii. Click **Send**. The response will list the Job ID, creation date, last updated date, and the status of the job.
4. Use the following steps to restore the small text file.
  - a. If necessary, select **POST** from the drop-down menu next to the Request URL field.
  - b. Enter the command `https://localhost:5050/api/brokers/{brokername}/restore` in the Request URL field. Use the namespace name configured in [Create a Device on page 39](#).
  - c. In the Body area, enter:

```
{  
  "files": [  
    {  
      "name": "[file name]",  
      "uri": "[full file uri]"  
    }  
  ]  
}
```

The file URI must be directed to a different location than the test file's original location. Or, if restoring to the original location, the file name must be changed.

- d. Click **Send**. The response displays in the response pane.

## Test Performance

To test Spectra Rio MediaEngine performance, you must first use the Dummy File Creator application to generate the files used in the testing the write/read speed of the Rio MediaEngine application. Download the Dummy File Creator from <http://www.mynikko.com/dummy/>.


1. Utilizing the Dummy File Creator, create 100 1 GB files.
  - a. If necessary, create a directory on the host system where you want to generate the test files.
  - b. In the directory created in Step a, create a new text file.
  - c. Using a text file editor, enter:
    - the directory name created in Step a.
    - the desired file name.
    - the binary value for 1 GB (1073741824).
    - and include the character zero after the file size value.

Use a new line for each file. Refer to the example below.

```
C:\Media\Test_Files\1.txt      1073741824      0  
C:\Media\Test_Files\2.txt      1073741824      0  
C:\Media\Test_Files\3.txt      1073741824      0  
C:\Media\Test_Files\4.txt      1073741824      0  
C:\Media\Test_Files\5.txt      1073741824      0  
...  
...
```


C:\Media\Test\_Files\100.txt 1073741824 0

- d. Using the Windows Start menu, or the icon on the desktop, launch the Dummy File Creator application.

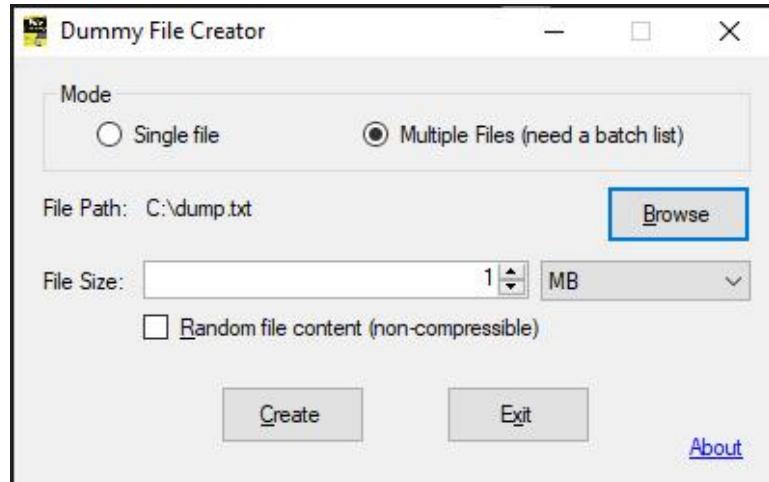

**Figure 62** The Dummy File Creator dialog box.

- e. Select **Multiple Files**.
- f. **Browse** to the location of the text file created in Step b on page 84.
- g. Use the data size drop-down menu to select **GB**.
- h. Click **Create**. The Dummy File Creator creates 100, 1 GB files.
2. Use the following steps to archive the files to the BlackPearl system using the Spectra Rio MediaEngine application.

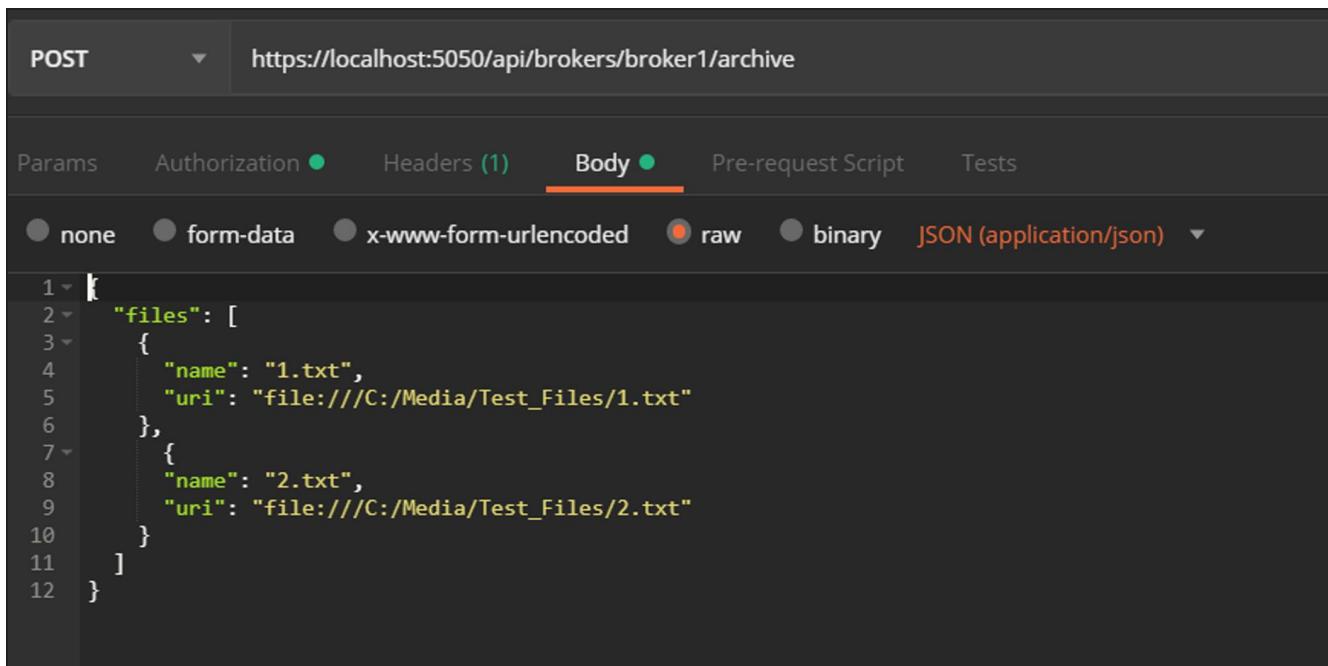

**Figure 63** A multiple file archive request example (only two files displayed).

- If necessary, select **POST** from the drop-down menu next to the Request URL field.
- Enter the command `https://localhost:5050/api/brokers/{brokername}/archive` in the Request URL field. Use the namespace name configured in [Create a Device](#) on page 39.
- In the Body area, enter the following:

```
{
  "files": [
    {
      "name": "[file name]",
      "uri": "[full file uri]"
    }
  ]
}
```

If you used the example file names given in [Step 1](#) on page 84, you can copy and paste the following:

```
{
  "files": [
    {"name": "1.txt",
     "uri": "file:///C:/Media/Test_Files/1.txt"},
```

```
{"name": "2.txt",
  "uri": "file:///C:/Media/Test_Files/2.txt"},

{"name": "3.txt",
  "uri": "file:///C:/Media/Test_Files/3.txt"},

{"name": "4.txt",
  "uri": "file:///C:/Media/Test_Files/4.txt"},

{"name": "5.txt",
  "uri": "file:///C:/Media/Test_Files/5.txt"},

{"name": "6.txt",
  "uri": "file:///C:/Media/Test_Files/6.txt"},

{"name": "7.txt",
  "uri": "file:///C:/Media/Test_Files/7.txt"},

{"name": "8.txt",
  "uri": "file:///C:/Media/Test_Files/8.txt"},

{"name": "9.txt",
  "uri": "file:///C:/Media/Test_Files/9.txt"},

{"name": "10.txt",
  "uri": "file:///C:/Media/Test_Files/10.txt"},

{"name": "11.txt",
  "uri": "file:///C:/Media/Test_Files/11.txt"},

{"name": "12.txt",
  "uri": "file:///C:/Media/Test_Files/12.txt"},

{"name": "13.txt",
  "uri": "file:///C:/Media/Test_Files/13.txt"},

{"name": "14.txt",
  "uri": "file:///C:/Media/Test_Files/14.txt"},

{"name": "15.txt",
  "uri": "file:///C:/Media/Test_Files/15.txt"},

{"name": "16.txt",
  "uri": "file:///C:/Media/Test_Files/16.txt"},

{"name": "17.txt",
```

```
  "uri": "file:///C:/Media/Test_Files/17.txt"},  
  {"name": "18.txt",  
    "uri": "file:///C:/Media/Test_Files/18.txt"},  
  {"name": "19.txt",  
    "uri": "file:///C:/Media/Test_Files/19.txt"},  
  {"name": "20.txt",  
    "uri": "file:///C:/Media/Test_Files/20.txt"},  
  {"name": "21.txt",  
    "uri": "file:///C:/Media/Test_Files/21.txt"},  
  {"name": "22.txt",  
    "uri": "file:///C:/Media/Test_Files/22.txt"},  
  {"name": "23.txt",  
    "uri": "file:///C:/Media/Test_Files/23.txt"},  
  {"name": "24.txt",  
    "uri": "file:///C:/Media/Test_Files/24.txt"},  
  {"name": "25.txt",  
    "uri": "file:///C:/Media/Test_Files/25.txt"},  
  {"name": "26.txt",  
    "uri": "file:///C:/Media/Test_Files/26.txt"},  
  {"name": "27.txt",  
    "uri": "file:///C:/Media/Test_Files/27.txt"},  
  {"name": "28.txt",  
    "uri": "file:///C:/Media/Test_Files/28.txt"},  
  {"name": "29.txt",  
    "uri": "file:///C:/Media/Test_Files/29.txt"},  
  {"name": "30.txt",  
    "uri": "file:///C:/Media/Test_Files/30.txt"},  
  {"name": "31.txt",  
    "uri": "file:///C:/Media/Test_Files/31.txt"},  
  {"name": "32.txt",  
    "uri": "file:///C:/Media/Test_Files/32.txt"},
```

---

```
{"name": "33.txt",
  "uri": "file:///C:/Media/Test_Files/33.txt"},

{"name": "34.txt",
  "uri": "file:///C:/Media/Test_Files/34.txt"},

{"name": "35.txt",
  "uri": "file:///C:/Media/Test_Files/35.txt"},

{"name": "36.txt",
  "uri": "file:///C:/Media/Test_Files/36.txt"},

{"name": "37.txt",
  "uri": "file:///C:/Media/Test_Files/37.txt"},

{"name": "38.txt",
  "uri": "file:///C:/Media/Test_Files/38.txt"},

{"name": "39.txt",
  "uri": "file:///C:/Media/Test_Files/39.txt"},

{"name": "40.txt",
  "uri": "file:///C:/Media/Test_Files/40.txt"},

{"name": "41.txt",
  "uri": "file:///C:/Media/Test_Files/41.txt"},

{"name": "42.txt",
  "uri": "file:///C:/Media/Test_Files/42.txt"},

{"name": "43.txt",
  "uri": "file:///C:/Media/Test_Files/43.txt"},

{"name": "44.txt",
  "uri": "file:///C:/Media/Test_Files/44.txt"},

{"name": "45.txt",
  "uri": "file:///C:/Media/Test_Files/45.txt"},

{"name": "46.txt",
  "uri": "file:///C:/Media/Test_Files/46.txt"},

{"name": "47.txt",
  "uri": "file:///C:/Media/Test_Files/47.txt"},

{"name": "48.txt",
```

```
  "uri": "file:///C:/Media/Test_Files/48.txt"},  
  {"name": "49.txt",  
    "uri": "file:///C:/Media/Test_Files/49.txt"},  
  {"name": "50.txt",  
    "uri": "file:///C:/Media/Test_Files/50.txt"},  
  {"name": "51.txt",  
    "uri": "file:///C:/Media/Test_Files/51.txt"},  
  {"name": "52.txt",  
    "uri": "file:///C:/Media/Test_Files/52.txt"},  
  {"name": "53.txt",  
    "uri": "file:///C:/Media/Test_Files/53.txt"},  
  {"name": "54.txt",  
    "uri": "file:///C:/Media/Test_Files/54.txt"},  
  {"name": "55.txt",  
    "uri": "file:///C:/Media/Test_Files/55.txt"},  
  {"name": "56.txt",  
    "uri": "file:///C:/Media/Test_Files/56.txt"},  
  {"name": "57.txt",  
    "uri": "file:///C:/Media/Test_Files/57.txt"},  
  {"name": "58.txt",  
    "uri": "file:///C:/Media/Test_Files/58.txt"},  
  {"name": "59.txt",  
    "uri": "file:///C:/Media/Test_Files/59.txt"},  
  {"name": "60.txt",  
    "uri": "file:///C:/Media/Test_Files/60.txt"},  
  {"name": "61.txt",  
    "uri": "file:///C:/Media/Test_Files/61.txt"},  
  {"name": "62.txt",  
    "uri": "file:///C:/Media/Test_Files/62.txt"},  
  {"name": "63.txt",  
    "uri": "file:///C:/Media/Test_Files/63.txt"},
```

---

```
{"name": "64.txt",
  "uri": "file:///C:/Media/Test_Files/64.txt"},

{"name": "65.txt",
  "uri": "file:///C:/Media/Test_Files/65.txt"},

{"name": "66.txt",
  "uri": "file:///C:/Media/Test_Files/66.txt"},

{"name": "67.txt",
  "uri": "file:///C:/Media/Test_Files/67.txt"},

{"name": "68.txt",
  "uri": "file:///C:/Media/Test_Files/68.txt"},

{"name": "69.txt",
  "uri": "file:///C:/Media/Test_Files/69.txt"},

{"name": "70.txt",
  "uri": "file:///C:/Media/Test_Files/70.txt"},

{"name": "71.txt",
  "uri": "file:///C:/Media/Test_Files/71.txt"},

{"name": "72.txt",
  "uri": "file:///C:/Media/Test_Files/72.txt"},

{"name": "73.txt",
  "uri": "file:///C:/Media/Test_Files/73.txt"},

{"name": "74.txt",
  "uri": "file:///C:/Media/Test_Files/74.txt"},

{"name": "75.txt",
  "uri": "file:///C:/Media/Test_Files/75.txt"},

{"name": "76.txt",
  "uri": "file:///C:/Media/Test_Files/76.txt"},

{"name": "77.txt",
  "uri": "file:///C:/Media/Test_Files/77.txt"},

{"name": "78.txt",
  "uri": "file:///C:/Media/Test_Files/78.txt"},

{"name": "79.txt",
```

```
  "uri": "file:///C:/Media/Test_Files/79.txt"},  
  {"name": "80.txt",  
    "uri": "file:///C:/Media/Test_Files/80.txt"},  
  {"name": "81.txt",  
    "uri": "file:///C:/Media/Test_Files/81.txt"},  
  {"name": "82.txt",  
    "uri": "file:///C:/Media/Test_Files/82.txt"},  
  {"name": "83.txt",  
    "uri": "file:///C:/Media/Test_Files/83.txt"},  
  {"name": "84.txt",  
    "uri": "file:///C:/Media/Test_Files/84.txt"},  
  {"name": "85.txt",  
    "uri": "file:///C:/Media/Test_Files/85.txt"},  
  {"name": "86.txt",  
    "uri": "file:///C:/Media/Test_Files/86.txt"},  
  {"name": "87.txt",  
    "uri": "file:///C:/Media/Test_Files/87.txt"},  
  {"name": "88.txt",  
    "uri": "file:///C:/Media/Test_Files/88.txt"},  
  {"name": "89.txt",  
    "uri": "file:///C:/Media/Test_Files/89.txt"},  
  {"name": "90.txt",  
    "uri": "file:///C:/Media/Test_Files/90.txt"},  
  {"name": "91.txt",  
    "uri": "file:///C:/Media/Test_Files/91.txt"},  
  {"name": "92.txt",  
    "uri": "file:///C:/Media/Test_Files/92.txt"},  
  {"name": "93.txt",  
    "uri": "file:///C:/Media/Test_Files/93.txt"},  
  {"name": "94.txt",  
    "uri": "file:///C:/Media/Test_Files/94.txt"},
```

```
{"name": "95.txt",
  "uri": "file:///C:/Media/Test_Files/95.txt"},

{"name": "96.txt",
  "uri": "file:///C:/Media/Test_Files/96.txt"},

{"name": "97.txt",
  "uri": "file:///C:/Media/Test_Files/97.txt"},

{"name": "98.txt",
  "uri": "file:///C:/Media/Test_Files/98.txt"},

{"name": "99.txt",
  "uri": "file:///C:/Media/Test_Files/99.txt"},

{"name": "100.txt",
  "uri": "file:///C:/Media/Test_Files/100.txt"}]
```

- d.** Click **Send**. The response displays in the response pane.
- 3.** Confirm that the test files were successfully archived using either the Spectra Rio MediaEngine user interface or Postman.
- Using the Spectra Rio MediaEngine user interface, select **Job Status** in the taskbar, and use the **Status** drop-down menu to select **Completed** jobs. If the archive was successful, the job displays here. If the job is not listed, use the **Status** drop-down menu to select **Failed** jobs. If the job is listed here, select the failed job to see additional information about why the job failed.
  - More information about why a job failed can be found in the Spectra Rio MediaEngine logs. See [Application Information and Reports](#) on page 134 for more information.
  - Using Postman,
    - i. Select **GET** from the drop-down menu next to the Request URL field.
    - ii. Enter the command `https://localhost:5050/api/jobs/{jobId}` in the Request URL field. For jobId, use the ID from the archive request response.
    - iii. Click **Send**. The response will list the Job ID, creation date, last updated date, and the status of the job.
- 4.** Move the dummy files to a different directory. This allows you to use the body text from Step **c** on page 86 for the restore command.
- 5.** Use the following steps to restore the files.

- a. If necessary, select **POST** from the drop-down menu next to the Request URL field.
  - b. Enter the command `https://localhost:5050/api/brokers/{brokername}/restore` in the Request URL field. Use the namespace name configured in [Create a Device on page 39](#).
  - c. In the Body area, enter the same text used for Step c on page 86.
  - d. Click **Send**. The response displays in the response pane.
6. Log into the BlackPearl system and download a Statistic Log Set to view the read/write performance statistics. See 'Log Sets' in the [\*BlackPearl Object Gateway User Guide\*](#) for instructions.
7. Delete all temporary files and directories used for testing.

# CHAPTER 4 - ARCHIVE AND RESTORE USING THE SPECTRA RIO MEDIAENGINE APPLICATION


This chapter describes how to archive and restore data, and manage jobs using the Spectra Rio MediaEngine application.

---

<b>Archive Files</b>	<b>96</b>
<b>Browse and Restore Objects</b>	<b>98</b>
Restore a Single Object	100
Restore Multiple Objects	101
Restore All Objects	102
View Object Details	103
View Object Metadata	105
<b>Search and Restore Objects</b>	<b>106</b>
Search for Objects	106
Restore Objects	108
Download Object Report	109
<b>Manage Jobs</b>	<b>110</b>
View Job Status	110
View Active Job Transfer Information	110
Change Job Priority	111
Cancel an Active Job	112
Restart a Job	113
View Detailed Job Information	114
View Job Groups	115
View All Jobs in a Job Group	116


# ARCHIVE FILES

The Rio MediaEngine application supports archiving files using the Rio MediaEngine user interface. Use the instructions in this section to create a new archive job.

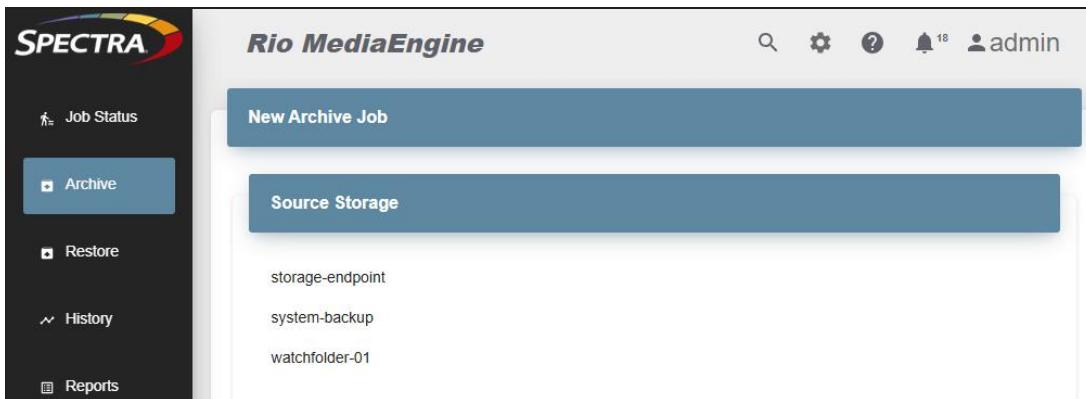

The New Archive Job screen.

1. On the task bar, click **Archive**. The New Archive Job screen displays.
2. Click the name of the **Source Storage** from which you want to archive files. The screen updates to show the contents of the source storage.

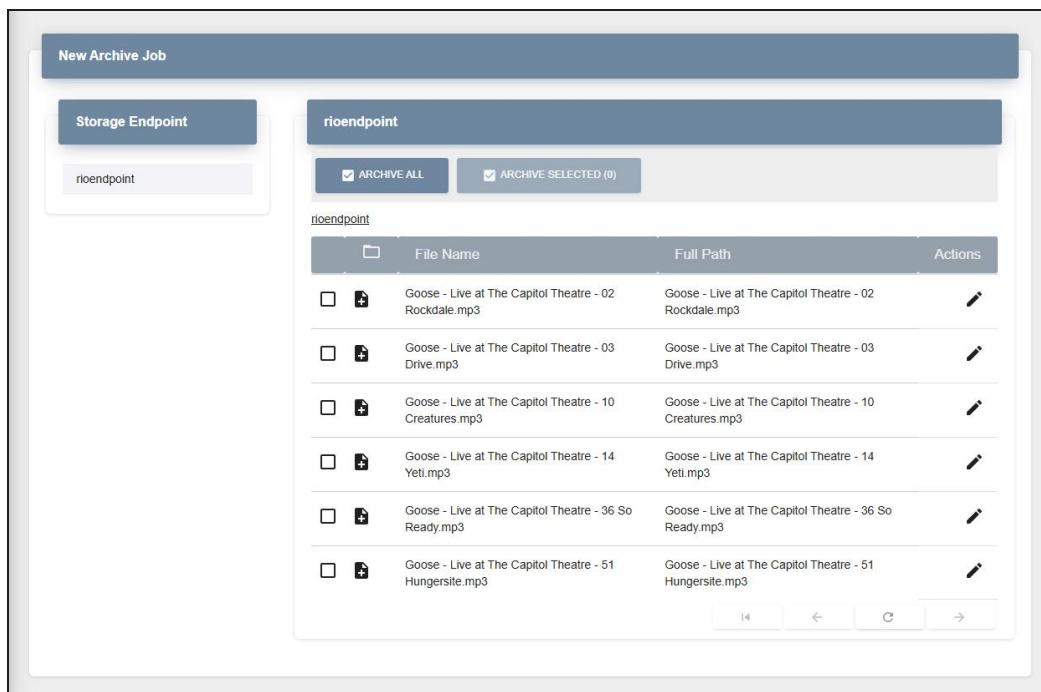

**Figure 64** The New Archive Job screen.

3. Click **Archive All** to archive all objects, or select the objects you want to archive and click **Archive Selected**. The Archive Objects screen displays.

The screenshot shows the 'Archive Objects' dialog box. At the top, it says 'Archive Objects' and has a close button 'X'. Below that is a 'Job Name' field containing 'Archive rioendpoint'. A 'To Namespace' dropdown menu is shown. A 'Prefix' input field contains a forward slash ('/'). A note below it says 'Optional string prepended to object names; end with "/" for directory'. There is a checkbox for 'New Files Only'. The 'Job Metadata' section has a 'Key' input field and a 'Value' input field, with a '+' button to add more pairs. At the bottom is a 'SUBMIT' button.

**Figure 65** The Archive Objects screen.


4. If desired, change the default **Job Name**.
5. Using the **To Namespace** drop-down menu, select the destination namespace for the job.
6. If desired, enter a **Prefix** to prepend a string to all object names in the job.
  - To prepend object names directly, enter a prefix.
  - To group all objects into a new subfolder, end the string with the forward slash ( / ) character.
7. Select **New Files Only** to only archive files that are not already in the namespace.
8. If desired enter one or more metadata **Key** and **Value** combinations. All files included in the job are tagged with entered metadata.
9. Click **Submit**.

**Note:** If you select a folder to archive, the application generates a Bulk Archive job, which archives all sub-folders and files contained in the selected folder.

# BROWSE AND RESTORE OBJECTS

If desired, you can browse objects archived by the Rio MediaEngine application, as well as restore files returned by a search.

1. On the task bar, select **Restore**. The Restore screen displays.

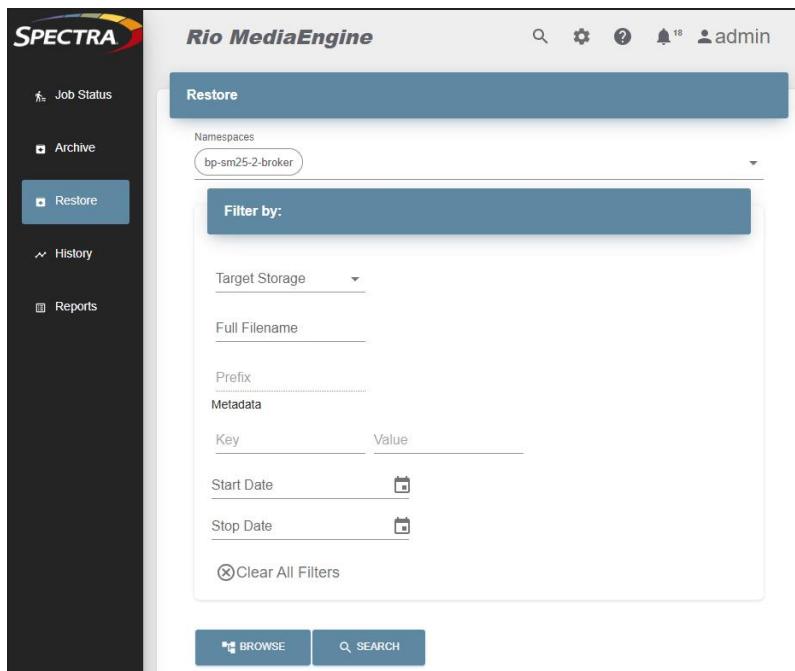

**Figure 66** The Browse / Restore screen.

2. Using the **Namespace** drop-down menu, select the namespace for which you want to view objects.
3. To narrow your search, do any of the following:
  - To display the objects in a specific bucket, use the **Target Storage** drop-down menu to select a target storage configured in the namespace.
  - To locate a specific file, enter the **Full Filename**.
  - To locate objects by starting prefix, enter the filename **Prefix**. The prefix name is case sensitive.
  - To locate files by metadata, enter the **Metadata** information.

**Note:** The Rio MediaEngine application accepts an asterisk (\*), or a question mark (?) as wild cards.

- Click **Start Date** to display a calendar allowing you to select a start date for the object browser.
- Click **Stop Date** to display a calendar allowing you to select a stop date for the object browser.

**Notes:** • The current date is automatically selected as the stop date.

4. Click **Search** or **Browse** to update the list displayed on the object browser screen.
- **Browse** returns results in a directory hierarchy format.
  - **Search** returns results in a flat file format.

Filename	Namespace	Metadata	File Size	Creation Date	Detail
RioBroker-backup-2025-10-09-10-55-31.zip	bp-sm25-2-broker		47.9 kB	10/09/2025 9:55:36 AM	<input type="checkbox"/>
RioBroker-backup-2025-10-09-23-00-09.zip	bp-sm25-2-broker		54.7 MiB	10/09/2025 10:00:36 PM	<input type="checkbox"/>
RioBroker-backup-2025-10-10-23-00-09.zip	bp-sm25-2-broker		54.7 MiB	10/10/2025 10:00:48 PM	<input type="checkbox"/>
RioBroker-backup-2025-10-11-23-00-09.zip	bp-sm25-2-broker		54.7 MiB	10/11/2025 10:00:35 PM	<input type="checkbox"/>
RioBroker-backup-2025-10-12-23-00-10.zip	bp-sm25-2-broker		54.8 MiB	10/12/2025 10:00:38 PM	<input type="checkbox"/>


**Figure 67** The Restore screen populated with objects from the selected namespace.

- Use the **Previous**, **Next**, **Beginning**, and **End** buttons to navigate the object list.
- Use the **Refresh** button to update the list of object.
- Use the **Rows** drop-down menu to set how many object are displayed at one time.

## Restore a Single Object

The Rio MediaEngine application provides a feature to restore a single object.

1. Select the object you want to restore and click the **Restore Selected** button. The Restore dialog box displays.

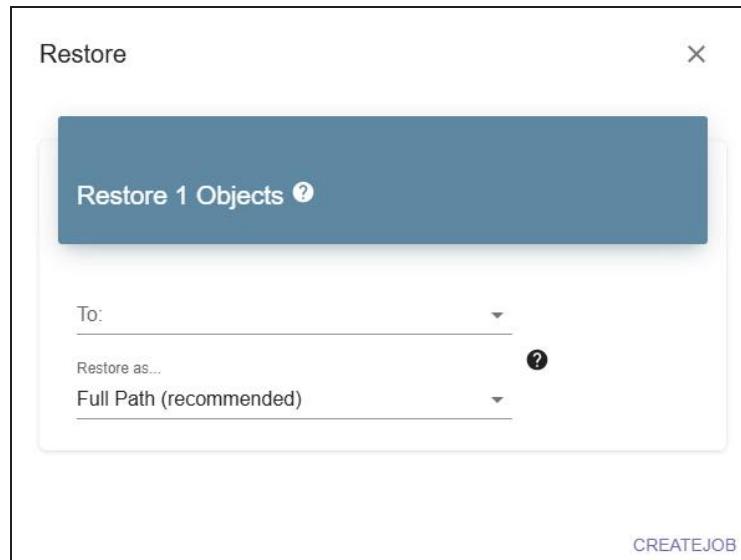


**Figure 68** The Restore dialog box for restoring a single file.

2. Using the **To:** drop-down menu, select one or more source target(s) where you want to restore the object.
3. Using the **Restore As...** drop-down menu, select between **Full Path**, **Filename**, **Prefix**, and **Replace**.
  - **Full Path** restores the full path from the object name.
  - **Filename** removes the path.
  - **Prefix** allows you to add a prefix string to the object name.
  - **Replace** allows you to change the existing string to a new string of your choice.
4. Click **Create Job**.

## Restore Multiple Objects

The Rio MediaEngine application allows you to download multiple objects returned by a search.

1. After a search completes, select each object you want to restore.
2. Click **Restore Selected**. The Restore dialog box displays.

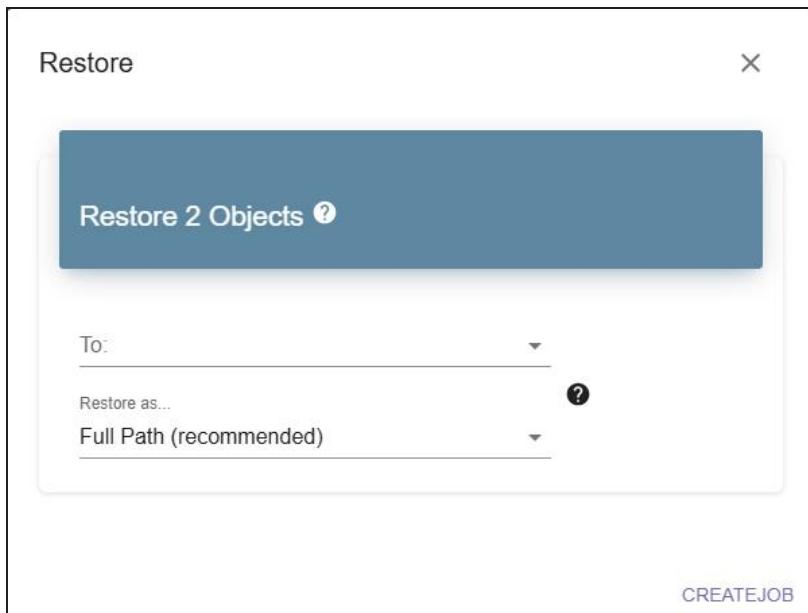


**Figure 69** The Restore dialog box for restoring multiple files.

3. Using the **To:** drop-down menu, select one or more source storage(s) where you want to restore the objects.
4. Using the **Restore As...** drop-down menu, select between **Full Path**, **Filename**, **Prefix**, and **Replace**.
  - **Full Path** restores the full path from the object name.
  - **Filename** removes the path.
  - **Prefix** allows you to add a prefix string to the object name.
  - **Replace** allows you to change the existing string to a new string of your choice.
5. Click **Create Job**.

## Restore All Objects

The Rio MediaEngine application provides a “one-click” feature to restore all objects found during a search.

1. After a search completes, click **Restore All**. The Restore dialog box displays.

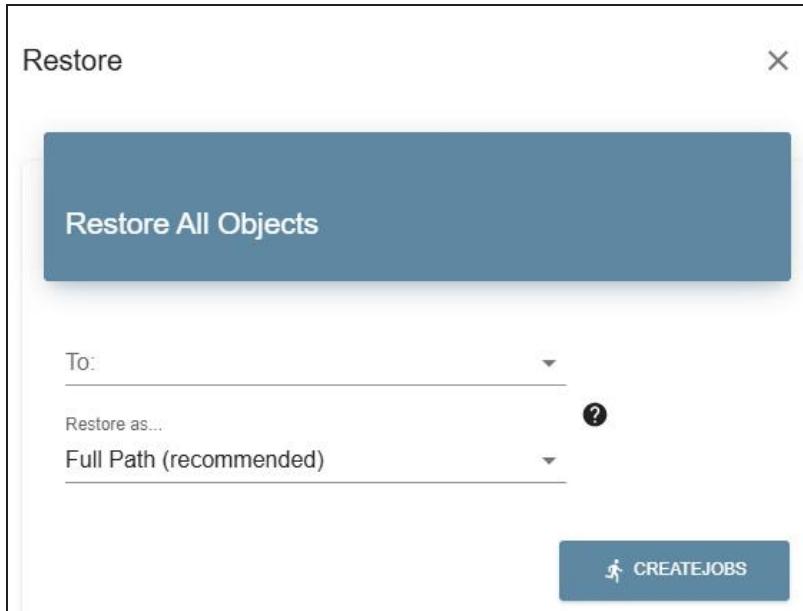

**Figure 70** The Restore dialog box for restoring all files.

2. Using the **To:** drop-down menu, select one or more source storage(s) where you want to restore the objects.
3. Using the **Restore As...** drop-down menu, select between **Full Path**, **Filename**, **Prefix**, and **Replace**.
  - **Full Path** restores the full path from the object name.
  - **Filename** removes the path.
  - **Prefix** allows you to add a prefix string to the object name.
  - **Replace** allows you to change the existing string to a new string of your choice.
4. Click **Create Job**.

## View Object Details

After configuring the parameters for browsing the namespace objects, click the View Details button on the row of the object for which you want to display detailed information.

The screenshot shows the Rio MediaEngine interface. On the left is a sidebar with 'Job Status', 'Archive' (selected), 'Restore' (highlighted in blue), 'History', and 'Reports'. The main area is titled 'Browse / Restore' and shows a table of objects in the 'VAIL-NAMESPACE (5)' bucket. The table has columns for 'Filename', 'Namespace', 'Bucket', 'Metadata', 'File Size', and 'Creation Date'. The 'Detail' button is located in the header of the table. A red box highlights this button. The table shows five rows of data, with the second row having a checked checkbox in the first column.

Filename	Namespace	Bucket	Metadata	File Size	Creation Date	Detail
renametest	vail-namespace	riobucketname		1 MiB	07/28/2025 10:51:38 AM	<input type="checkbox"/>
<input checked="" type="checkbox"/> PXL_20241212_155626741.jpg	vail-namespace	riobucketname		2.5 MiB	07/28/2025 10:48:24 AM	<input type="checkbox"/>
<input type="checkbox"/> PXL_20241212_155611433.jpg	vail-namespace	riobucketname		2.8 MiB	07/28/2025 10:48:26 AM	<input type="checkbox"/>
<input type="checkbox"/> PXL_20241212_155608968.jpg	vail-namespace	riobucketname		2.7 MiB	07/28/2025 10:48:28 AM	<input type="checkbox"/>
<input type="checkbox"/> PXL_20241212_155603274.jpg	vail-namespace	riobucketname		2.4 MiB	07/28/2025 10:48:28 AM	<input type="checkbox"/>

**Figure 71** The Browse / Restore screen View Details button.

The details window for the object displays.

The screenshot shows the 'Object Detail' screen. It lists various metadata fields for an object named 'RioBroker-backup-2025-10-09-10-55-31.zip'. The fields include Object Name, Namespace, Target Storage, Copy Date, Creation Date, Object Size, Internal Checksum, Metadata, TAPE, and specific location and type details. The 'Object Name' field is highlighted.

Object Name	RioBroker-backup-2025-10-09-10-55-31.zip
Namespace	bp-sm25-2-broker
Target Storage	bp-sm25-2-agent
Copy Date	10/09/2025 9:55:36 AM
Creation Date	10/09/2025 9:55:36 AM
Object Size	47.9 KiB
Internal Checksum	52c35690c5c2ab879422a27dd695d224
Metadata	
TAPE	
-- locationType:	tape
-- metadata	
-- -- serialNumber:	HP-D140314454
-- -- type:	LTO5

**Figure 72** The Object Details screen.

Use the table below for information on the details displayed for a selected object.

Category	Description
<b>Object Name</b>	The filename of the object.
<b>Namespace</b>	The namespace used to control the placement of the object.
<b>Target Storage: Copy Date</b>	The target storage containing the object and file creation date and time.
<b>Creation Date</b>	The file creation date and time.
<b>Object Size</b>	The size of the object.
<b>Internal Checksum</b>	The internal checksum, if any, used to verify the file during archives and restores.
<b>Metadata</b>	The metadata the Rio MediaEngine assigned to the file. Click the <b>double-arrow</b> icon (see Chapter 4 on page 95) to expand the list of metadata information.

Information about the physical location(s) of the object is also included in the Objects Detail screen.

**Note:** Not all of the fields below display for each type of location:

Category	Description
<b>Barcode</b>	The barcode of the tape cartridge where the object physically resides.
<b>PartitionID</b>	The partition ID of the tape partition in the library.
<b>ID</b>	The instance ID.
<b>State</b>	The current state of the tape cartridge where the object physically resides.
<b>Location Type</b>	Tape, disk, or Spectra Vail storage.
<b>Metadata</b>	The metadata information for the object on the location endpoint.

**Note:** If the object exists on multiple tape cartridges, information about each tape cartridge displays.

## View Object Metadata

After configuring the parameters for browsing the namespace objects, click the **Tags** button on the row of the object for which you want to display metadata. The screen refreshes to show the metadata tags for the object.

Bucket	Metadata
music	
music	▼ music: goose
music	
music	
music	▼ Tags

**Figure 73** The Tags button.

Click the **Tags** button again to stop displaying metadata for the object.

# SEARCH AND RESTORE OBJECTS

If desired, you can search for files processed by the Spectra Rio MediaEngine application instead of searching for them in a BlackPearl system or your MAM or PAM application. After the search completes, you can download a report of the file or the file(s) returned by the search.

## Search for Objects

1. On the toolbar, click **Search** (magnifying glass icon). The Object Search dialog box displays.

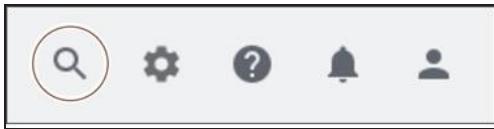


Figure 74 The toolbar.

2. Using the **Namespaces** drop-down menu, select one or more namespace(s) to search.

**Note:** To search all namespaces, select **Search All Namespaces**.

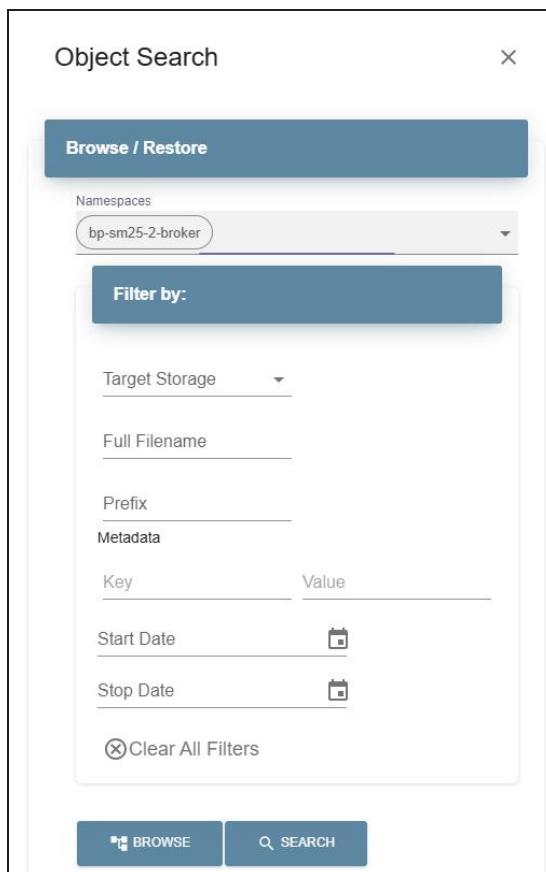


Figure 75 The Object Search dialog box.

3. To narrow your search, do one of the following:

- To locate a specific file, enter the **Full Filename** of the file.
- To locate files by starting prefix, enter the **Filename Prefix**.
- To locate files by metadata, enter the **Metadata** information. The Metadata search value can either be a string to match a value, or a key/name pair.

**Note:** The Rio MediaEngine application accepts an asterisk (\*), or a question mark (?) as wild cards.

- To restrict your search to a specific date range, use the **Start Date** and **Stop Date** calendar menus.


KCNAMESPACE1 (5)						
<input type="checkbox"/> RESTORE ALL (6)	<input checked="" type="checkbox"/> RESTORE SELECTED (0)	<input type="button"/> DOWNLOAD REPORT	<input type="checkbox"/> CLEAR ALL			
Filename	Namespace	Bucket	Metadata	File Size	Creation Date	Detail
<input type="checkbox"/> Goose - Live at The Capitol Theatre - 51 Hungersite.mp3	kcnamespace1	music		46.7 MIB	08/15/2025 1:41:56 PM	<input type="checkbox"/>
<input type="checkbox"/> Goose - Live at The Capitol Theatre - 36 So Ready.mp3	kcnamespace1	music	<input type="checkbox"/> music: goose	30 MIB	08/15/2025 2:15:42 PM	<input type="checkbox"/>
<input type="checkbox"/> Goose - Live at The Capitol Theatre - 14 Yeti.mp3	kcnamespace1	music		27.2 MIB	08/15/2025 1:24:17 PM	<input type="checkbox"/>
<input type="checkbox"/> Goose - Live at The Capitol Theatre - 10 Creatures.mp3	kcnamespace1	music		31.6 MIB	08/15/2025 1:24:17 PM	<input type="checkbox"/>
<input type="checkbox"/> Goose - Live at The Capitol Theatre - 03 Drive.mp3	kcnamespace1	music	<input type="checkbox"/> Tags	72 MIB	08/15/2025 2:07:19 PM	<input type="checkbox"/>

**Figure 76** The Object Search dialog box with search results.

4. Click **Search** to view flat files or **Browse** to view the directory hierarchy. The results display.

- Use the **Previous**, **Next**, **Beginning**, and **End** buttons to navigate the object list.
- Use the **Refresh** button to update the list of objects.
- Use the **Rows** drop-down menu to set how many objects are displayed at one time.

## Restore Objects

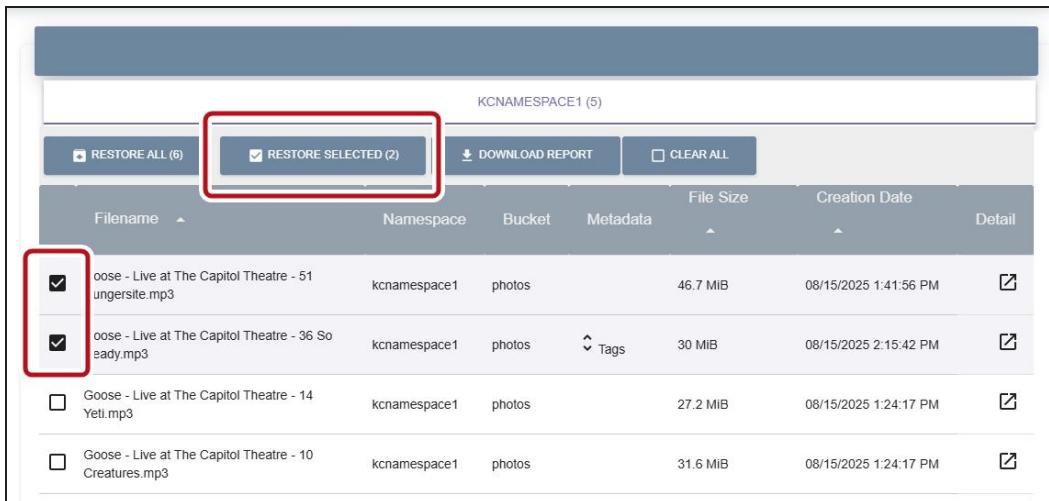

The screenshot shows a table of objects in the 'KCNAMESPACE1 (5)' bucket. The columns are: Filename, Namespace, Bucket, Metadata, File Size, Creation Date, and Detail. The 'Filename' column is sorted. The 'Metadata' column has a 'Tags' dropdown. The 'File Size' and 'Creation Date' columns are sorted. The 'Detail' column contains edit icons. The first two rows have checkboxes checked, and the 'RESTORE SELECTED (2)' button is highlighted with a red box. The 'RESTORE ALL (6)' and 'CLEAR ALL' buttons are also visible.

Filename	Namespace	Bucket	Metadata	File Size	Creation Date	Detail
oose - Live at The Capitol Theatre - 51 ungersite.mp3	Kcnnamespace1	photos		46.7 MiB	08/15/2025 1:41:56 PM	
oose - Live at The Capitol Theatre - 36 So eady.mp3	Kcnnamespace1	photos	Tags	30 MiB	08/15/2025 2:15:42 PM	
Goose - Live at The Capitol Theatre - 14 Yeti.mp3	Kcnnamespace1	photos		27.2 MiB	08/15/2025 1:24:17 PM	
Goose - Live at The Capitol Theatre - 10 Creatures.mp3	Kcnnamespace1	photos		31.6 MiB	08/15/2025 1:24:17 PM	

**Figure 77** The Restore Selected button.

1. Select the row of the object(s) you want to restore, then click **Restore Selected**, or click **Restore All**. The Restore dialog box displays.



**Figure 78** The Restore dialog box.

2. Using the **To:** drop-down menu, select one or more source storage(s) where you want to restore the object.


3. Using the **Restore As...** drop-down menu, select between **Full Path**, **Filename**, **Prefix**, and **Replace**.

- **Full Path** restores the full path from the object name.
- **Filename** removes the path.
- **Prefix** allows you to add a prefix string to the object name.
- **Replace** allows you to change the existing string to a new string of your choice.

4. Click **Create Job**.

## Download Object Report

After you have performed an object search, you can download a report of the objects in CSV or JSON format.

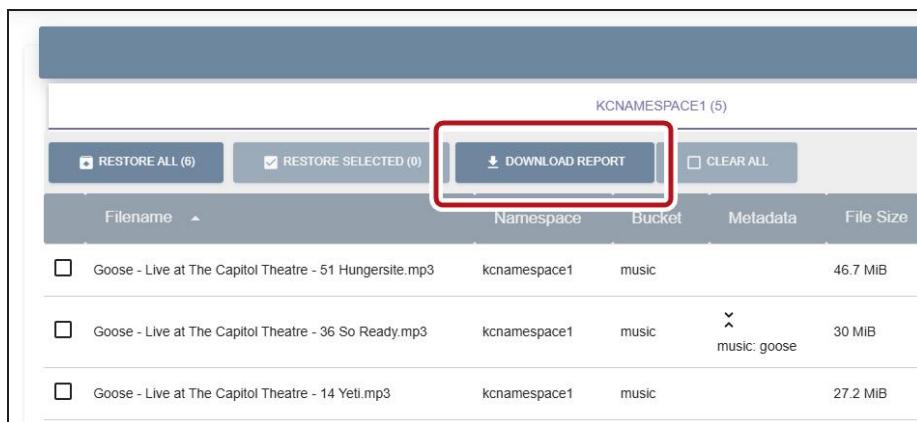


The screenshot shows a search results page for 'KCNAMESPACE1 (5)'. At the top, there are buttons for 'RESTORE ALL (6)' and 'RESTORE SELECTED (0)'. Below these are buttons for 'CLEAR ALL' and 'DOWNLOAD REPORT', which is highlighted with a red box. The results table has columns for 'Filename', 'Namespace', 'Bucket', 'Metadata', and 'File Size'. The first three rows are standard entries, while the fourth row shows a 'music: goose' tag with a delete icon.

Filename	Namespace	Bucket	Metadata	File Size
Goose - Live at The Capitol Theatre - 51 Hungersite.mp3	kcnamespace1	music		46.7 MiB
Goose - Live at The Capitol Theatre - 36 So Ready.mp3	kcnamespace1	music		30 MiB
Goose - Live at The Capitol Theatre - 14 Yeti.mp3	kcnamespace1	music	music: goose	27.2 MiB

**Figure 79** The Download Report button.

1. In the Search dialog box, click **Download Report**. The Download Reports screen displays.

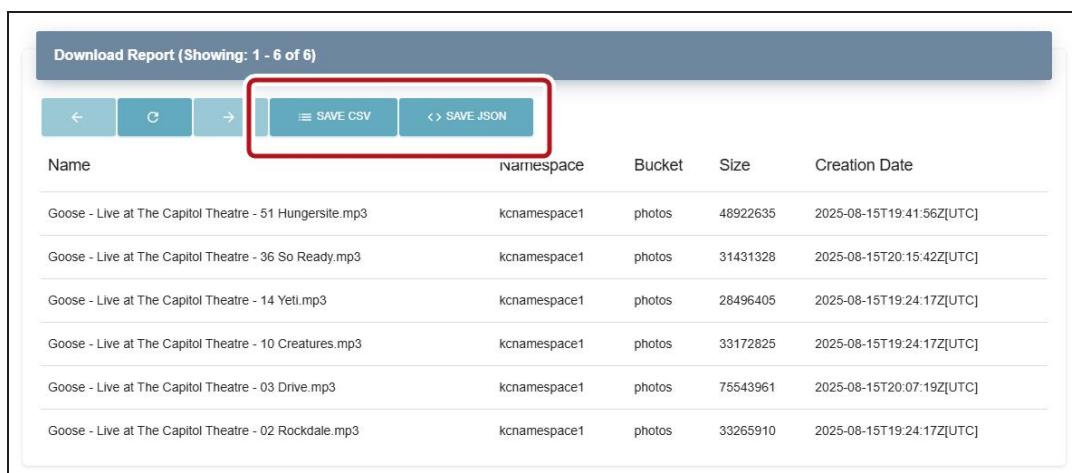

The screenshot shows the 'Download Report (Showing: 1 - 6 of 6)' screen. At the top, there are navigation buttons for '←', 'C', '→', and 'SAVE CSV' and 'SAVE JSON' buttons, which are highlighted with a red box. The main area is a table with columns for 'Name', 'Namespace', 'Bucket', 'Size', and 'Creation Date'. The table lists six mp3 files from the 'photos' bucket in the 'kcnamespace1' namespace.

Name	Namespace	Bucket	Size	Creation Date
Goose - Live at The Capitol Theatre - 51 Hungersite.mp3	kcnamespace1	photos	48922635	2025-08-15T19:41:56Z[UTC]
Goose - Live at The Capitol Theatre - 36 So Ready.mp3	kcnamespace1	photos	31431328	2025-08-15T20:15:42Z[UTC]
Goose - Live at The Capitol Theatre - 14 Yeti.mp3	kcnamespace1	photos	28496405	2025-08-15T19:24:17Z[UTC]
Goose - Live at The Capitol Theatre - 10 Creatures.mp3	kcnamespace1	photos	33172825	2025-08-15T19:24:17Z[UTC]
Goose - Live at The Capitol Theatre - 03 Drive.mp3	kcnamespace1	photos	75543961	2025-08-15T20:07:19Z[UTC]
Goose - Live at The Capitol Theatre - 02 Rockdale.mp3	kcnamespace1	photos	33265910	2025-08-15T19:24:17Z[UTC]

**Figure 80** The Download Reports screen.

2. Click **Save CSV** or **Save JSON** to download the report in the specified format.

# MANAGE JOBS


The Job screen provides the current status of all jobs processed by the application, as well as the ability to cancel an in-progress job, and to restart a canceled job.

## View Job Status

If desired, you can use the Spectra Rio MediaEngine application to view the job status of active, completed, and canceled jobs. From the Jobs screen you can change a job priority, cancel a job, and view detailed information about job, and files in the job.

**Note:** In a multi-cluster configuration, all jobs display the master node as the owner of the file.

1. On the task bar, click **Job Status**. The Jobs screen displays.

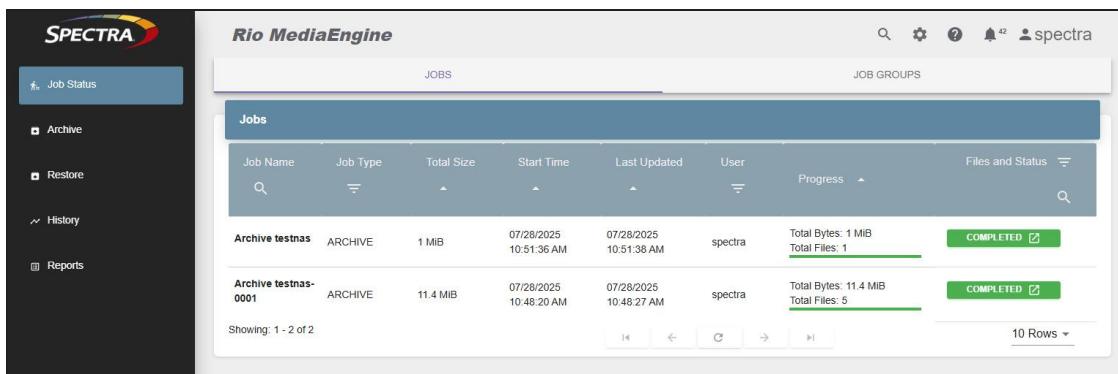

The screenshot shows the Rio MediaEngine interface with the 'Jobs' screen selected. The left sidebar has 'Job Status' as the active tab, and the main area displays a table of jobs. The table columns are: Job Name, Job Type, Total Size, Start Time, Last Updated, User, Progress, and Files and Status. Two rows are visible:

- Archive testnas** ARCHIVE 1 MiB 07/28/2025 10:51:36 AM 07/28/2025 10:51:38 AM spectra Total Bytes: 1 MiB Total Files: 1 COMPLETED
- Archive testnas-0001** ARCHIVE 11.4 MiB 07/28/2025 10:48:20 AM 07/28/2025 10:48:27 AM spectra Total Bytes: 11.4 MiB Total Files: 5 COMPLETED


At the bottom, it says 'Showing: 1 - 2 of 2' and '10 Rows'.

**Figure 81** The Jobs screen.

2. Click **Files and Status**, and then click **Completed**, **Canceled**, **Active**, or **Failed** to view the status of jobs in each category.

## View Active Job Transfer Information

The Rio MediaEngine Jobs screen also displays the amount of data transferred and percentage complete for each active job, and the current data transfer speed.

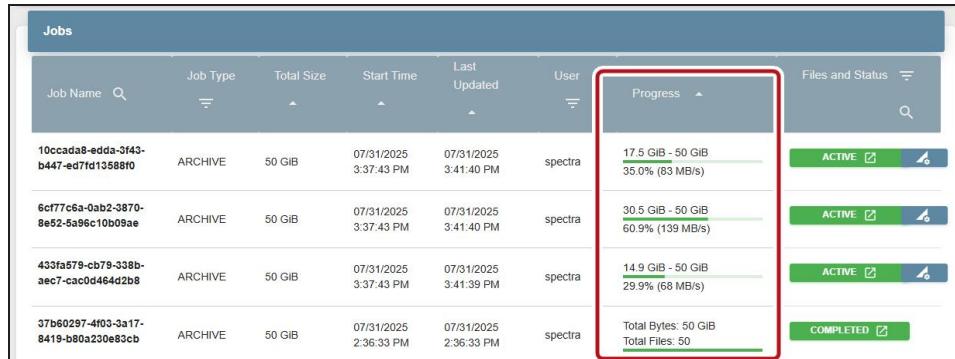

The screenshot shows the Rio MediaEngine Jobs screen with the 'Progress' column highlighted for the first job in the list. The table columns are: Job Name, Job Type, Total Size, Start Time, Last Updated, User, Progress, and Files and Status. The first job is highlighted:

- 10ccada8-edda-3f43-b447-ed7fd13588b0** ARCHIVE 50 GiB 07/31/2025 3:37:43 PM 07/31/2025 3:41:40 PM spectra Progress: 17.5 GiB - 50 GiB 35.0% (83 MB/s)


The 'Progress' column for this job shows three sub-sections: 17.5 GiB - 50 GiB, 35.0% (83 MB/s), and 30.5 GiB - 50 GiB, 60.9% (139 MB/s). The 'Progress' column for the other three jobs shows 14.9 GiB - 50 GiB, 29.9% (68 MB/s) and COMPLETED.

**Figure 82** Active job transfer information.

## Change Job Priority

If desired, you can change the priority of an in-progress job.

1. On the task bar, click **Job Status**. The Jobs screen displays.

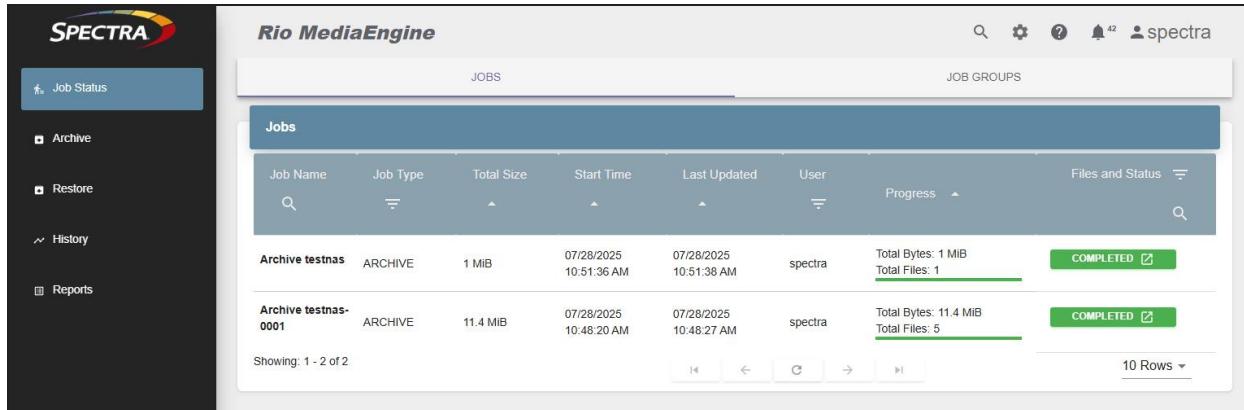


The screenshot shows the Rio MediaEngine interface with the 'Jobs' screen selected. The left sidebar has 'Job Status' highlighted. The main area displays a table of jobs with the following data:

Job Name	Job Type	Total Size	Start Time	Last Updated	User	Progress	Files and Status
Archive testnas	ARCHIVE	1 MiB	07/28/2025 10:51:36 AM	07/28/2025 10:51:38 AM	spectra	<div style="width: 100%;">Total Bytes: 1 MiB Total Files: 1</div>	COMPLETED
Archive testnas-0001	ARCHIVE	11.4 MiB	07/28/2025 10:48:20 AM	07/28/2025 10:48:27 AM	spectra	<div style="width: 100%;">Total Bytes: 11.4 MiB Total Files: 5</div>	COMPLETED

Showing: 1 - 2 of 2

**Figure 83** The Jobs screen.

2. If necessary, use the **Files and Status** drop-down menu and select **Active**.
3. Click the **Job Manager** icon (purple rectangle with a triangle and gear) next to the job for which you want to change the priority. The Job Manager screen displays.

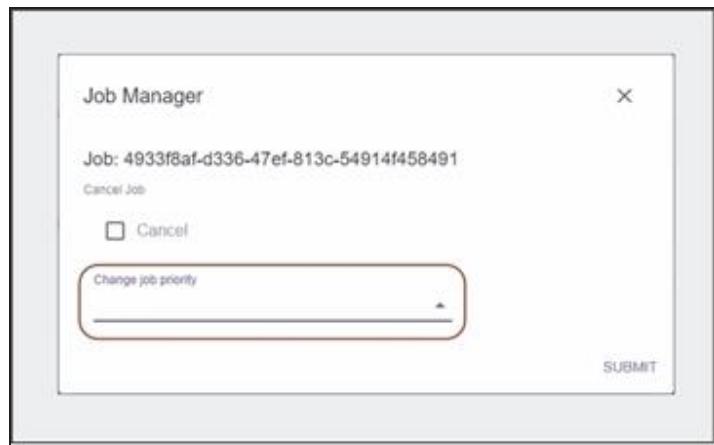

The screenshot shows the 'Job Manager' dialog box. It displays the job ID 'Job: 4933f8af-d336-47ef-813c-54914f458491' and a 'Cancel' button. Below the cancel button is a dropdown menu labeled 'Change job priority' with the following options: 'Urgent', 'High', 'Normal', and 'Low'. The 'Normal' option is selected. At the bottom right of the dialog is a 'SUBMIT' button.

**Figure 84** The Job Manager screen.

4. Use the **Change job priority** drop-down menu to select the new job priority. The job priority options are **Urgent**, **High**, **Normal**, and **Low**.

**Note:** Spectra Logic does not recommend setting jobs to **Urgent**.

5. Click **Submit**.

## Cancel an Active Job


If desired, you can cancel an active job using the Spectra Rio MediaEngine application.

1. On the task bar, click **Job Status**. The Jobs screen displays.

Job Name	Job Type	Total Size	Start Time	Last Updated	User	Progress	Files and Status
Archive testnas	ARCHIVE	1 MiB	07/28/2025 10:51:36 AM	07/28/2025 10:51:38 AM	spectra	100%	Total Bytes: 1 MiB Total Files: 1 <span style="background-color: green; border: 1px solid black; padding: 2px;">COMPLETED</span>
Archive testnas-0001	ARCHIVE	11.4 MiB	07/28/2025 10:48:20 AM	07/28/2025 10:48:27 AM	spectra	100%	Total Bytes: 11.4 MiB Total Files: 5 <span style="background-color: green; border: 1px solid black; padding: 2px;">COMPLETED</span>

**Figure 85** The Jobs screen.

2. If necessary, use the **Files and Status** drop-down menu and select **Active**.
3. Click the **Job Manager** icon (purple rectangle with a triangle and gear) next to the job you want to cancel. The Job Manager screen displays.

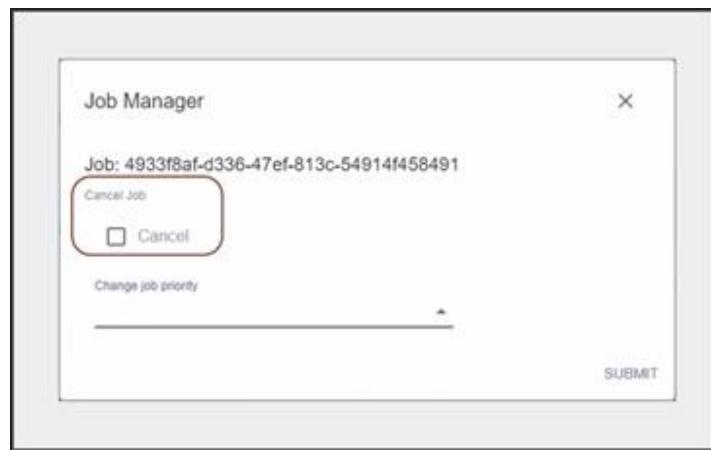


**Figure 86** The Job Manager screen.

4. Select **Cancel** and click **Submit** to cancel the job.

## Restart a Job

If a job failed or was manually canceled, you can use the Rio MediaEngine application to restart the job.

1. On the task bar, click **Job Status**. The Jobs screen displays.

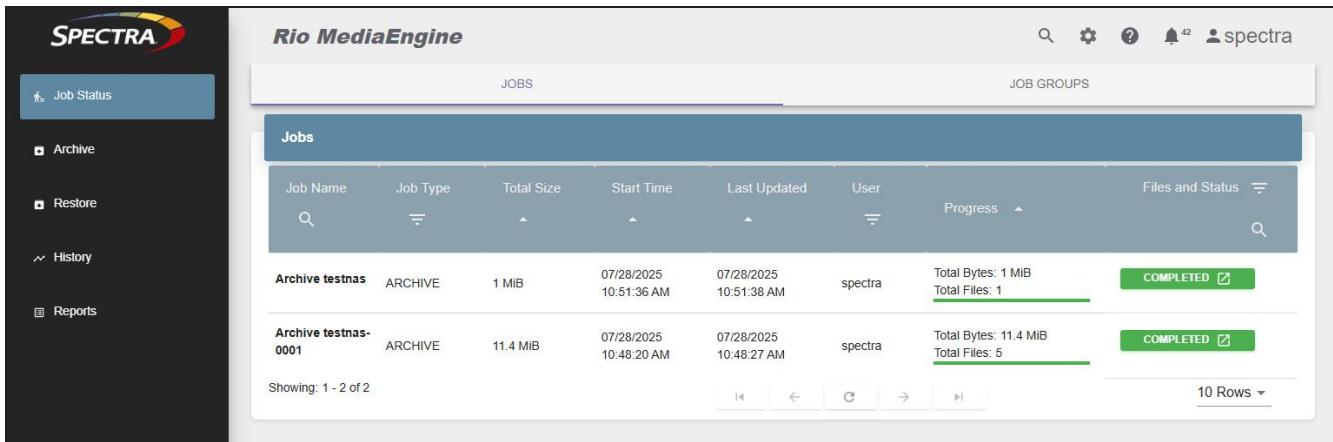

The screenshot shows the Rio MediaEngine application interface. On the left is a dark sidebar with the SPECTRA logo at the top, followed by a blue header bar with the text 'Job Status'. Below this are menu items: 'Archive', 'Restore', 'History', and 'Reports'. The main area is titled 'Rio MediaEngine' with a sub-header 'JOBS'. A sub-header 'Jobs' is displayed above a table. The table has columns: Job Name, Job Type, Total Size, Start Time, Last Updated, User, Progress, and Files and Status. There are two rows of data:

Job Name	Job Type	Total Size	Start Time	Last Updated	User	Progress	Files and Status
Archive testnas	ARCHIVE	1 MiB	07/28/2025 10:51:36 AM	07/28/2025 10:51:38 AM	spectra	<div style="width: 100%;">Total Bytes: 1 MiB Total Files: 1</div>	<span style="background-color: green; border: 1px solid black; padding: 2px 5px;">COMPLETED</span>
Archive testnas-0001	ARCHIVE	11.4 MiB	07/28/2025 10:48:20 AM	07/28/2025 10:48:27 AM	spectra	<div style="width: 100%;">Total Bytes: 11.4 MiB Total Files: 5</div>	<span style="background-color: green; border: 1px solid black; padding: 2px 5px;">COMPLETED</span>


At the bottom of the table, it says 'Showing: 1 - 2 of 2'. On the right side of the table, there are navigation buttons (14, ←, →, 10 Rows) and a search bar. The top right of the main area has icons for search, settings, help, notifications, and user information.

**Figure 87** The Jobs screen.

2. If necessary, use the **Files and Status** drop-down menu and select **Failed** or **Canceled**.
3. Click the **Restart** icon (green rectangle with circular arrow) next to the job you want to restart. A confirmation screen displays.
4. Click **Submit** to confirm restarting the job.

## View Detailed Job Information

1. For more information, click the job name or the button that displays the job status (**Completed**, **Active**, **Canceled**, **Failed**) on the row of a job for which you want to view detailed status.

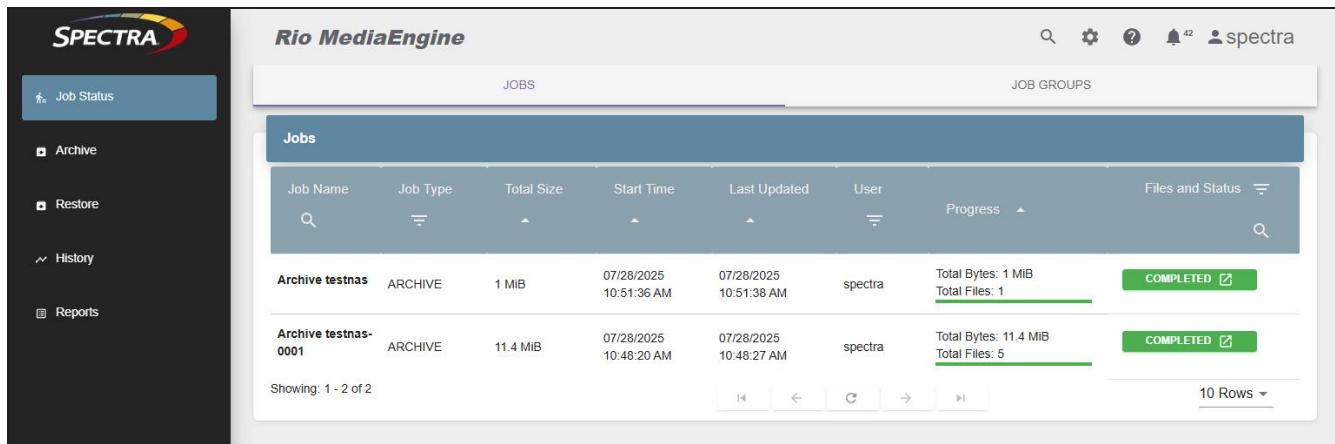


The screenshot shows the Rio MediaEngine interface with the 'Jobs' tab selected. The left sidebar has 'Job Status' as the active item, and the main area displays a table of jobs. The table columns are Job Name, Job Type, Total Size, Start Time, Last Updated, User, Progress, and Files and Status. Two rows are visible:

Job Name	Job Type	Total Size	Start Time	Last Updated	User	Progress	Files and Status
Archive testnas	ARCHIVE	1 MiB	07/28/2025 10:51:36 AM	07/28/2025 10:51:38 AM	spectra	100% Complete	Total Bytes: 1 MiB Total Files: 1 COMPLETED
Archive testnas-0001	ARCHIVE	11.4 MiB	07/28/2025 10:48:20 AM	07/28/2025 10:48:27 AM	spectra	100% Complete	Total Bytes: 11.4 MiB Total Files: 5 COMPLETED

At the bottom, it says 'Showing: 1 - 2 of 2' and '10 Rows'.

**Figure 88** The Jobs screen.

2. Click the **Job**, **Metadata**, or **Files** tab to view information about the job or the files included in the job.

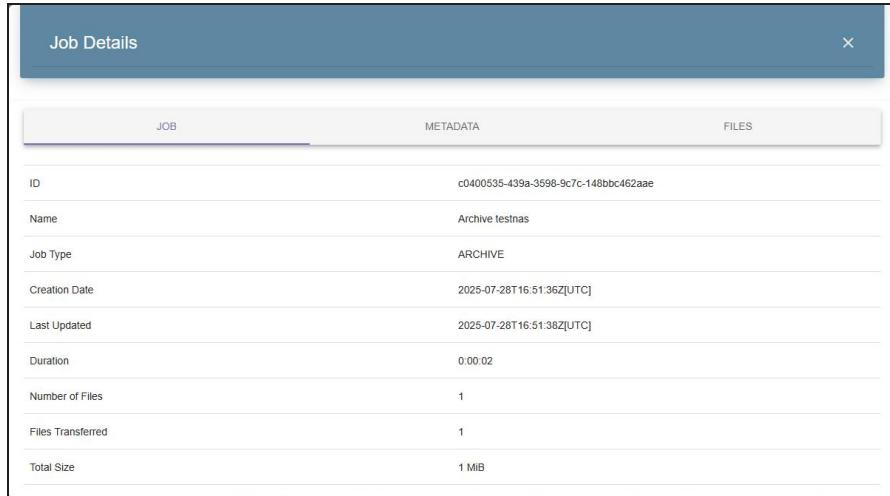

The screenshot shows the 'Job Details' screen for the job 'Archive testnas'. The top navigation bar has tabs for 'JOB', 'METADATA', and 'FILES', with 'JOB' being the active tab. The table below lists job details:


FIELD	VALUE
ID	c0400535-439a-3598-9c7c-148bbc462aae
Name	Archive testnas
Job Type	ARCHIVE
Creation Date	2025-07-28T16:51:36Z[UTC]
Last Updated	2025-07-28T16:51:38Z[UTC]
Duration	0.00:02
Number of Files	1
Files Transferred	1
Total Size	1 MiB

**Figure 89** The Job Details screen.

## View Job Groups

The Rio MediaEngine application automatically generates a job group when archiving a folder containing multiple files and sub-folders.

To view job groups history and details, click the **Job Groups** tab at the top of the Jobs screen. The Job Groups screen displays.

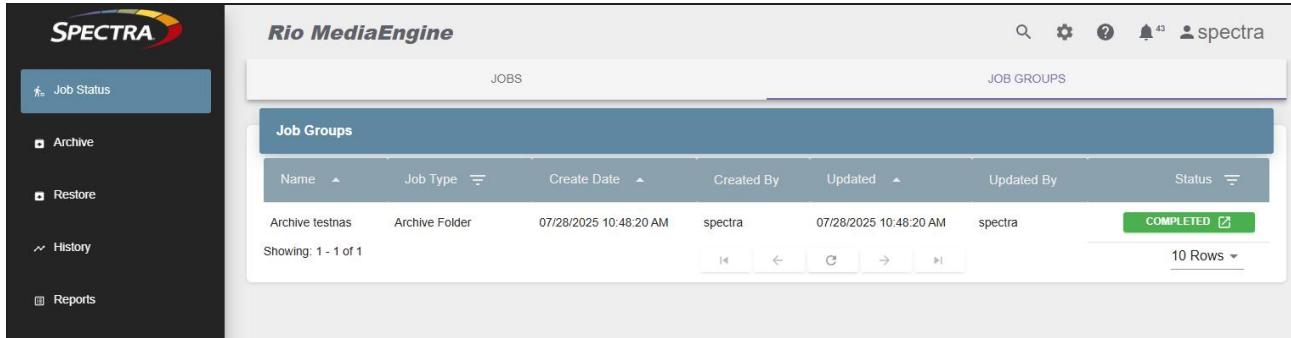


Name	Job Type	Create Date	Created By	Updated	Updated By	Status
Archive testnas	Archive Folder	07/28/2025 10:48:20 AM	spectra	07/28/2025 10:48:20 AM	spectra	COMPLETED

**Figure 90** The Job Groups screen.

The Job Groups screen supports the same management features of the Jobs screen as detailed above. Following the instructions above for the Jobs screen, users may view bulk archive job status, view active bulk archive job transfer information, change bulk archive job priority, cancel active bulk archive jobs, restart bulk archive jobs, and view detailed information about bulk archive jobs.

## View All Jobs in a Job Group

The Jobs Groups screen allows users to view all jobs contained in a singular bulk archive job. Job Groups can contain up to 10,000 files. If a Job Group exceeds 10,000 files, the Rio MediaEngine application generates additional Job Groups every 10,000 files. To view all jobs contained in a Job Group, navigate to the Job Groups screen and open the Job Details screen on a desired Job Group.

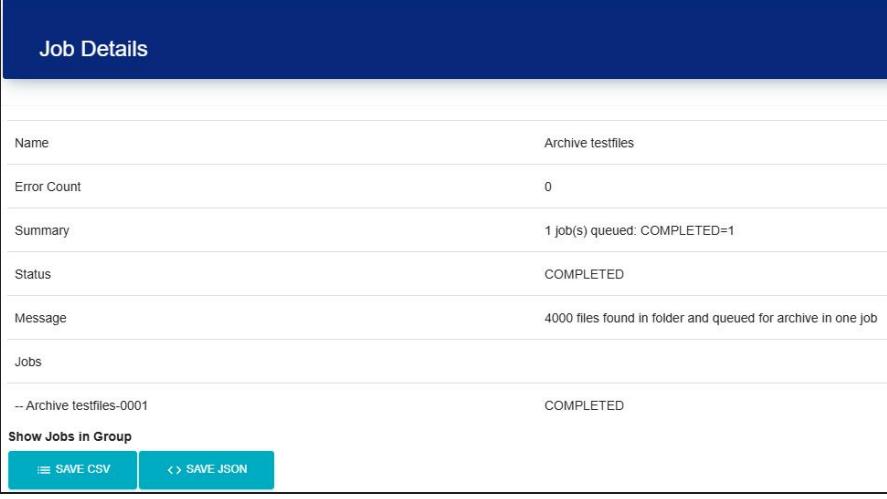

The screenshot shows the 'Job Details' screen for a bulk archive job. The job is named 'Archive testfiles' and has a status of 'COMPLETED'. It shows 0 errors and 1 job queued. The message indicates 4000 files were found and queued for archive. Below the table, a 'Show Jobs in Group' button is visible, along with 'SAVE CSV' and 'SAVE JSON' buttons.

Name	Archive testfiles
Error Count	0
Summary	1 job(s) queued: COMPLETED=1
Status	COMPLETED
Message	4000 files found in folder and queued for archive in one job
Jobs	COMPLETED
-- Archive testfiles-0001	

**Figure 91** The Bulk Archive Job Details screen.

On the Job Details screen, click **Show Jobs in Group**. This opens a filtered version of the Jobs Screen (not pictured) that only displays the jobs contained in the previously selected Job Group job.


# CHAPTER 5 - MANAGE THE SPECTRA RIO MEDIAENGINE APPLICATION

This chapter describes features that help you manage the Spectra Rio MediaEngine application.

<b>Manage Users</b>	<b>118</b>
Create a New User	119
Edit a User	120
Manage User Groups	121
Change User Password	121
Delete a User	121
<b>Manage Authenticators</b>	<b>122</b>
Create a New Authenticator	122
Edit an Authenticator	123
Delete an Authenticator	123
<b>Manage Groups</b>	<b>124</b>
New Group	125
View Group Details	126
Edit Group	127
Delete Group	127
<b>Manage Namespaces</b>	<b>128</b>
Edit Namespace Target Storage	128
View Namespace Target Storage Information	129
Delete a Namespace Target Storage	130
Delete a Namespace	130
<b>Manage Clusters, Devices, and Source Storage</b>	<b>131</b>
Delete a Cluster Member	131
Delete a Device	132
Delete Source Storage	132
<b>Log Out of Existing Session</b>	<b>133</b>

# MANAGE USERS

The Rio MediaEngine application supports creating and editing users using the Rio MediaEngine user interface. To view the Users screen, click **Settings** (gear icon) > **Users**.

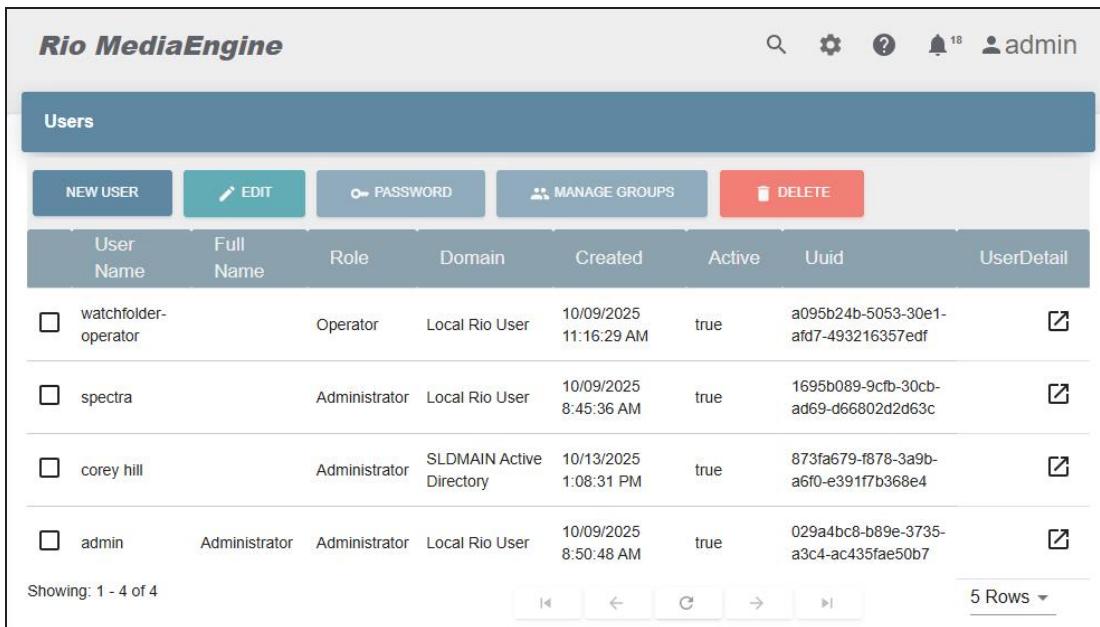


User Name	Full Name	Role	Domain	Created	Active	Uuid	UserDetail	
<input type="checkbox"/> watchfolder-operator		Operator	Local Rio User	10/09/2025 11:16:29 AM	true	a095b24b-5053-30e1-af7-493216357edf		
<input type="checkbox"/> spectra		Administrator	Local Rio User	10/09/2025 8:45:36 AM	true	1695b089-9cfb-30cb-ad69-d66802d2d63c		
<input type="checkbox"/> corey hill		Administrator	SLDMAN Active Directory	10/13/2025 1:08:31 PM	true	873fa679-f878-3a9b-a6f0-e391f7b368e4		
<input type="checkbox"/> admin		Administrator	Administrator	Local Rio User	10/09/2025 8:50:48 AM	true	029a4bc8-b89e-3735-a3c4-ac435fae50b7	

**Figure 92** The Users screen.

## Create a New User

To create a new user, click **New User** on the Users screen. The New User window displays.

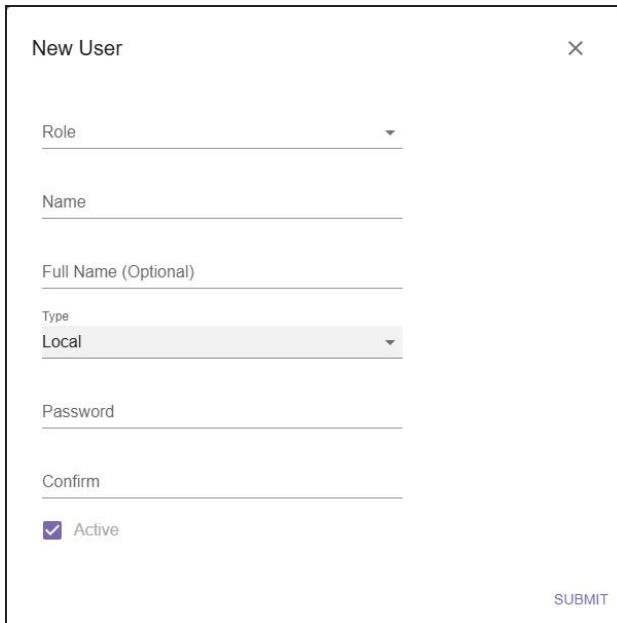

The New User window is a modal dialog with the following fields:

- Role:** A dropdown menu.
- Name:** A text input field.
- Full Name (Optional):** A text input field.
- Type:** A dropdown menu currently set to "Local".
- Password:** A text input field.
- Confirm:** A text input field.
- Active:** A checked checkbox.

At the bottom right is a **SUBMIT** button.

**Figure 93** The New Users window.

1. Use the drop-down menu to select a **Role** for the user:
  - **Administrators** have unrestricted access to the Rio MediaEngine application and can change settings in the application.
  - **Operators** have limited access to the Rio MediaEngine application. Operators may queue archive and restore jobs. Operators may view job history, namespace object data, and reports.
2. Enter a **Name** for the new user.
3. Optionally, enter a **Full Name** for the user. The full name of the user will display under User Detail.
4. Select the **Type** from the drop-down menu. Local users require you to create a password. LDAP users require a previously configured LDAP server and user. You cannot change a user type after creation.
5. Enter a **Password** and **Confirm** the password for a local user.
6. If desired, deselect **Active**. Inactive users cannot access the Rio MediaEngine application.
7. Click **Submit**.

## Edit a User

To edit a user, select a user to edit on the Users screen then click **Edit**. The Edit User window appears.

The screenshot shows the 'Edit spectra' window. It contains the following fields:

- Role:** Administrator
- Name:** spectra
- Full Name (Optional):** (empty)
- Type:** Local
- Active:**

At the bottom right is a **SUBMIT** button.

**Figure 94** The Edit User window.

1. Use the drop-down menu to select a **Role** for the user.

**Administrators** have unrestricted access to the Rio MediaEngine application and can change settings on the application.

**Operators** are have limited access to the Rio MediaEngine application. Operators may queue archive and restore jobs. Operators may create, edit, and delete endpoints. Operators may view job history, namespace object data, and reports.

2. Optionally, enter a **Full Name** for the user. The full name of the user will display under User Detail.
3. If desired, deselect **Active**. Inactive users cannot access the Rio MediaEngine application.
4. Click **Submit**.

## Manage User Groups

To manage a local user's groups, select the desired local user then click **Manage Groups**. The Manage Groups windows displays.




**Figure 95** The Manage Groups window.

1. Use the **Manage Groups** drop-down menu to select groups for the local user.
2. Click **Submit**.

## Change User Password

To change a local user's password, select the desired local user then click **Password**. The Set Password window displays.

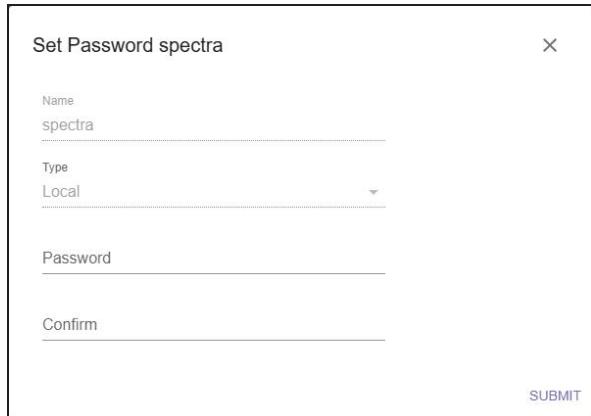

**Figure 96** The Set Password window.

1. Enter a new password in the **Password** text field.
2. Re-enter the new password in the **Confirm** text field.
3. Click **Submit**.

## Delete a User

To delete a user, select a user from the Users list and click **Delete**.

# MANAGE AUTHENTICATORS

Use the instructions in this section to create, edit, and delete authenticators. To view the Authenticators screen, click **Settings** (gear icon) > **Authenticators**.



**Figure 97** The Authenticators screen.

## Create a New Authenticator

To create a new authenticator, click **New** on the Authenticators screen. The **LDAP Configuration** window displays.

Authenticator Name	Friendly name for the authenticator	
Domain Component	Full domain name (mycompany.com)	
LDAP Server	Name or IP address of LDAP server	
Port	636	<input checked="" type="checkbox"/> TLS <small>?</small>
LDAP Port (default 389, 636 for TLS)		
LDAP Query User	LDAP Password	Confirm Password
User with read access	for LDAP Query User	Re-enter LDAP Password
LDAP Access	<input type="radio"/> All <input checked="" type="radio"/> Groups <input type="radio"/> None	
<i>Allow specific groups to authenticate. Assign defined role</i>		
Administrator Group	Members of this group allowed to authenticate as administrators	
Operator Group	Members of this group allowed to authenticate as operators	
<b>SUBMIT</b>		

**Figure 98** The LDAP Configuration window.

1. In the **Authenticator Name** field, enter the name for the authenticator.

2. In the **Domain Component** field, enter the full domain name for your active directory authentication.
3. In the **LDAP Server** field, enter the name or IP address for the LDAP server.
4. Enter the **Port** for the LDAP server.
5. Select **TLS** to enable TLS access for encrypted LDAP traffic.
6. In the **LDAP Query User**, **LDAP Password**, and **Confirm Password** fields, enter the user information for an existing LDAP user.
7. Under **LDAP Access**, select between All, Groups, and None.
  - **All** allows all domain users to authenticate. Use the drop-down menu to select the default user role for domain users.
  - **Groups** allows you to assign Administrator and Operator roles to all members of a group on your LDAP server.
  - **None** allows only pre-configured users on the Rio MediaEngine to authenticate.
8. Click **Submit**.

## Edit an Authenticator


To edit an authenticator, select an authenticator from the Authenticators list and click **Edit** and use the LDAP Configuration window to make all desired changes.

## Delete an Authenticator

To delete an authenticator, select an authenticator from the Authenticators list and click **Delete**.

# MANAGE GROUPS

Use the instructions in this section to create, edit, and delete groups. To view the Groups screen, click **Settings** (gear icon) > **Groups**.

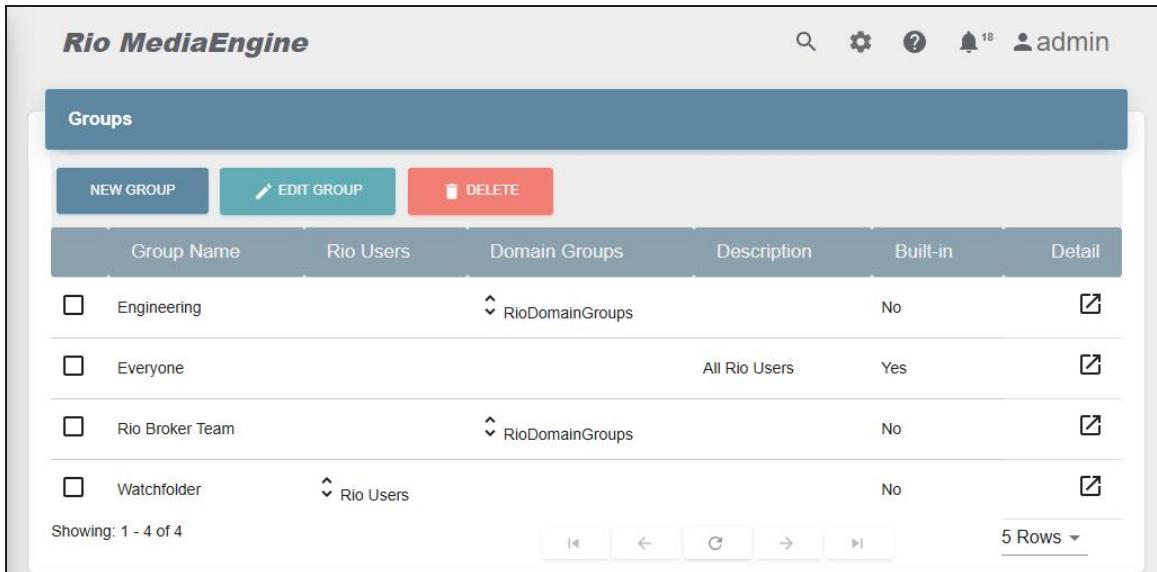


Group Name	Rio Users	Domain Groups	Description	Built-in	Detail
Engineering	▼ RioDomainGroups			No	<input type="checkbox"/>
Everyone		All Rio Users		Yes	<input type="checkbox"/>
Rio Broker Team	▼ RioDomainGroups			No	<input type="checkbox"/>
Watchfolder	▼ Rio Users			No	<input type="checkbox"/>

**Figure 99** The Groups screen.

## New Group

To create a new group, click **New Group** on the Groups screen. The New Group window displays.

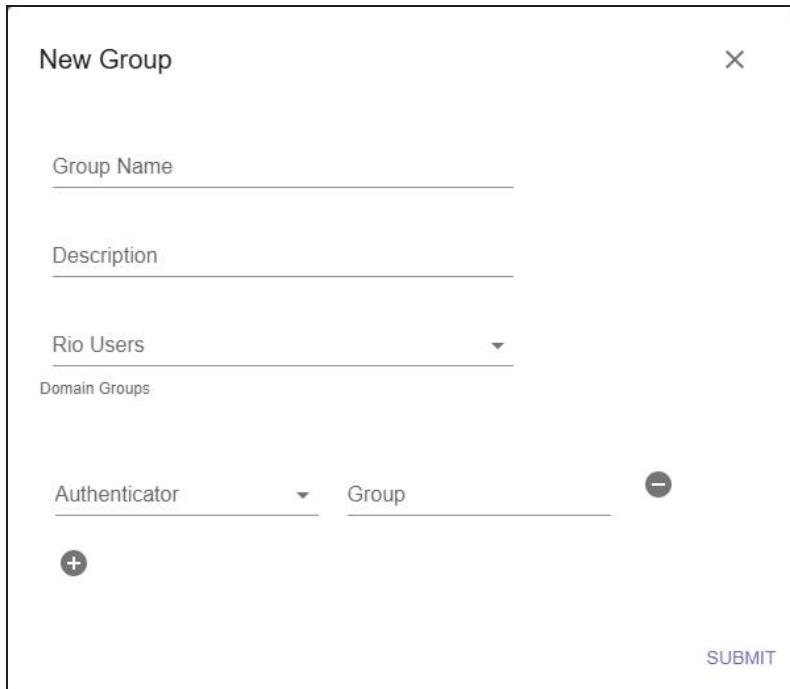

The screenshot shows the 'New Group' window. At the top is a title bar with the text 'New Group' and a close button (X). Below the title are two text input fields: 'Group Name' and 'Description'. Underneath these is a dropdown menu set to 'Rio Users', with an option for 'Domain Groups' below it. At the bottom of the window are two dropdown menus: 'Authenticator' and 'Group'. Between them are a plus sign (+) button and a minus sign (-) button. In the bottom right corner is a 'SUBMIT' button.


**Figure 100** The New Group window.

1. In the text field, enter a **Group Name**.
2. In the text field, enter a **Description**.
3. Using the drop-down menu, add any desired **Rio Users** to the group.
4. If desired, click the **Plus** (+) button to add an Authenticator.
5. Use the drop-down menu to select a configured **Authenticator**.
6. Use the **Group** text field to enter any groups configured on the authenticator domain.
7. Click **Submit**.

## View Group Details

After creating a group, you can view information about the group, such as the group name, UUID, domain groups, description, Rio users assigned to the group, namespaces using the group, sources using the group, and domain groups.

1. On the toolbar in the upper-right of the application window, click **Settings** (gear icon) > **Groups**. The Groups screen displays.
2. On the Namespaces screen, click the **Details** button (square with diagonal arrow) on the row of the group for which you want to view information. The Group Detail screen displays.

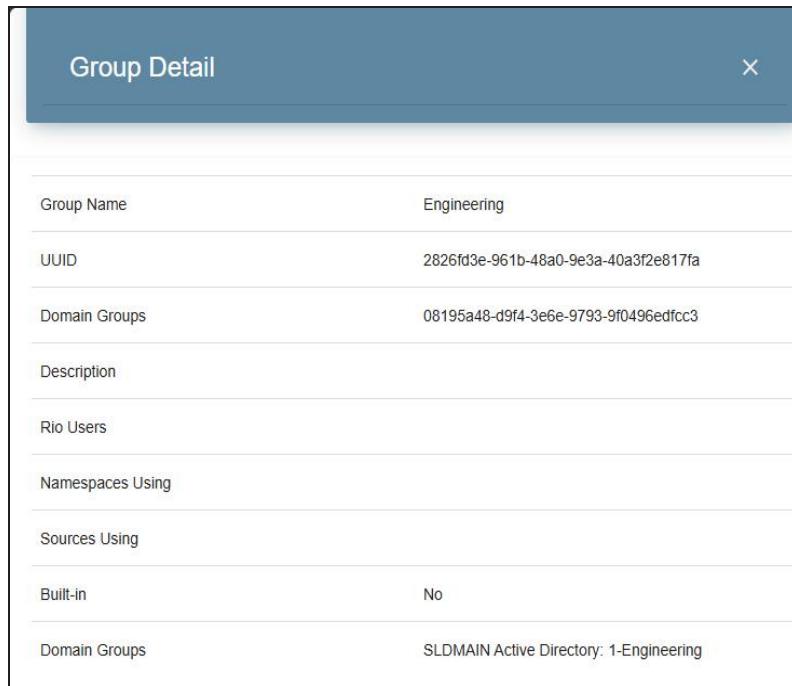

The screenshot shows a modal window titled "Group Detail" with an "X" button in the top right corner. The window contains a table with the following data:

Group Name	Engineering
UUID	2826fd3e-961b-48a0-9e3a-40a3f2e817fa
Domain Groups	08195a48-d9f4-3e6e-9793-9f0496edfcc3
Description	
Rio Users	
Namespaces Using	
Sources Using	
Built-in	No
Domain Groups	SLDMAIN Active Directory: 1-Engineering

**Figure 101** The Group Detail screen.

## Edit Group

To edit a group, select a group from the Groups list and click **Edit Group**. The Edit Group window appears.

The screenshot shows the 'Edit Group' window with the following details:

- Group Name:** Engineering
- Description:** (empty)
- Rio Users:** Selected
- Domain Groups:** (disabled)
- Authenticator:** SLDMAIN Active Directory
- Group:** 1-Engineering
- Buttons:** A '+' button for adding users and a '-' button for removing users.
- Actions:** A 'SUBMIT' button at the bottom right.

**Figure 102** The Edit Group window.

1. Use the Edit Group window to make any and all desired changes to the group configuration.
2. Click **Submit**.

## Delete Group

To delete a group, select a group from the Groups list and click **Delete**.

# MANAGE NAMESPACES

Use the instructions in this section to edit namespace target storage indexing, view target storage details, configure target storage write protection, and delete a target storage or namespace.

## Edit Namespace Target Storage

After creating target storage in a namespace, you can force the target storage to index or to be re-indexed if desired. Also, you can configure the target storage write protection, and set the object ingest date.

1. On the toolbar in the upper-right of the application window, click **Settings** (gear icon) > **Namespaces**. The Namespaces screen displays.
2. Select the target storage you want to modify and click **Edit Target**. The *Edit target storage name* dialog box displays.



**Figure 103** The *Edit target storage name* dialog box.

3. Configure the desired settings:

Setting	Description
<b>Index Tab - Index</b>	Index the target storage associated with the namespace in the Spectra Rio MediaEngine application. This option does not add file information into the application when the file creation timestamp is older than the last Spectra Rio MediaEngine index operation timestamp.
<b>Index Tab - Re-Index</b>	Index the target storage associated with the namespace in the Spectra Rio MediaEngine application. All files are added into the application regardless of the object timestamp. All objects in the target storage are updated in the Spectra Rio MediaEngine application.

Setting	Description
<b>Config Tab - Writable</b>	Flag the target storage associated with the namespace in the Spectra Rio MediaEngine application. This option prevents users from writing or editing the associated target storage.
<b>Ingest Date Tab - Ingest Date</b>	Set the ingest date for objects in the target storage without a valid ingest date, such as legacy data archived or indexed with RioBroker 4.3, or earlier. This date is used by Lifecycles and Policies.


**4. Click **Submit**.**

**Note:** During the re-indexing, files in the namespace show as “Indexing” on the Jobs status screen.

## View Namespace Target Storage Information

After creating a target storage in a namespace, you can view information about the target storage, such as the type, name, creation date, last index date, and the write protection status.

1. On the toolbar in the upper-right of the application window, click **Settings** (gear icon) > **Namespaces**. The Namespace screen displays.
2. On the Namespaces screen, click the **Details** button (square with diagonal arrow) on the row of the target storage for which you want to view information. The Details screen displays.

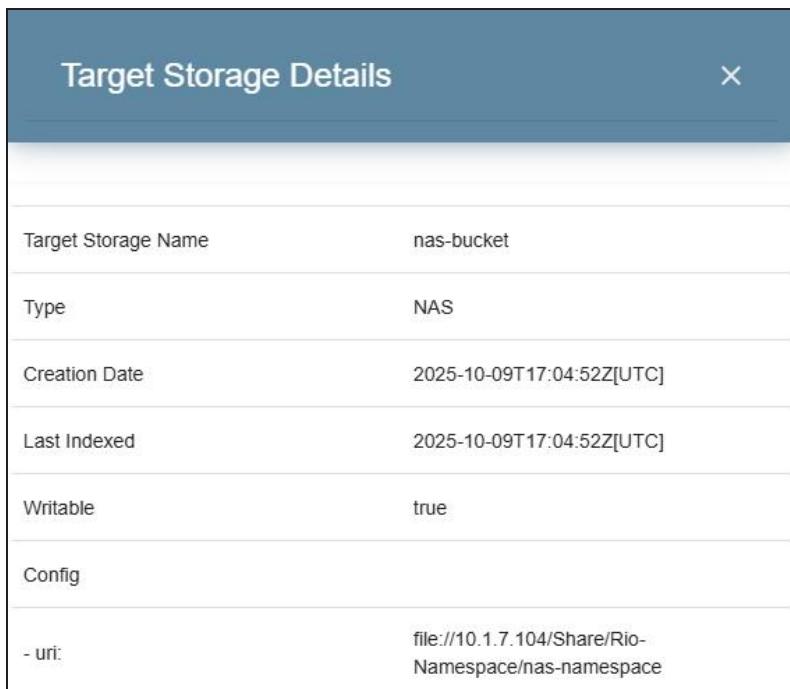

**Figure 104** The Namespace Target Storage details screen.

## Delete a Namespace Target Storage

If desired, you can delete a previously configured namespace target storage.

---



### CAUTION

Before deleting a BlackPearl namespace target storage, you must remove the bucket protection flag. Failure to remove the protection flag results in the BlackPearl bucket being inaccessible and requires the user to create a new namespace or namespace target storage on the bucket to remove the protection flag.

---

**Note:** No files are deleted when deleting a namespace target storage, but metadata used by the Spectra Rio MediaEngine application associated with archived files is deleted.

1. On the toolbar in the upper-right of the application window, click **Settings** (gear icon) > **Namespaces**. The Namespace screen displays.
2. On the Namespaces screen, select the target storage you want to delete and click **Delete Target**. The delete target storage dialog box displays.
3. If necessary, select the **Force** option. This option is required if the namespace has any buckets with object data.
4. Click **Submit** to delete the namespace target storage.

## Delete a Namespace

If desired, you can delete an existing namespace.

---



### CAUTION

Before deleting a namespace with a BlackPearl bucket, you must remove the bucket protection flag. Failure to remove the protection flag results in the BlackPearl bucket being inaccessible and requires the user to create a new namespace or namespace target storage on the bucket to remove the protection flag.

---

**Note:** No files are deleted when deleting a namespace, but metadata used by the Spectra Rio MediaEngine application associated with archived files is deleted.

1. On the toolbar in the upper-right of the application window, click **Settings** (gear icon) > **Namespaces**. The Namespace screen displays.
2. Select the namespace you want to delete and click **Delete Namespace**. The Delete Namespace window displays.
3. If necessary, select the **Force** option. This option is required if the namespace has any buckets with object data.
4. Click **Submit**.

# MANAGE CLUSTERS, DEVICES, AND SOURCE STORAGE

If desired, you can delete cluster members, or source storage using the instructions in this section.

Select the item you want to delete:

- [Delete a Cluster Member below](#)
- [Delete a Device on the next page](#)
- [Delete Source Storage on the next page](#)

## Delete a Cluster Member

Use the instructions in this section to delete a cluster member.


1. On the toolbar in the upper-right of the application window, click **Settings** (gear icon) > **Cluster**. The Cluster screen displays.

**Figure 105** The Cluster screen.

2. Select the cluster member you want to delete and click **Delete**. A confirmation window displays.
3. Click **Submit** to delete the cluster member.

## Delete a Device

1. On the toolbar in the upper-right of the application window, click **Settings** (gear icon) > **Devices**. The Devices screen displays.

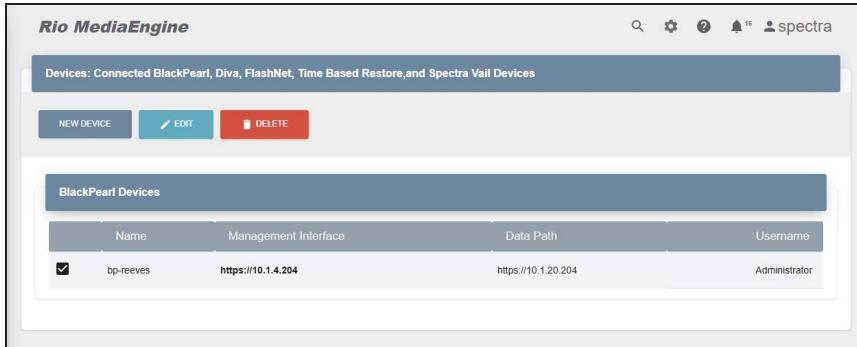


**Figure 106** The Devices screen.

2. On the Devices screen, select the device you want to delete and click **Delete**. A confirmation window displays.
3. Click **Submit** to confirm the deletion.

## Delete Source Storage

1. On the toolbar in the upper-right of the application window, click **Settings** (gear icon) > **Source Storage**. The Source Storage screen displays.

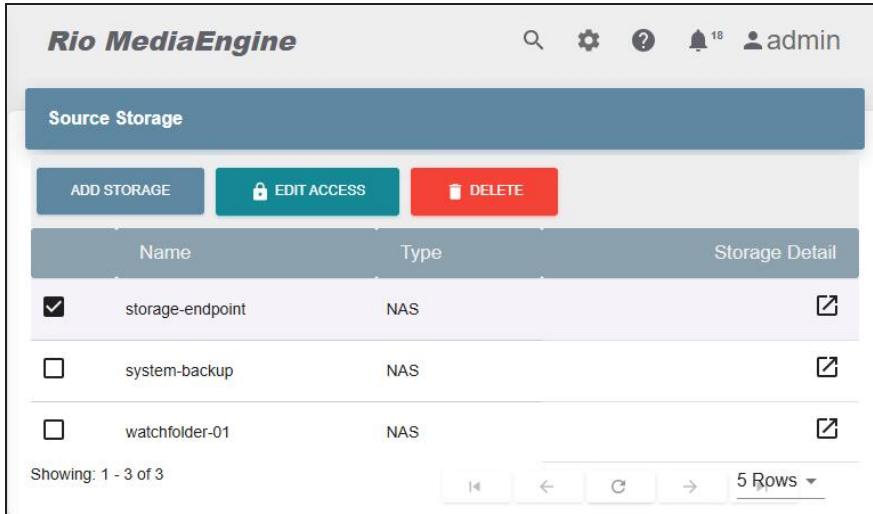


**Figure 107** The Source Storage screen.

2. On the Source Storage screen, select the storage you want to delete and click **Delete**. The Delete confirmation screen displays.
3. Click **Submit** to confirm the deletion.

## LOG OUT OF EXISTING SESSION

Use the toolbar on the upper-right of the Spectra Rio MediaEngine application interface to log out of the interface and return to the login screen.

1. On the toolbar, click the **User** icon (person) at the far right of the toolbar.

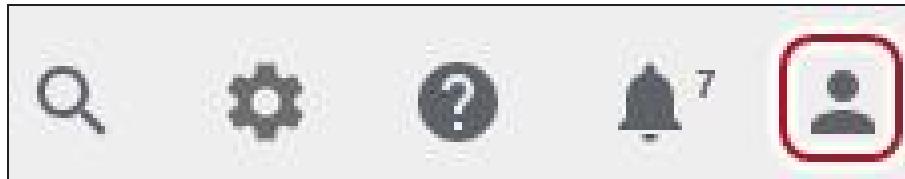

**Figure 108** The toolbar.

2. Click **Logout**. The Login screen displays.

# CHAPTER 6 - APPLICATION INFORMATION AND REPORTS

This chapter describes features that provide information and statistics for the Rio MediaEngine application, as well as messaging, logs, and reports.


---

<b>History</b> .....	<b>135</b>
<b>Logs</b> .....	<b>136</b>
Create a Log Set .....	136
Download a Log Set .....	136
Delete a Log Set .....	136
Set Log Level .....	136
<b>Reports</b> .....	<b>137</b>
Object Search Reports .....	137
Live Data Reports .....	138
Settings Reports .....	139
<b>Messages</b> .....	<b>140</b>
<b>System Screen</b> .....	<b>141</b>

# HISTORY

The History screen allows you to view past data activity based on bytes transferred, number of files transferred, or number of jobs processed.

To access the History screen, on the task bar, select **History**.

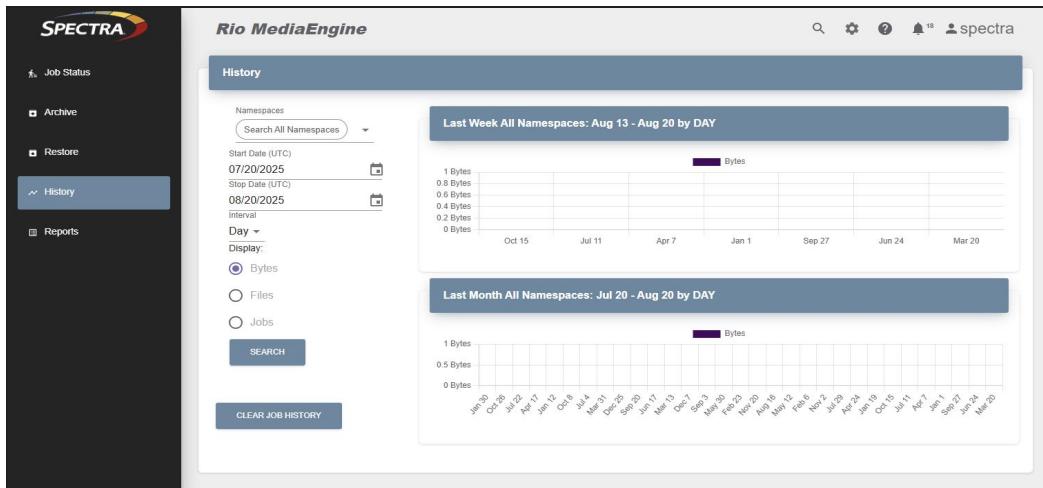

**Figure 109** The History screen.

The History screen always shows the previous month and previous week.

- To add a custom graph, use the **Namespaces**, **Start Date** and **Stop Date**, and **Interval** menus.
- Changing the **Legend** (Bytes, Files, Jobs) updates all graphs on the History screen.
- **Mouse-over** graph bars for exact amounts.
- Click **Clear Job History** to delete job history information from the database. In the Clear Job History screen, use the **Clear Jobs Before** calendar to set the date for which you want to clear all older job information.

# LOGS

The Spectra Rio MediaEngine application automatically creates error logs and writes event information into log files for troubleshooting purposes. A log set, which gathers the current log of each type, can be generated manually.

**Note:** The current log file is not cleared when a log set is created. If one log set is created and then a second log set is created before the log file reaches 10 MB in size and is cleared, the two log sets will have overlapping information.

To access the Logs screen, click **Settings** (gear icon) > **Logs**.

Name	Creation Date	Status
3f9e086b-6d31-33a7-91f8-60d942512776	08/20/2025 11:36:24 AM	COMPLETE
Showing: 1 - 1 of 1		
5 ROWS ▾		

**Figure 110** The Logs screen.

## Create a Log Set

1. Click **Create A New Log Set**. The Create a new Log Set dialog box displays.
2. Click **Submit**. A new log set is collected immediately.

## Download a Log Set

To download a log set, select the log set or sets from the list and click **Download**. The log set begins downloading to your host computer.

## Delete a Log Set

To delete a log set, select the log set or sets from the list and click **Delete** to confirm the deletion.

## Set Log Level

To change the level of detail in the log sets, click **Set Log Level**, then use the **Level** drop-down menu to select Info or Debug detail level and click **Submit**.

# REPORTS


The Rio MediaEngine application provides custom object search reports which allow users to see how and where files were moved. The application also provides reports on aspects of the application including configured devices, namespaces, endpoints, as well as job information, messages, and system information.

Object search reports are downloadable in Comma Separated Value (CSV) format. Settings reports are available in both CSV and JSON (Java Script Object Notification) formats.

## Object Search Reports

Use the following instructions to generate an object search report.

1. Click **Settings** (gear icon) > **Reports**. The Reports screen displays.

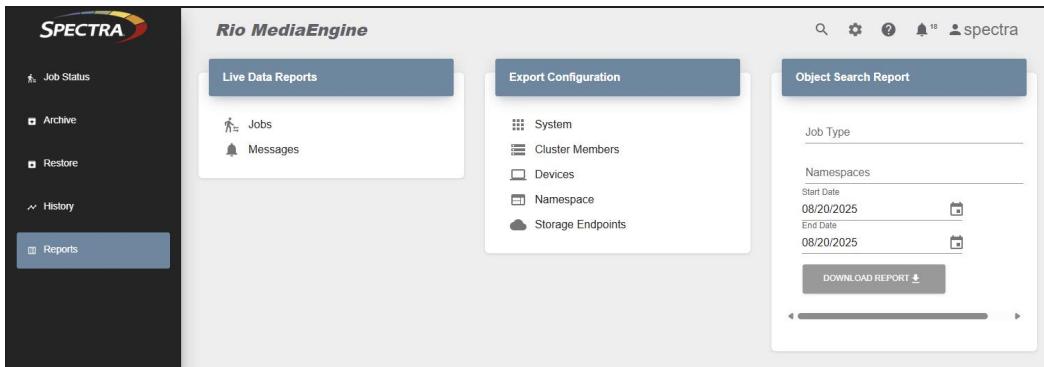

**Figure 111** The Reports screen.

2. Use the **Job Type** drop-down menu to select **Archive**, **Restore**, or both.
3. Use the **Namespaces** drop-down menu to select one or more namespaces.
4. Select a **Start Date** and an **End Date**.

**Note:** If you do not select an End Date, the system uses the current day for the end date.

5. Click **Download Report**. The report is downloaded to your host computer.

## Live Data Reports

Use the instructions below to view and save Live Data Reports.

1. Click **Settings** (gear icon) > **Reports**. The Reports screen displays.

**Figure 112** The Reports screen.

2. Under the **Live Data Reports** banner, click the row of the live data you want to view.

Report	Description
<b>Jobs</b>	Displays information about each job processed by the application including job name, ID, type, status, progress, total files in the job, total files transferred, total bytes transferred, and the last update time.
<b>Messages</b>	Displays the message subject, details, severity, creation date, and if the message is read or unread.


A screen displays showing the data as well as providing controls to download the information in CSV or JSON format.

**Figure 113** The Jobs screen displaying live data information.

## Settings Reports

Use the instructions below to view and save Settings reports.

1. Click **Settings** (gear icon) > **Reports**. The Reports screen displays.

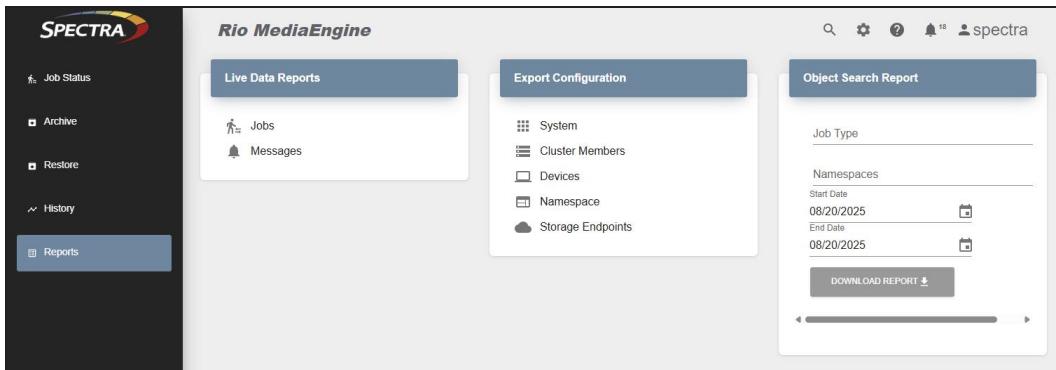

**Figure 114** The Reports screen.

2. Under the **Export Configuration** banner, click the row of the system report you want to view.

Report	Description
<b>System</b>	Displays information about the Rio MediaEngine application software, the host system, memory usage, and application uptime.
<b>Cluster Members</b>	Displays the cluster role (master or node), cluster port, HTTP port, IP address, and member ID for each cluster.
<b>Devices</b>	Displays information for devices configured in the application.
<b>Namespace</b>	For each configured namespace the report includes information about the namespace buckets including the bucket name, type, creation date, last index date, read/write status, and information about devices used in the namespace.
<b>Endpoints</b>	Displays the endpoint name, type, URL, and login credentials.

- Notes:**
- For each report, you can **Refresh** the currently displayed information, as well as **Save** the report in a CSV or JSON format.
  - For the Jobs report, if the system has processed more than 1,000 jobs, use the **Next** and **Prev** buttons to navigate through the list.

# MESSAGES

The Messages screen contains messages generated by the Rio MediaEngine application.

On the toolbar, click **View Messages** (bell icon). The Messages screen displays.

**Note:** If there are unread messages, a blue oval appears next to the bell icon displaying the number of unread messages.

**Figure 115** The Messages screen.


- Select the **Read** check box on a message row to mark that message as read. Click **Mark All Messages** to mark all messages as read.
- Click the **Detail** icon on the row of a message for which you want to view more detail.
- Use the < and > arrows, **Prev**, and **Next** buttons to navigate the message list.
- Use the **Rows** drop-down menu to set how many messages are displayed at one time.
- Use the **Refresh** button (circle with an arrow) to refresh the Notifications screen.

**Note:** If you use your browser to refresh the Notifications screen, the number of rows displayed returns to the default of five.

# SYSTEM SCREEN

The System screen contains information related to the Spectra Rio MediaEngine application software and the host computer on which the application is installed.

On the toolbar, click **Settings** (gear icon) and select **System**. The System information screen displays.

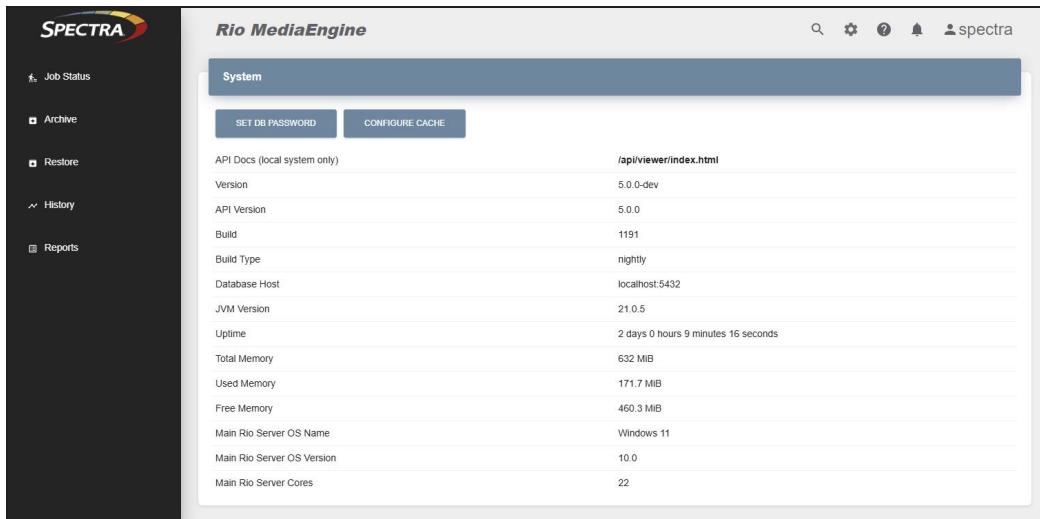

The screenshot shows the Rio MediaEngine application interface. On the left is a dark sidebar with the Spectra logo and links for Job Status, Archive, Restore, History, and Reports. The main area has a light background with a header 'Rio MediaEngine' and a sub-header 'System'. Below the sub-header are two buttons: 'SET DB PASSWORD' and 'CONFIGURE CACHE'. A table lists system information. At the top of the table is a row for 'API Docs (local system only)' with a link to '/apiViewer/index.html'. The table then lists various system parameters with their values:

Parameter	Value
Version	5.0.0-dev
API Version	5.0.0
Build	1191
Build Type	nightly
Database Host	localhost:5432
JVM Version	21.0.5
Uptime	2 days 0 hours 9 minutes 16 seconds
Total Memory	632 MB
Used Memory	171.7 MB
Free Memory	460.3 MB
Main Rio Server OS Name	Windows 11
Main Rio Server OS Version	10.0
Main Rio Server Cores	22

**Figure 116** The System screen.

Click the URL on the **API Docs** row to open the Swagger API documentation in a new web browser tab.

**Note:** This link only displays if you are using a browser on the same host system where Rio MediaEngine is installed. To access API documentation on a remote connection, see [Spectra Rio MediaEngine Archive Solution Overview](#) on page 17.


# CHAPTER 6 - RIO MEDIAENGINE DATABASE OPERATIONS AND SOFTWARE UPDATE

This chapter describes Rio MediaEngine database backup, restore, and transfer, as well as instructions for updating the application software.

<b>Database Backup</b> .....	<b>143</b>
Automatic Database Backup Schedule .....	143
Manual Database Backup .....	144
Change Database Password .....	145
<b>Database Restore</b> .....	<b>146</b>
Restore Database to an Existing 4.x or 5.x Installation .....	146
Restore Database to an Existing Rio 3.x Installation .....	146
<b>Database Transfer</b> .....	<b>147</b>
Transfer Rio 4.x/5.x Database to a Rio 4.x/5.x Installation .....	147
Transfer Rio 3.5 Database to Rio 4.x/5.x Installation .....	148
<b>Updating the Rio MediaEngine Application</b> .....	<b>149</b>
Updating from Version 4.x or Later .....	149
Updating from Version 3.5 .....	149
Updating from Version 3.4 or Earlier .....	152

# DATABASE BACKUP

Use the instructions in this section to backup and restore Rio MediaEngine databases. To view the Database Backup screen, click **Settings** (gear icon)> **DB Backup**.

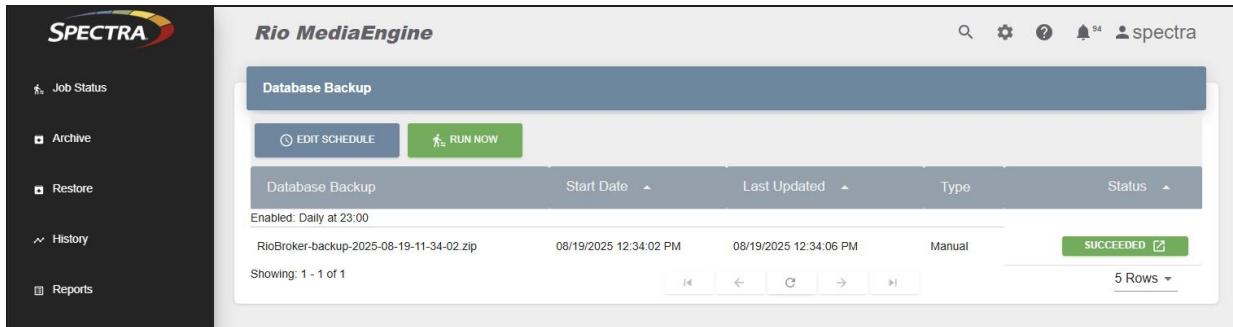

**Figure 117** The Database Backup screen.

## Automatic Database Backup Schedule

The Rio MediaEngine application creates automatic database backups on a schedule. To edit the database backup schedule, click **Edit Schedule** and follow the instructions below.

### Edit Schedule

*Schedule regular backups of the Rio database for faster recovery and preservation of configuration information and additional metadata.*

Interval	Start Time
Daily	23:00

?

Endpoints

Brokers

No Namespace (only save on endpoint)

Disable Backup (Not recommended)  
 Delete on Endpoint after Archive

SUBMIT

**Figure 118** The Edit Schedule screen.


1. Use the **Interval** drop-down menu to select the automatic database backup frequency. Spectra Logic recommends daily database backups.

2. Use the **Start Time** drop-down menu to select the start time of the backup process. **Start Time** is based on the timezone of the system running the Rio MediaEngine application.
3. Use the **Endpoints** drop-down menu to select the endpoint to contain the database backup.
4. Use the **Namespace** drop-down menu to select the namespace to use during the backup.
5. Optionally, select **Disable Backup (Not recommended)** to disable the automatic backup schedule.
6. Optionally, select **Delete on Endpoint after Archive** to delete the backup zip file after it is successfully archived.

## Manual Database Backup

The Rio User Interface allows you to manually create a database backup using a one-click solution. This section covers using the Rio User Interface to create a manual database backup.

1. Click **Settings** (gear icon)> **DB Backup**. The Database Backup screen displays.

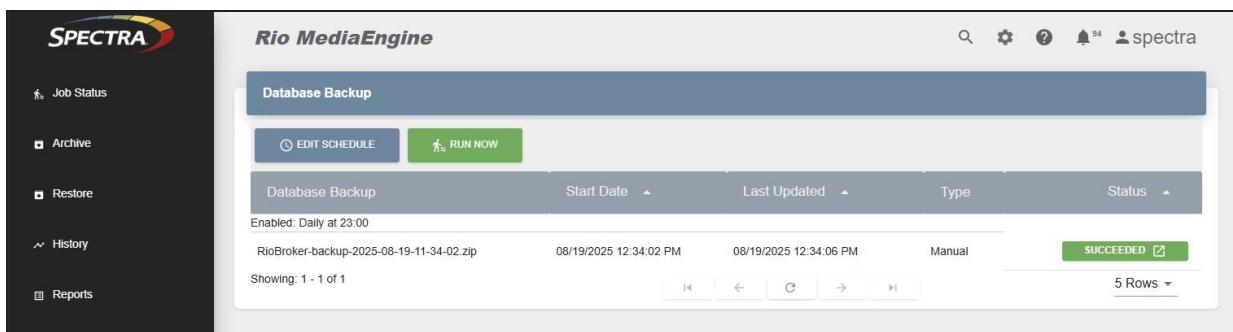

**Figure 119** The Database Backup screen.

2. Click **Run Now**. A confirmation screen displays.
3. Click **Submit** to create the manual database backup.

## Change Database Password

If desired, you can change the Rio database password. Use the instructions in this section to change the password.

1. On the toolbar, click **Settings** (gear icon) and select **System**. The System information screen displays.

System	
SET DB PASSWORD	CONFIGURE CACHE
API Docs (local system only)	/apiViewer/index.html
Version	5.0.0-dev
API Version	5.0.0
Build	1191
Build Type	nightly
Database Host	localhost:5432
JVM Version	21.0.5
Uptime	2 days 0 hours 9 minutes 16 seconds
Total Memory	632 MB
Used Memory	171.7 MB
Free Memory	460.3 MB
Main Rio Server OS Name	Windows 11
Main Rio Server OS Version	10.0
Main Rio Server Cores	22

**Figure 120** The System screen.

2. Click **Set DB Password**.

Update Database Passwords X

*Please backup the database before changing passwords and wait until the system is running at minimal load. Leave either blank to keep the current password.*

Rio DBO Password	Confirm
_____	_____
Rio Query Password	Confirm
_____	_____

SUBMIT

**Figure 121** The Update Database Passwords screen.

3. Enter and confirm the **Rio DBO Password**.
4. Enter and confirm the **Rio Query Password**.
5. Click **Submit**.

# DATABASE RESTORE

Use one of the methods below to restore the Rio application database.

## Restore Database to an Existing 4.x or 5.x Installation

**IMPORTANT**

These instructions apply to Rio software versions 4.x and 5.x only. For instructions for earlier versions of Rio software, contact Spectra Logic Technical Support.

1. Stop the Spectra RioBroker Windows service.
2. Restore the Rio database ("rio\_db\_dev") PostgreSQL database using this command:

```
pg_restore.exe --verbose --host=localhost --port=5432 --  
username=postgres --clean --dbname=rio_db RioBroker-postgres.dump
```

**Notes:** • The .EXE should already be in the PATH.

- You will be prompted for the PostgreSQL administrator password
- Any step with "broker\_object" in the name will run much slower than others

3. Start the Spectra RioBroker Windows service.

**Note:** You do no need to restore the cluster.json, keys.keytool, nor postgres.json files.

## Restore Database to an Existing Rio 3.x Installation

Contact Spectra Logic Technical Support.

# DATABASE TRANSFER

Use one of the methods below to transfer the Rio application database.

## Transfer Rio 4.x/5.x Database to a Rio 4.x/5.x Installation

1. If necessary, uninstall the Rio application software.
2. If necessary, remove the RioBroker database ("rio\_db") database from PostgreSQL:
  - a. Launch the **PostgreSQL -> pgadmin 4** application.
  - b. Expand **Servers**, you will be prompted for the postgres administrator password.
  - c. Expand **Databases**.
  - d. Right-click on the RioBroker database ("rio\_db") database and select **Delete** or **Delete (force)**.

If you are going to use different passwords for the DBO and QUERY PostgreSQL roles, then remove them. If you are not sure, then just remove them, they will be re-created by step #4 below

- a. Expand **Login/Group Roles**.
- b. Right-click on DBO role ("rio\_dbo") and select **Delete**.
- c. Right-click on QUERY role ("rio\_login") and select **Delete**.
3. Install the RioBroker application. See [Install the Spectra Rio MediaEngine Application on page 26](#) for instructions.
4. In a web browser, enter <https://localhost:5050> and press Enter.
5. Choose **New Cluster**, and configure the cluster as required.
6. Stop the RioBroker Windows service.
7. Restore the RioBroker database ("rio\_db") PostgreSQL database using this command. You will need to replace "HOST" and "PORT" with the values for your environment:

```
pg_restore.exe --verbose --host=localhost --port=5432 --
username=postgres --clean --dbname=rio_db RioBroker-postgres.dump
```

**Notes:** • The .EXE should already be in the PATH.

- You will be prompted for the PostgreSQL administrator password
- Any step with "broker\_object" in the name will run much slower than others

8. Copy the following files from this ZIP archive into the application program data.
  - a. Replace the files in C:\ProgramData\Spectra Logic Corporation\SpectraRioBroker\config
    - cluster.json
    - postgres.json
  - b. Replace the files in C:\ProgramData\Spectra Logic Corporation\SpectraRioBroker\data
    - keys.keytool
    - ldaps-keys.keytool (Only present if user login using LDAP with TLS is configured)

9. If any resources files were captured by the backup, you may copy them to:

C:\ProgramData\Spectra Logic Corporation\SpectraRioBroker\resources

**Note:** See the README.txt file included in the above folder for details.

10. Start the RioBroker Windows service.

## Transfer Rio 3.5 Database to Rio 4.x/5.x Installation



### IMPORTANT

These instructions apply to RioBroker version 3.5 **only**. For earlier versions of software, contact Spectra Logic Technical Support.

See [Updating the Rio MediaEngine Application on the next page](#) for instructions on how to transfer a RioBroker 3.5 database to a newer version of the application software.

# UPDATING THE RIO MEDIAENGINE APPLICATION

Use the information in this section to update the Rio MediaEngine application.

## Updating from Version 4.x or Later

1. **Download** the updated software installer from Spectra Logic.
2. **Backup** the Rio application database. Navigate to the Database Backup screen in the Rio application interface and then click **Run Now**.
3. **Run** the installer and overwrite the previous installation. For assistance navigating the install wizard screens, see [Install the Spectra Rio MediaEngine Application on page 26](#).
4. **Reboot** the Windows host, if required.

## Updating from Version 3.5



### IMPORTANT

These instructions apply to RioBroker version 3.5 **only**. For earlier versions of software, contact Spectra Logic Technical Support.

### Backup RioBroker Configuration

Before updating the RioBroker software, you must backup the existing installation configuration settings. This backup ensures you can restore your existing configuration in the case of a failure during the software update.

Migrating an existing RioBroker application from 3.5 to 4.x or Rio MediaEngine 5.x requires a RioBroker application backup. The migration backup requires the **Arango**, **config**, and **data** sub folders.

1. In the Windows Services application, right-click the **Spectra RioBroker Server** row and select **Stop**.
2. Backup the program information:
  - a. Using **Windows Explorer**, navigate to the installation directory.

**Note:** The default location is:

C:\ProgramData\Spectra Logic Corporation\SpectraRioBroker

- b. Copy the entire directory, and save it to a different location.
3. Uninstall the RioBroker 3.5 application.

## Install the PostgreSQL Service

Before updating the software to RioBroker 4.x or Rio MediaEngine 5.x, you must install the PostgreSQL service. The PostgreSQL service must be version 16.0 or higher.

1. Decide an installation location for the PostgreSQL service. You may install PostgreSQL to the same server as the RioBroker application. Consider installing PostgreSQL to a different server in the following circumstances:
  - A PostgreSQL service is already running on the local network, and you want to add the RioBroker database to the existing service.
  - The server does not have enough free disk space for the PostgreSQL service and the RioBroker application and database.
  - You expect an impact on performance with PostgreSQL and RioBroker on the same server.
  - You want your PostgreSQL service and RioBroker database on a Linux server.
2. Download the PostgreSQL installer from  
<https://www.enterprisedb.com/downloads/postgres-postgresql-downloads>.
3. Launch the PostgreSQL service installer.
4. On the Select Components screen of the install wizard, select the **PostgreSQL Server**, **pgAdmin 4**, and **Command Line Tools** components.
5. Follow the instructions on the PostgreSQL installation wizard to complete the installation.
6. If the PostgreSQL service is installed on a different server than the RioBroker master node, or if you intend to configure multiple RioBroker data nodes, you must enable and configure remote connections for the PostgreSQL service.
  - a. As a Windows administrator, open the file found at  
`C:\Program Files\PostgreSQL\16\data\pg_hba.conf`

**Note:** You may need to adjust the value in red depending on the version of PostgreSQL you have installed.

- b. Add the following line to the end of the file:

```
host all all 0.0.0.0/0 md5
```

- c. Save and close the file.

After installing the PostgreSQL service, you must add the PostgreSQL **bin** folder to the Windows system execution PATH. Use the steps below:

1. Search for and open the **Edit the systems environment variables** option in Windows.
2. On the Advanced tab, click **Environmental Variables...**
3. In the System Variables window, select the Path line and click **Edit**.

4. In the Edit environment variable window, click **New** then click **Browse**.
5. Navigate to the PostgreSQL install location and select the **bin** folder.
6. Click **OK**.
7. Use the **Move Up** button to raise the PostgreSQL bin entry to the top of the list.
8. Click **OK** to close the Environmental Variables window.
9. Close all remaining Windows Setting dialogue windows.

**Note:** To verify PostgreSQL connectivity, enter the following command on a Windows Command Prompt, using the values set for host and port during installation:

```
psql --host=localhost --port=5432 --username=postgres
```

## Upgrade Software

1. If necessary, download the RioBroker 4.x or Rio MediaEngine 5.x installer.
2. If necessary, in the Windows Services application, right-click the Spectra RioBroker Server row and click **Stop**.
3. Launch the Rio application installer.
4. Proceed through the installation wizard, and click **Finish**.
5. After installation is complete, **restart** the host computer.
6. After the host server completes the reboot, launch the RioBroker application and select **New Cluster**.
7. Enter information into the **New Cluster** text fields.
  - a. In the **PostgreSQL Host** entry field, enter the hostname or IP address of the server where you installed the PostgreSQL service.
  - b. In the **PostgreSQL Port** entry field, enter the port of the server where you installed the PostgreSQL service. The default port is 5432.
  - c. In the **PostgreSQL AdminLogin** entry field, enter the admin login username created during installation. The default admin login name is 'postgres'.
  - d. In the **Admin Password** entry field, enter the desired admin login password.
  - e. In the **Confirm** entry field, re-enter the desired admin login password.
8. Select **Migrate database from RioBroker 3.x**.

The screenshot shows a user interface for migrating a database. At the top, there is a checked checkbox labeled "Migrate database from RioBroker 3.x". Below it is a section labeled "RioBroker 3.x Backup" with a text input field and a placeholder "Full path to database backup folder". The next section is "RioBroker 4.x Backup Directory" with a text input field and a placeholder "Migrated database will be exported here for comparison". The final section is "Migrate Job History Days" with a text input field and a placeholder "Number of days of job history to migrate (0 for none)". At the bottom right is a "SUBMIT" button.

**Figure 122** The RioBroker Migrate Database Options Screen.

- a. In the **RioBroker 3.x Backup** entry field, enter the full path to the RioBroker 3.x backup folder. The RioBroker 3.x backup folder must contain the following sub folders: **Arango**, **config**, and **data**.
  - b. In the **RioBroker 4.x Backup Directory** entry field, enter the full path to a previously created folder to store a full database backup. Ensure the designated folder is write enabled and has enough storage space for the file size of your RioBroker 3.x backup files.
  - c. In the **Migrate Job History Days** entry field, enter the number of days of job history to retain. The amount of job history retained impacts the migration completion time. Spectra Logic recommends a maximum of 90 days.
9. Click **Submit** to begin the migration process.

**Note:** For the duration of the migration, all RioBroker APIs are unavailable, and the RioBroker GUI is unresponsive. To monitor migration progress, open the file located at  
C:\Program Files\Spectra Logic  
Corporation\SpectraRioBroker\arango\migrate\_progress.html

## Updating from Version 3.4 or Earlier

Contact Spectra Logic Technical Support.


# CHAPTER 7 - USE AND MONITOR A BLACKPEARL SYSTEM IN THE RIO MEDIAENGINE INTERFACE

If your Rio MediaEngine configuration includes a BlackPearl system, use the information in this chapter to use the embedded BlackPearl dashboard to easily perform commonly used functions of the BlackPearl system and quickly view the status of critical aspects of the system.

<b>Access the BlackPearl Dashboard</b>	<b>154</b>
<b>View the Status of the BlackPearl System</b>	<b>155</b>
View System Overview	155
View Notifications	156
View Jobs	157
View Buckets	158
View Pools	159
View Tape Partitions - Main View	160
View Tape Partitions - Tape State View	161
View Tape Drives	162
View Tape Management	163
<b>Dashboard Actions</b>	<b>164</b>
Export a Tape Cartridge	164
Online a Tape Cartridge	164
Verify a Tape Cartridge	165
Change Job Priority	165
Start a Storage Pool Verification	165
Create a Bucket	166
Put a Tape Partition into Standby	166
Offline a Tape Drive	167

# ACCESS THE BLACKPEARL DASHBOARD

To access the BlackPearl dashboard, click the **Gear** icon, then **BlackPearl > Name** of the BlackPearl system.

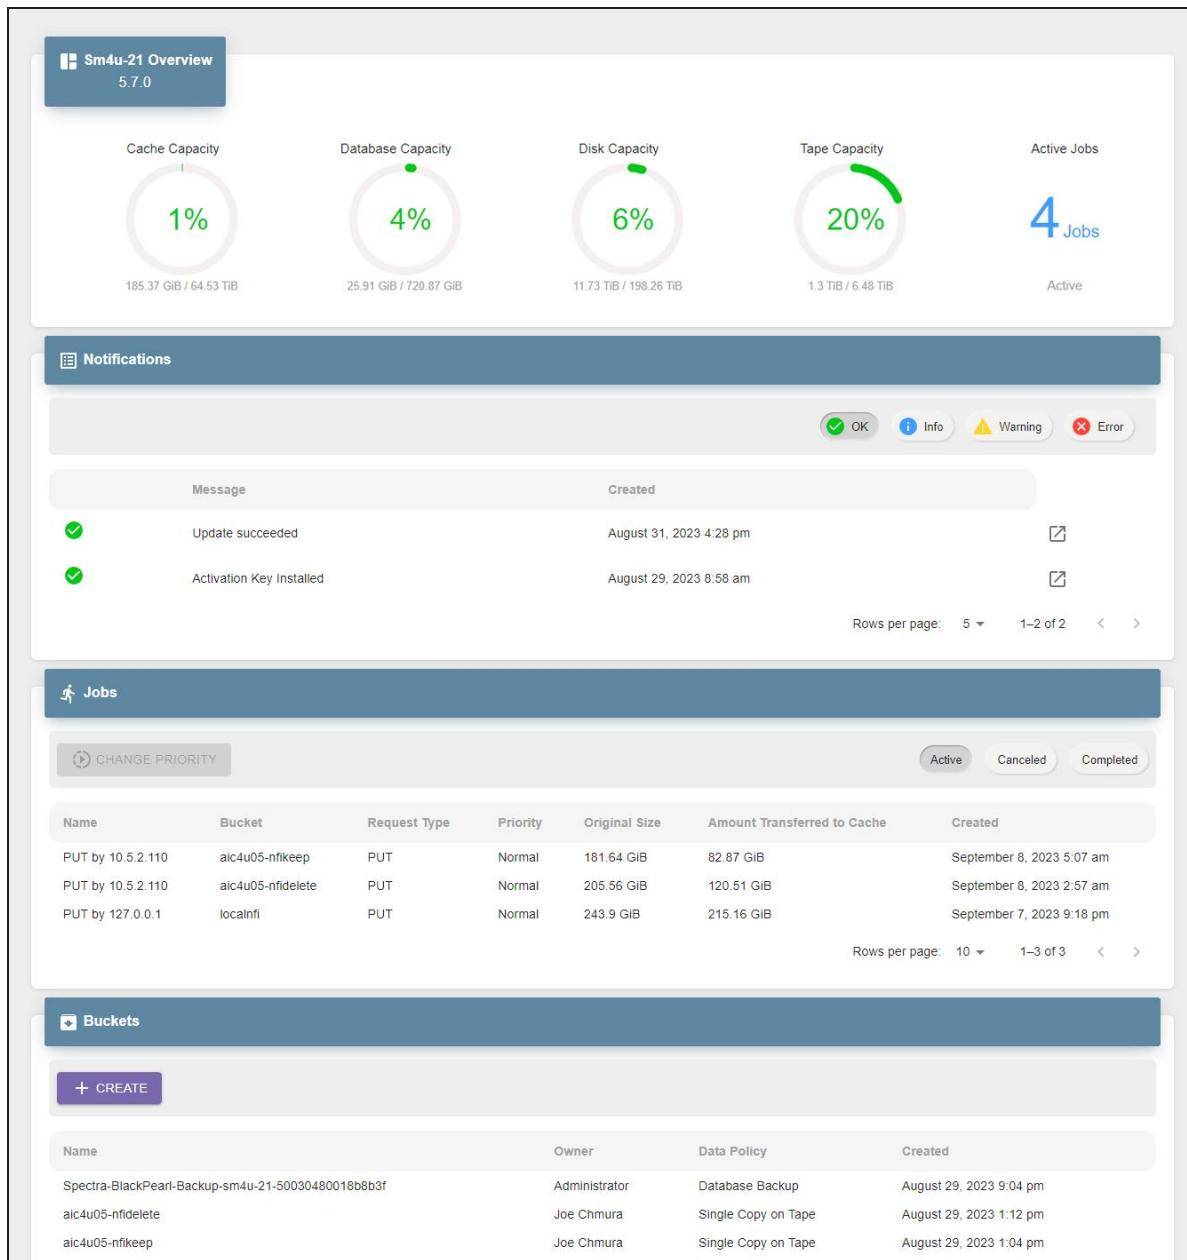


**Figure 123** The Embedded Dashboard.

# VIEW THE STATUS OF THE BLACKPEARL SYSTEM

Use the sections below to view the status of multiple aspects of the BlackPearl system.

## View System Overview


The Overview pane provides a quick look at the most critical aspects of the BlackPearl system.

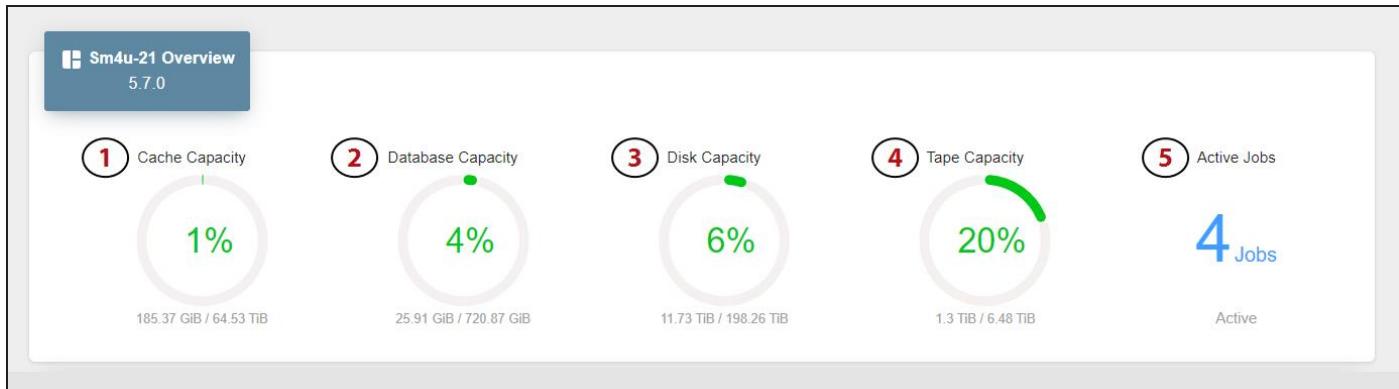

**Figure 124** The Overview pane.

1. The BlackPearl cache capacity and percentage of used cache space.
2. The capacity of the BlackPearl database and percentage of used space.
3. The capacity of all disk-based storage connected to the BlackPearl system and percentage of used space.
4. The capacity of all tape-based storage in the tape library connected to the BlackPearl system and percentage of used space.
5. The number of active jobs running on the BlackPearl system.

Mouse-over the green section of any percentage graph to display the amount of used space, and over the gray section to display the amount of remaining space.

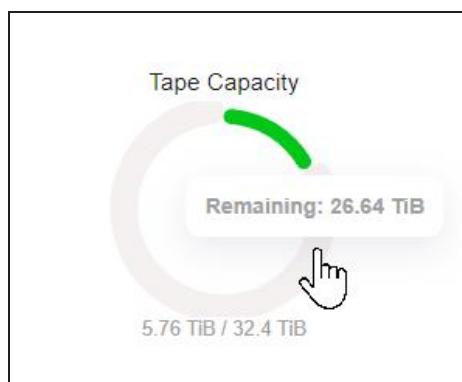

**Figure 125** Mouse-over a graph to view specific details.

## View Notifications

Notifications provide information about errors that occur on the system, caution messages that alert you to issues that may impact your workflow, and informational messages. Additionally, notifications may provide troubleshooting advice to help you resolve issues that may occur.

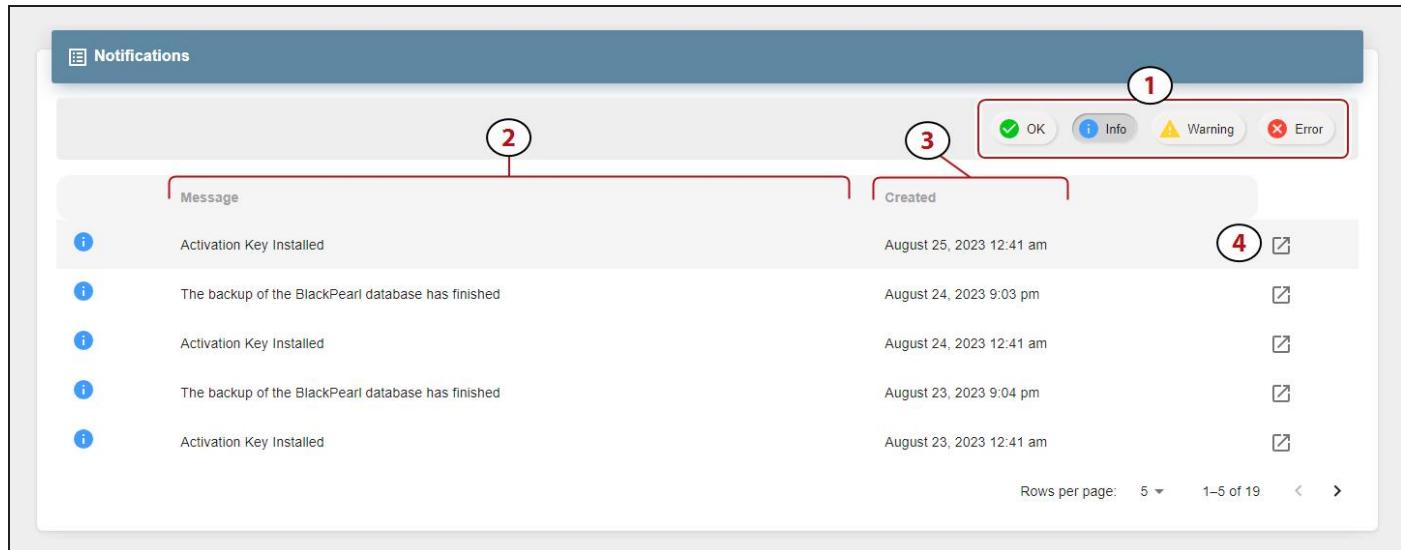


Figure 126 The Notifications pane.

1. Use the **Notification Type** buttons to switch between OK, Info, Warning, and Error messages.
2. Contains a brief description of the notification.
3. Displays the timestamp the notification was generated.
4. Click the **Details Button** to view additional message **Details** and **Troubleshooting Advice**.


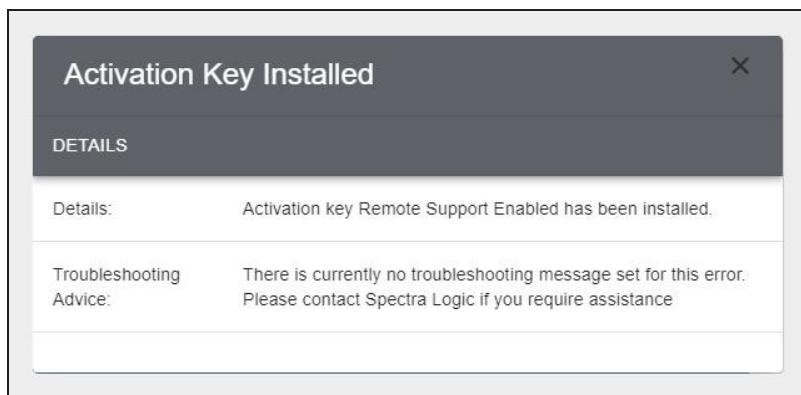


Figure 127 The Notification details dialog box.

## View Jobs

The Jobs pane provides information on each Active, Canceled, or Completed job processed by the BlackPearl system.

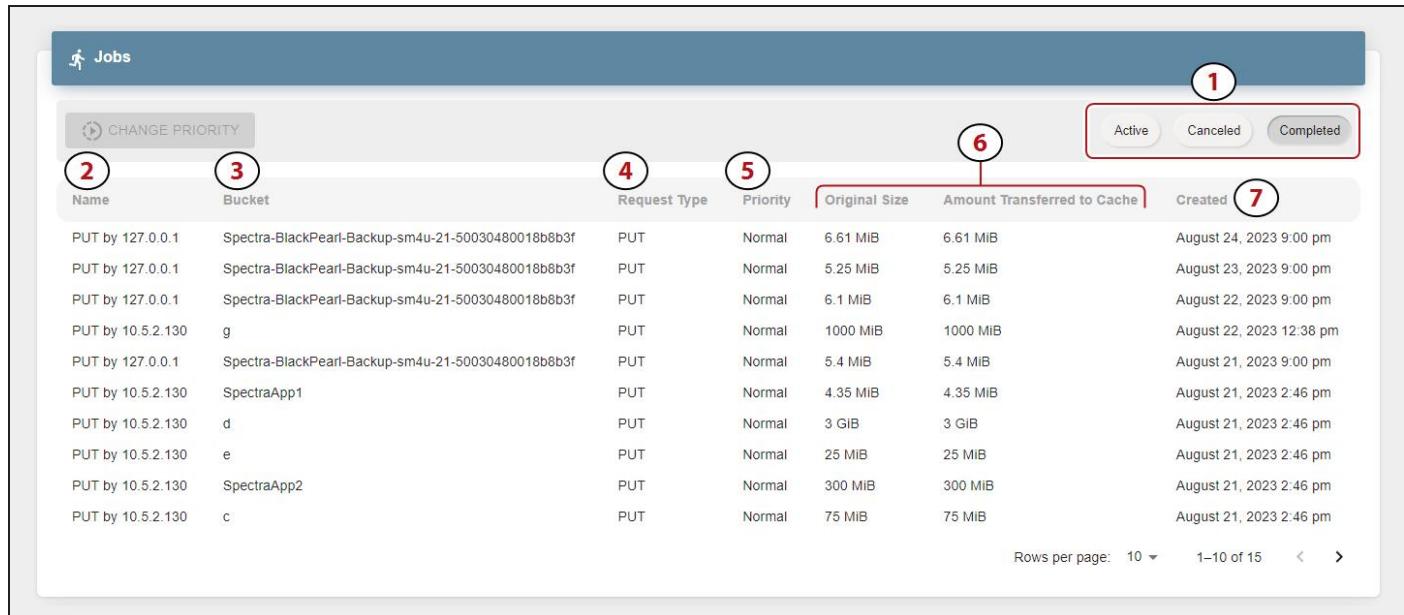

The screenshot shows the 'Jobs' pane with the following data and UI elements:

Name	Bucket	Request Type	Priority	Original Size	Amount Transferred to Cache	Created
PUT by 127.0.0.1	Spectra-BlackPearl-Backup-sm4u-21-50030480018b8b3f	PUT	Normal	6.61 MIB	6.61 MIB	August 24, 2023 9:00 pm
PUT by 127.0.0.1	Spectra-BlackPearl-Backup-sm4u-21-50030480018b8b3f	PUT	Normal	5.25 MIB	5.25 MIB	August 23, 2023 9:00 pm
PUT by 127.0.0.1	Spectra-BlackPearl-Backup-sm4u-21-50030480018b8b3f	PUT	Normal	6.1 MIB	6.1 MIB	August 22, 2023 9:00 pm
PUT by 10.5.2.130	g	PUT	Normal	1000 MIB	1000 MIB	August 22, 2023 12:38 pm
PUT by 127.0.0.1	Spectra-BlackPearl-Backup-sm4u-21-50030480018b8b3f	PUT	Normal	5.4 MIB	5.4 MIB	August 21, 2023 9:00 pm
PUT by 10.5.2.130	SpectraApp1	PUT	Normal	4.35 MIB	4.35 MIB	August 21, 2023 2:46 pm
PUT by 10.5.2.130	d	PUT	Normal	3 GiB	3 GiB	August 21, 2023 2:46 pm
PUT by 10.5.2.130	e	PUT	Normal	25 MIB	25 MIB	August 21, 2023 2:46 pm
PUT by 10.5.2.130	SpectraApp2	PUT	Normal	300 MIB	300 MIB	August 21, 2023 2:46 pm
PUT by 10.5.2.130	c	PUT	Normal	75 MIB	75 MIB	August 21, 2023 2:46 pm

UI Elements (numbered):

- Jobs pane header
- Name column header
- Bucket column header
- Request Type column header
- Priority column header
- Original Size and Amount Transferred to Cache columns
- Created column header

Page navigation: Rows per page: 10 ▾ 1-10 of 15 < >


**Figure 128** The Jobs pane.

1. Use the **Job Type** buttons to switch between Active, Canceled, and Completed jobs.
2. The name of the job includes the job type and the IP address of the job initiator.
3. The bucket used in the PUT or GET operation.
4. The type of job request.
5. The assigned priority of the job.
6. The original size and amount of data transferred to the BlackPearl cache.
7. Displays the timestamp of when the job was initiated.

Use the **Change Priority** button to change the priority of an active job. See [Change Job Priority on page 165](#) for more information.

## View Buckets

The Buckets pane provides information about all buckets configured on the BlackPearl system.

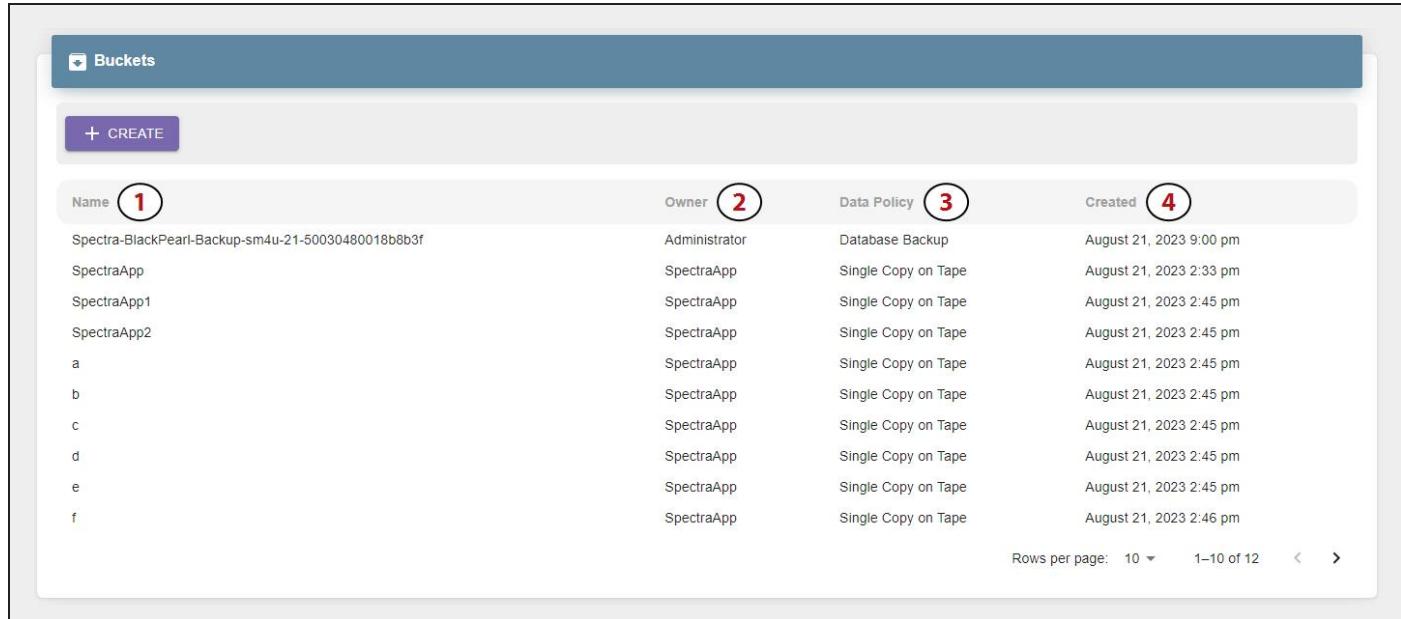

The screenshot shows a table with the following data:

Name	Owner	Data Policy	Created
Spectra-BlackPearl-Backup-sm4u-21-50030480018b8b3f	Administrator	Database Backup	August 21, 2023 9:00 pm
SpectraApp	SpectraApp	Single Copy on Tape	August 21, 2023 2:33 pm
SpectraApp1	SpectraApp	Single Copy on Tape	August 21, 2023 2:45 pm
SpectraApp2	SpectraApp	Single Copy on Tape	August 21, 2023 2:45 pm
a	SpectraApp	Single Copy on Tape	August 21, 2023 2:45 pm
b	SpectraApp	Single Copy on Tape	August 21, 2023 2:45 pm
c	SpectraApp	Single Copy on Tape	August 21, 2023 2:45 pm
d	SpectraApp	Single Copy on Tape	August 21, 2023 2:45 pm
e	SpectraApp	Single Copy on Tape	August 21, 2023 2:45 pm
f	SpectraApp	Single Copy on Tape	August 21, 2023 2:46 pm


**Figure 129** The Buckets pane.

1. Displays the name of the bucket
2. The bucket owner configured on the BlackPearl system.
3. The data policy used by the bucket.
4. Displays the timestamp of when the bucket was created.

The **Create** button to create a new bucket. See [Create a Bucket](#) on page 166 for instructions.

## View Pools

The Pools pane displays information about all disk storage pools configured on the BlackPearl system including dedicated BlackPearl cache and database pools.

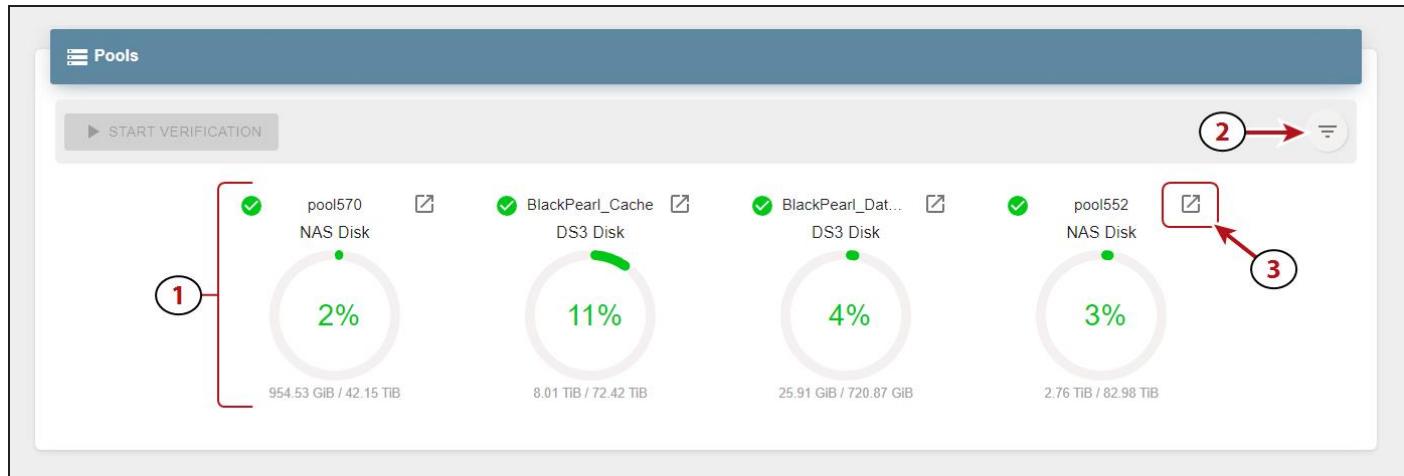

**Figure 130** The Pools pane.

1. Each percentage graph displays both the used and remaining space for the associated pool.
2. Use the **Filter** button to select which pools to display on the Pools pane.
3. Click the **Details** button to view additional information about a specified pool.




**Figure 131** The pool details dialog box.

Use the **Start Verification** button to verify the data contained on the pool. See [Start a Storage Pool Verification](#) on page 165 for more information.

## View Tape Partitions - Main View

The Tape Partitions pane displays information about the tape partitions configured on the tape library attached to the BlackPearl system. The Tape Partitions pane features both a main view and a tape cartridge state view.

To display the main view, manipulate the slider (2) to the left position.

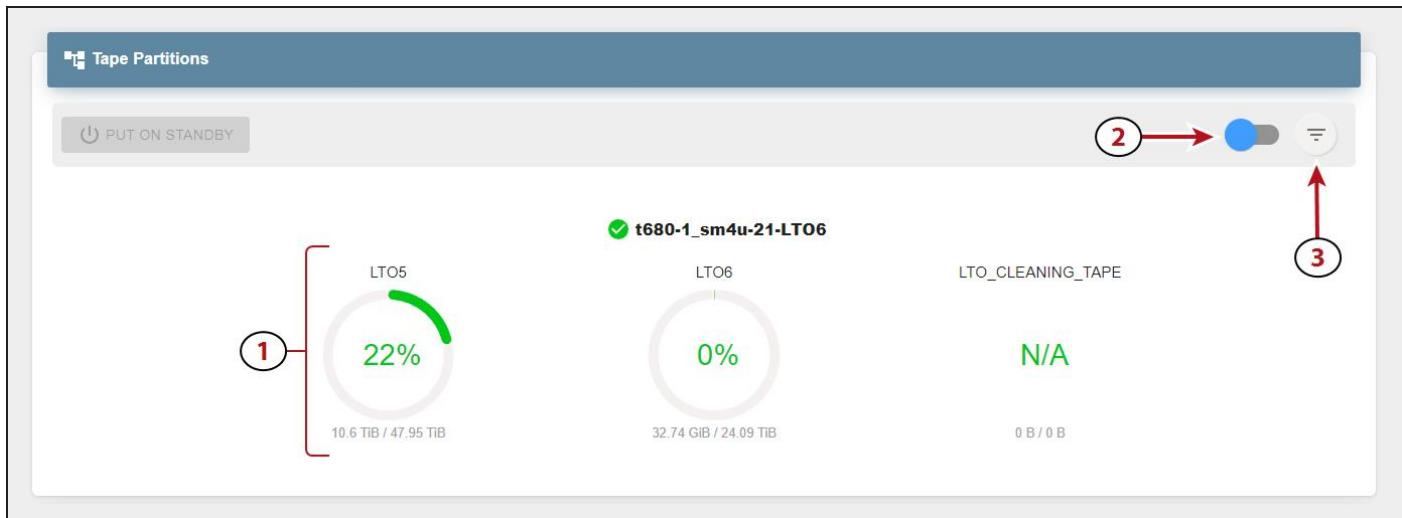

**Figure 132** The Tape Partitions pane - main view.


1. Each percentage graph displays both the used and remaining space for the associated type and generation of media present in the tape partition. Mouse-over the green section of any percentage graph to display the amount of used space, and over the gray section to display the amount of remaining space.
2. Use the slider to change the display a graph of the current state of each tape cartridge present in the partition.
3. Use the **Filter** button to select which pools to display on the Tape Partitions pane.

If you need to service the tape library, you can put a tape partition into a standby state. See Put a Tape Partition into Standby on page 166 for more information.

## View Tape Partitions - Tape State View

The Tape Partitions pane displays information about the tape partitions configured on the tape library attached to the BlackPearl system. The Tape Partitions pane features both a main view and a tape cartridge state view.

To display the tape cartridge state view, manipulate the slider (2) to the right position.

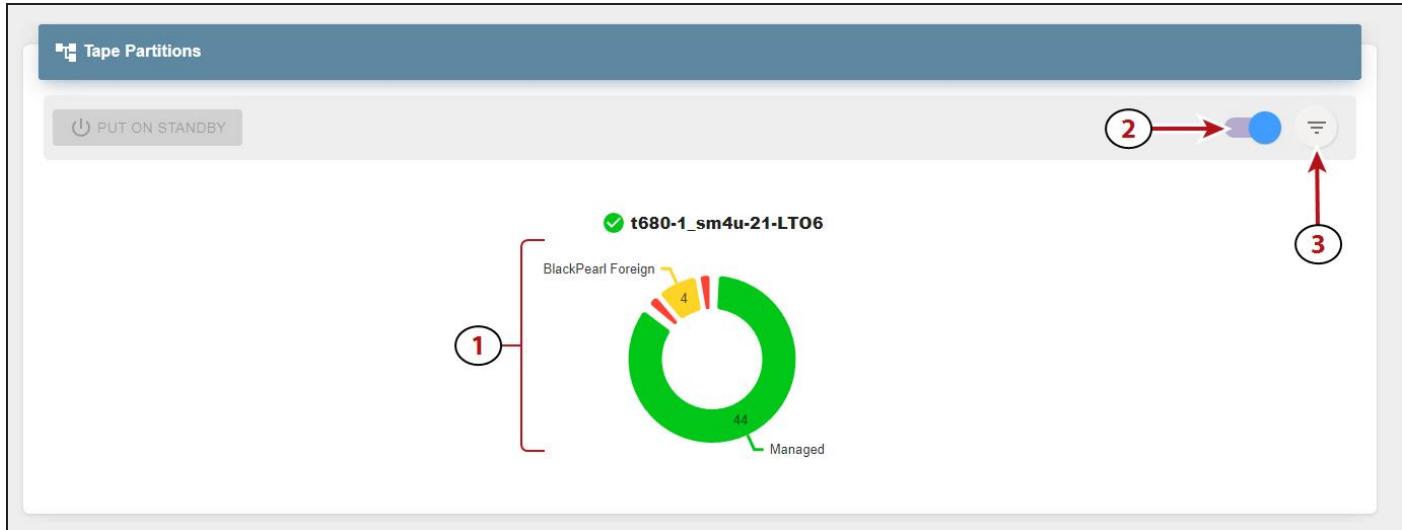


**Figure 133** The Tape Partitions pane - main view.

1. The state of all tape cartridges in the partition. Each state combines different generations of tape media if present. Mouse-over any part of the graph to display more detailed information.
2. Use the slider to change the display a graph of the current state of each tape cartridge present in the partition.
3. Use the **Filter** button to select which pools to display on the Tape Partitions pane.

If you need to service the tape library, you can put a tape partition into a standby state. See [Put a Tape Partition into Standby](#) on page 166 for more information.

## View Tape Drives

The Tape Drives pane displays information about all tape drives installed in the tape library connected to the BlackPearl system.

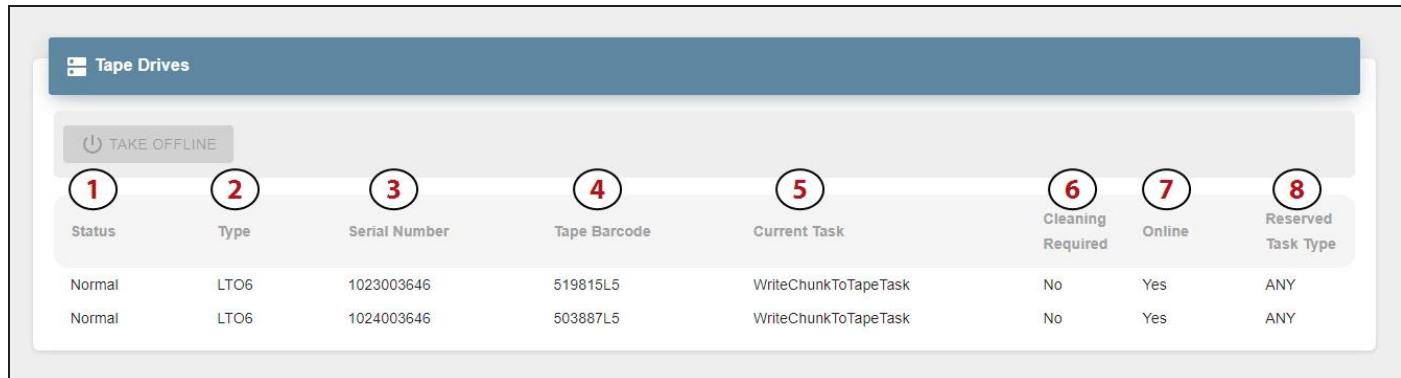

The screenshot shows the 'Tape Drives' pane with the following data:

1 Status	2 Type	3 Serial Number	4 Tape Barcode	5 Current Task	6 Cleaning Required	7 Online	8 Reserved Task Type
Normal	LTO6	1023003646	519815L5	WriteChunkToTapeTask	No	Yes	ANY
Normal	LTO6	1024003646	503887L5	WriteChunkToTapeTask	No	Yes	ANY


**Figure 134** The Tape Drives pane.

1. The current status of the tape drive.
2. The drive type and generation.
3. The drive serial number as assigned by the tape library.
4. The physical barcode of the tape cartridge loaded into the tape drive. This field is blank when no tape is loaded.
5. The current task being performed by the drive. This field is blank when no task is in progress.
6. Indicates if the tape drive requires cleaning.
7. Indicates if the tape drive is online or offline.
8. The reserved task type, if configured. The default setting is Any.

Use the **Take Offline** button to take the drive offline. See [Offline a Tape Drive on page 167](#) for more information.

## View Tape Management

The Tape Management pane displays the status of all managed tapes in the tape library connected to the BlackPearl system.

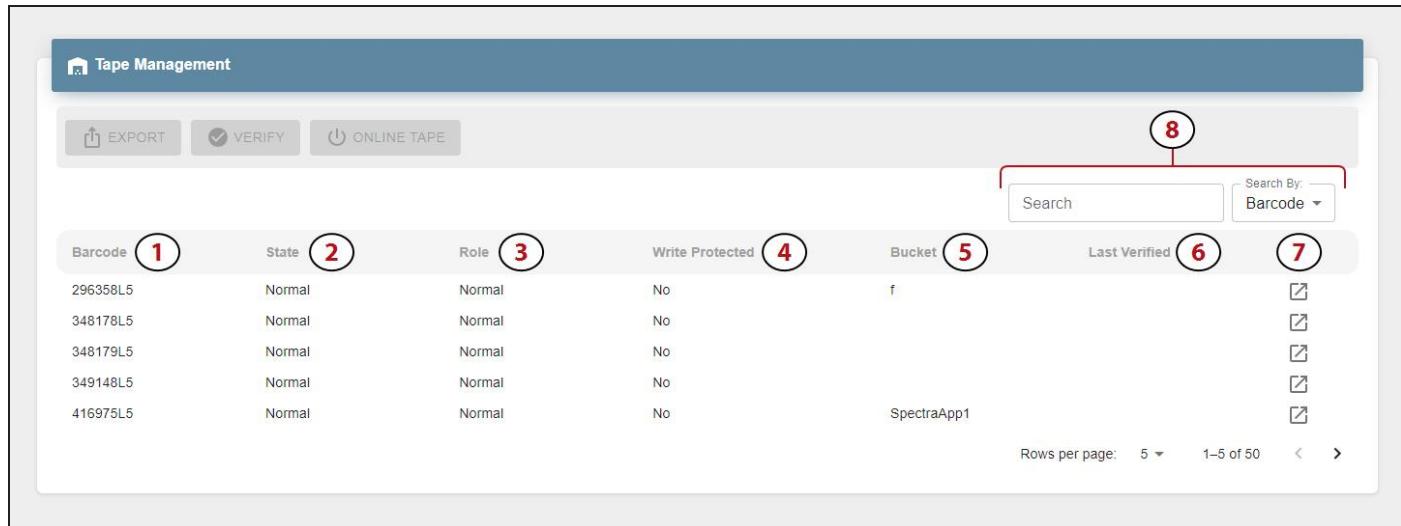

The screenshot shows the 'Tape Management' pane with the following details:

- Header:** Tape Management, with buttons for EXPORT, VERIFY, and ONLINE TAPE.
- Search:** A search bar labeled 'Search' and a dropdown 'Search By: Barcode'.
- Table Headers:** Barcode (1), State (2), Role (3), Write Protected (4), Bucket (5), and Last Verified (6).
- Table Data:**

Barcode	State	Role	Write Protected	Bucket	Last Verified
296358L5	Normal	Normal	No	f	2023-01-10 12:00:00
348178L5	Normal	Normal	No		2023-01-10 12:00:00
348179L5	Normal	Normal	No		2023-01-10 12:00:00
349148L5	Normal	Normal	No		2023-01-10 12:00:00
416975L5	Normal	Normal	No	SpectraApp1	2023-01-10 12:00:00
- Page Controls:** Rows per page (5), Page 1-5 of 50, and navigation arrows.

**Figure 135** The Tape Management pane.

1. The physical barcode label on the tape cartridge.
2. The current state of the tape cartridge. See [State](#) on page 1 for more information.
3. Indicates if the tape is configured for use as a **Normal** or **Test** tape.
4. The physical **Write Protected** status of the tape cartridge.
5. The name of any BlackPearl bucket(s) present on the tape cartridge.
6. Displays the timestamp of the last tape verification.
7. Click the **Details** button to display additional information about the selected tape cartridge.
8. Use the **Search** entry field and **Search By** drop-down menu to find a specific tape cartridge.

See one of the following sections for instructions to export, verify, or online a tape cartridge:

- [Export a Tape Cartridge](#) on the next page
- [Verify a Tape Cartridge](#) on page 165
- [Online a Tape Cartridge](#) on the next page


## DASHBOARD ACTIONS

In addition to displaying information about the BlackPearl system, the embedded dashboard allows you to perform the most frequently-used actions as described in the sections below.

### Export a Tape Cartridge

Exporting a tape cartridge prepares it for physical removal from the attached tape library. In a Spectra Logic tape library, the cartridge is moved from the storage pool to the Entry/Exit pool, before it is physically exported from the library at the library front panel.

1. In the BlackPearl dashboard, navigate to the **Tape Management** pane.
2. **Select** the tape you want to export.
3. Click **Export**.
4. If desired, edit the **Export Label** and **Export Location**.

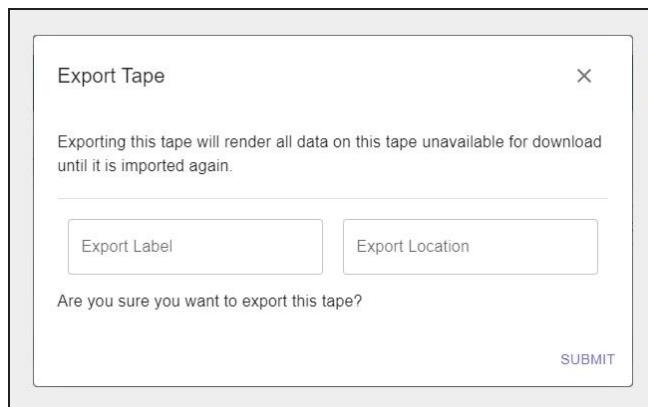

**Figure 136** The Export Tape dialog box.

5. Click **Submit**.

### Online a Tape Cartridge

Setting a tape cartridge to "online" prepares the cartridge for use by the BlackPearl system. This allows the system to use the tape cartridge for data storage operations.

Here is how to online a tape cartridge:

1. In the BlackPearl dashboard, navigate to **Tape Management**.
2. Select a tape in the **Offline** state.
3. Click **Online Tape**.
4. Click **Submit**.

## Verify a Tape Cartridge

The BlackPearl system can perform a data integrity verification of all data on a selected tape cartridge to confirm it is still viable. While the verification is in progress, client access has priority over the data integrity scan.

Here is how to verify a tape cartridge:

1. In the BlackPearl dashboard, navigate to **Tape Management**.
2. **Select** the tape you want to verify.
3. Click **Verify Tape**.
4. Click **Submit**.

## Change Job Priority

If desired, you can change the priority of an active job on the BlackPearl system.

Here is how you change the priority of a job:

1. In the BlackPearl dashboard, navigate to the **Jobs** pane.
2. If necessary, click **Active** to display the list of active jobs.
3. **Select** the job for which you want to change priority.
4. Use the **drop-down** menu to select a new priority for the job.
5. Click **Submit**.

## Start a Storage Pool Verification

The BlackPearl system can perform a data integrity verification of all data on a selected storage pool to confirm it is still viable.

Here is how to start data verification on a storage pool:


1. In the BlackPearl dashboard, navigate to the **Pools** pane.
2. **Select** the pool that you want to verify.
3. Click **Start Verification**.
4. Click **Submit**.

## Create a Bucket

Buckets on the BlackPearl system are data transfer targets for read and write operations. When you create a new bucket on the solution, you assign it a owner and a data policy. You can then use the new bucket in your other Spectra software applications as a target for data storage on the BlackPearl solution.

Here is how you create a new bucket:

1. In the BlackPearl dashboard, navigate to the **Buckets** pane.
2. Click **Create**.
3. Enter a **Bucket Name**.

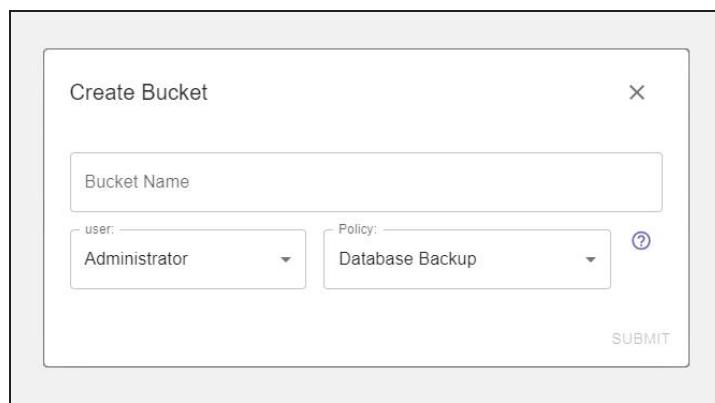

**Figure 137** The Create Bucket dialog box.

4. Using the **User** drop-down menu, select an owner for the bucket.
5. Using the **Policy** drop-down menu, select a data policy for the bucket.
6. Click **Submit**.

## Put a Tape Partition into Standby

If you need to perform service on the tape library associated with your BlackPearl gateway, or with the BlackPearl gateway itself, you must first put the tape library into a standby state. Otherwise, the BlackPearl gateway may attempt to use the tape library while it is in service.

**Note:** After the tape partition is placed in standby, any currently running tape operations continue until they are complete, which may take 30 minutes or longer.

Here is how to out a tape partition into standby:

1. In the BlackPearl dashboard, navigate to the Tape Partitions pane.
2. Select the partition you want to set to standby.
3. Click **Put On Standby**.
4. Click **Submit**.

## Offline a Tape Drive

If a tape drive is experiencing errors and needs to be physically replaced, the drive can be taken offline to prevent the BlackPearl system from using the drive for data storage operations until the replacement is complete.

Here is how to offline a tape drive:

1. In the BlackPearl dashboard, navigate to the **Tape Drives** pane.
2. **Select** the drive you want to offline.
3. Click **Take Offline**.
4. Click **Submit**.

# CHAPTER 8 - TECHNICAL SUPPORT

Spectra Logic Technical Support provides a worldwide service and maintenance structure, refined over many years to provide timely, professional service.

---

<b>Accessing the Technical Support Portal</b> .....	<b>169</b>
Create an Account .....	169
Log Into the Portal .....	170
<b>Opening a Support Ticket</b> .....	<b>171</b>
Search for Help Online .....	171
Submit an Incident Online .....	175
Submit an Incident by Phone .....	177

# ACCESSING THE TECHNICAL SUPPORT PORTAL


The Spectra Logic Technical Support portal provides access to the Knowledge Base, the current version of BlueVision software for the library, drive firmware, drive device drivers, and additional service and support tools. You can also open or update a support incident.

## Create an Account

Access to *User Guides* and compatibility matrices does not require you to create an account. You must create a user account and log in to access *Release Notes*, to download the latest version of Vail software, or to open a support incident.


**Note:** If you have multiple Spectra Logic products, the serial numbers for all products will be associated with your account. If you do not see the serial numbers for all of your products when you log in, contact Technical Support (see [Contacting Spectra Logic on page 3](#)).

1. Access the Technical Support portal login page at [support.spectralogic.com](http://support.spectralogic.com).
2. On the home page, click **Register Now**.

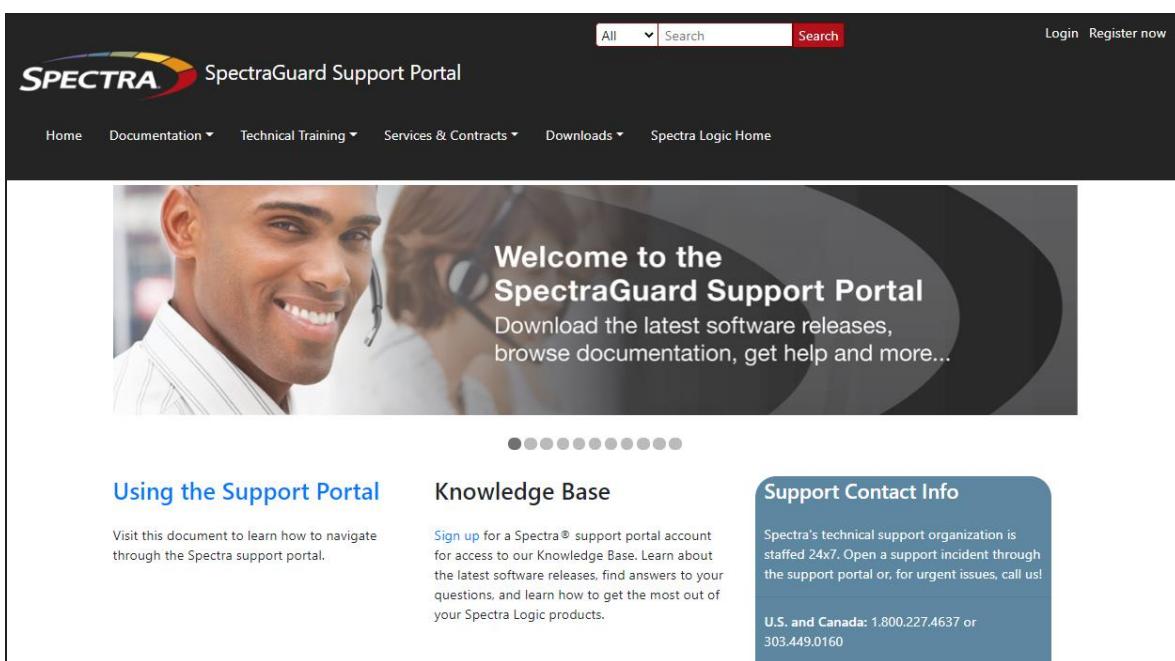

**Figure 138** The Spectra Logic Technical Support portal home page.

3. Enter your registration information. Your account is automatically associated with the serial numbers of all Spectra Logic products owned by your site.
  - If you have an invitation, follow the link and enter the invitation code.

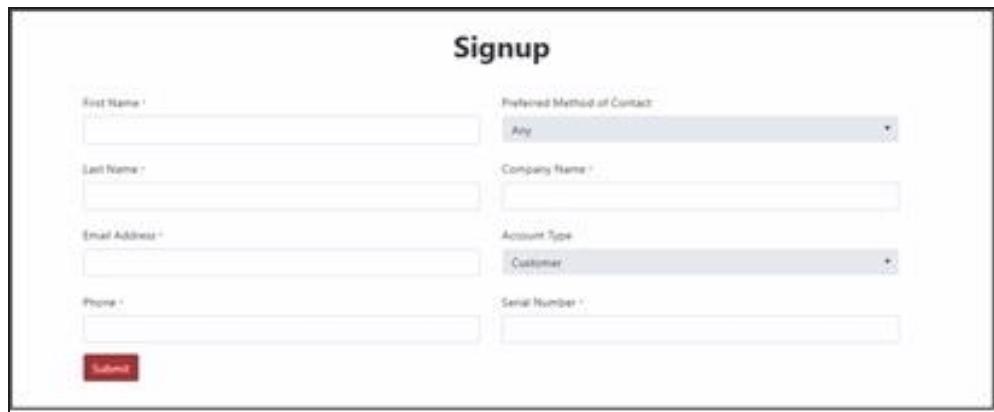

The screenshot shows a 'Signup' form with the following fields:

- First Name: Text input field
- Last Name: Text input field
- Email Address: Text input field
- Phone: Text input field
- Preferred Method of Contact: A dropdown menu with 'Any' selected
- Company Name: Text input field
- Account Type: A dropdown menu with 'Customer' selected
- Serial Number: Text input field

A red 'Submit' button is located at the bottom left of the form.

**Figure 139** The Signup screen.

- If you do not have an invitation, enter the requested information to create your account. When you are finished, click **Submit**.

When the account is approved, you receive an email with an initial password. Use your email address and the password provided in the email to log in to your account. After you log in, you can change your password if desired.

## Log Into the Portal

1. Access the Technical Support portal login page at [support.spectralogic.com](http://support.spectralogic.com).
2. Use your email address and password to log into the Technical Support Portal.

# OPENING A SUPPORT TICKET

You can open a support incident using the Spectra Logic Technical Support portal or telephone.

## Search for Help Online



**Figure 140** The Spectra Logic Technical Support portal home page.

1. Make notes about the problem, including what happened just before the problem occurred.
2. Gather the following information:
  - Your Spectra Logic customer number
  - Company name, contact name, phone number, and email address
  - The library serial number on the **Configuration>Settings** screen.
  - Type of host system being used
  - Type and version of host operating system being used
  - Type and version of host storage management software being used
3. If necessary, log in to the Support Portal by clicking **Login**, enter your **email address** and **password**, and click **Log in**.

**Note:** See [Technical Support](#) on page 168 if you have not previously created an account on the Technical Support portal.

4. From any page, select **Incident>Incidents & Inventory**.

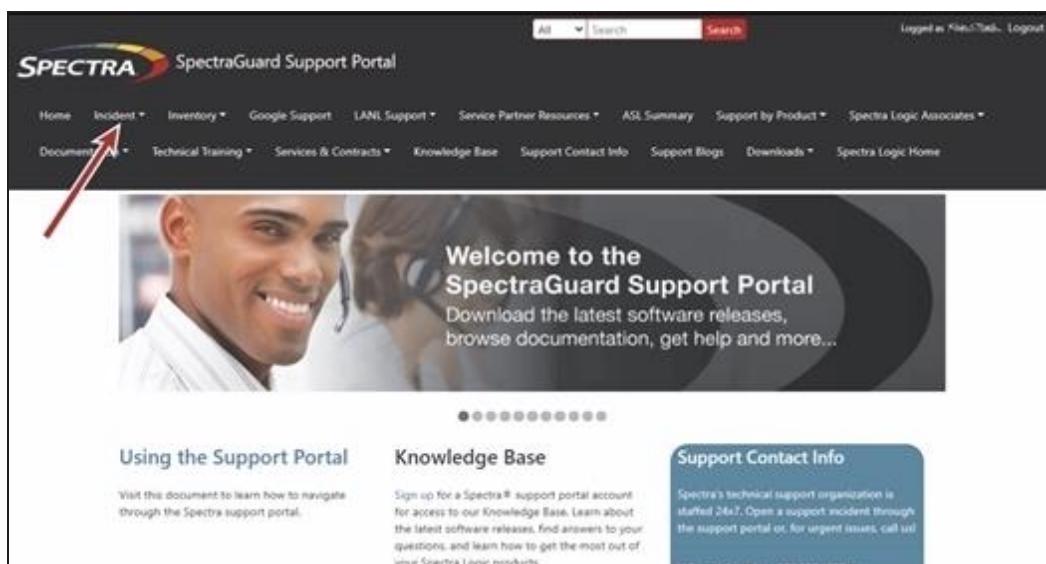


Figure 141 Select **Incidents>Incidents & Inventory**.

5. Select **Open or View Incidents**.


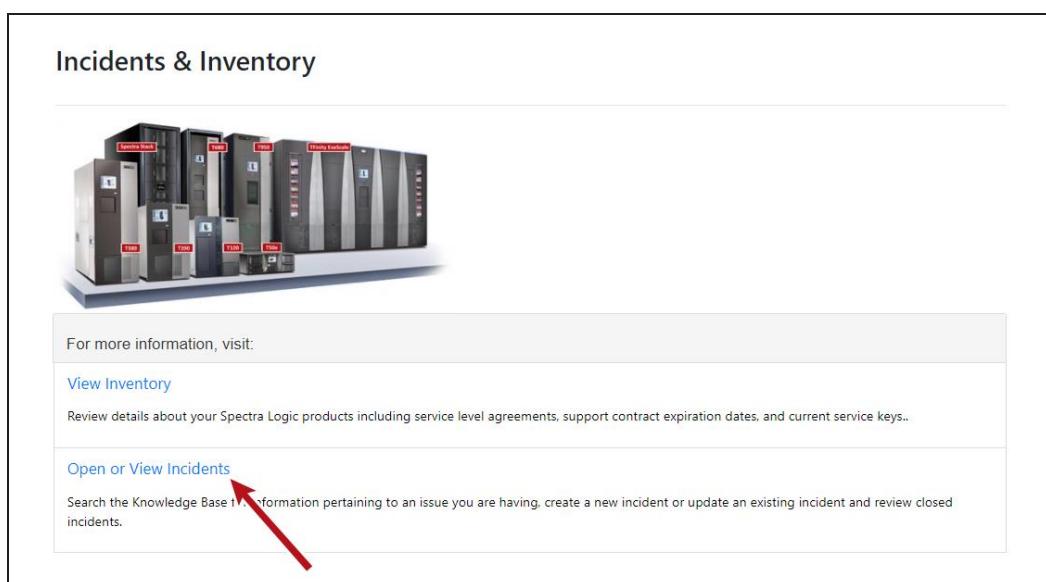



Figure 142 Select **Open or View Incidents**.

6. In the Search dialog box, enter a term or phrase about your problem (1) and click **Search** (2).

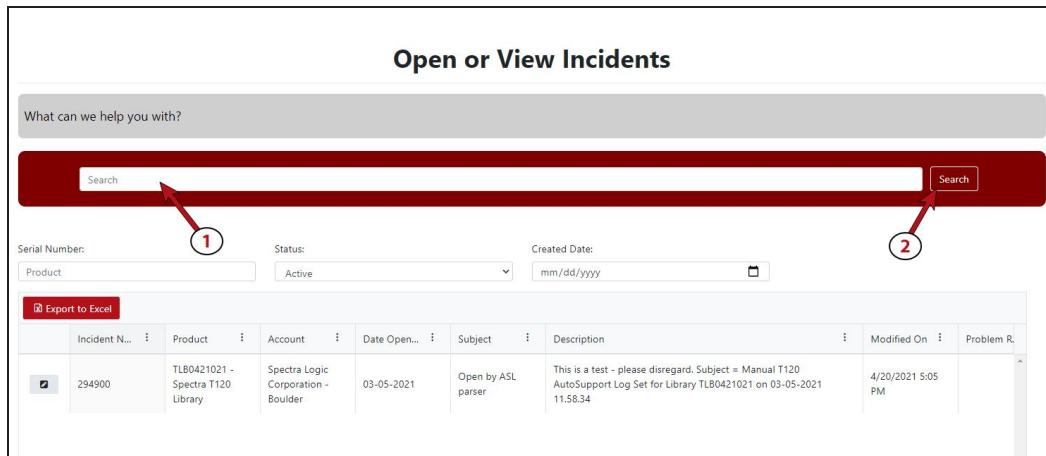

**Figure 143** Enter a search phrase and click **Search**.

7. If the search does not provide an answer, click **Open a New Incident**.

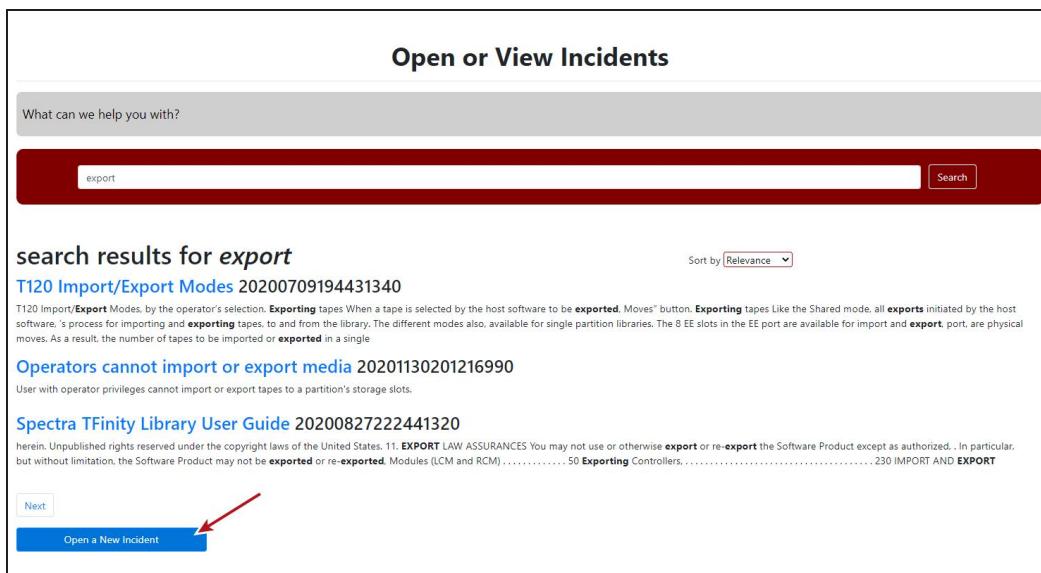

**Figure 144** Click **Open a New Incident**.

8. On the Create Incident page, enter the requested information providing as much detail as possible. When you are finished, click **Submit**.

**Create Incident**

Severity \*

Problem Description \*

Email addresses to include in correspondence

Customer \*

Product \*

Select files...

DELIVERY Address For Shipping Parts

6101 Lookout Rd. Boulder, CO 80301-3580 UNITED STATES

Confirm The Ship To Address

**Submit**

**Figure 145** Enter information about your incident and click **Submit**.

## Submit an Incident Online

1. Make notes about the problem, including what happened just before the problem occurred.
2. Gather the following information:
  - Your Spectra Logic customer number
  - Company name, contact name, phone number, and email address
  - The library serial number on the **Configuration>Settings** screen.
  - Type of host system being used
  - Type and version of host operating system being used
  - Type and version of host storage management software being used
3. If necessary, log in to the Support Portal by clicking **Login**, enter your **email address** and **password**, and click **Log in**.

**Note:** See [Technical Support on page 168](#) if you have not previously created an account on the Technical Support portal.

4. From any page, select **Inventory>My Inventory**.
5. Locate the row of the product for which you want to submit an incident and click **Create Incident**.

	Prod...	Product Ni...	Account	SLA	ASM	Supp...	Servi...	Action
	0906802 - Spectra T680 Library	Fishbowl	Spectra Logic Corporation - Boulder	Next Business Day Replacem...	None	31/12/2050	3BB 3HN BB7 DNB 2AZ	<a href="#">Renew Contract</a> <a href="#">Create Incident</a>
	1724A05 - Spectra TFinity Library	Training Room	Spectra Logic Corporation - Boulder	Next Business Day Replacem...	None	31/12/2050	WXY YCG L4X TT4 HVS	<a href="#">Renew Contract</a> <a href="#">Create Incident</a>
	1311A06 - Spectra TFinity Library		Spectra Logic Corporation - Boulder	Next Business Day Replacem...	None	31/12/2050	FTJ 4DV ZLC YHB Z6B	<a href="#">Renew Contract</a> <a href="#">Create Incident</a>

**Figure 146 Click Create Incident.**

6. On the Create Incident page, enter the requested information providing as much detail as possible. When you are finished, click **Submit**.

## Create Incident

Severity \*

Problem Description \*

Email addresses to include in correspondence

Customer \*

Product \*

Select files...

DELIVERY Address For Shipping Parts

6101 Lookout Rd, Boulder, CO 80301-3580 UNITED STATES

Confirm The Ship To Address

**Submit**

**Figure 147** Enter information about your incident and click **Submit**.

## Submit an Incident by Phone

Contact Spectra Logic Technical Support by phone using the information below.

<b>Spectra Logic Technical Support</b>	
<b>Technical Support Portal:</b> <a href="http://support.spectralogic.com">support.spectralogic.com</a>	
<b>United States and Canada</b> Phone: Toll free US and Canada: 1.800.227.4637 International: 1.303.449.0160	<b>Europe, Middle East, Africa</b> Phone: 44 (0) 870.112.2185 <b>Deutsch Sprechende Kunden</b> Phone: 49 (0) 6028.9796.507
<b>Additional international numbers available at</b> <a href="http://support.spectralogic.com/home">support.spectralogic.com/home</a> <b>If you have a Spectra Logic Portal account, please log in for country-specific numbers at</b> <a href="http://support.spectralogic.com/support-contact-info">support.spectralogic.com/support-contact-info</a>	